

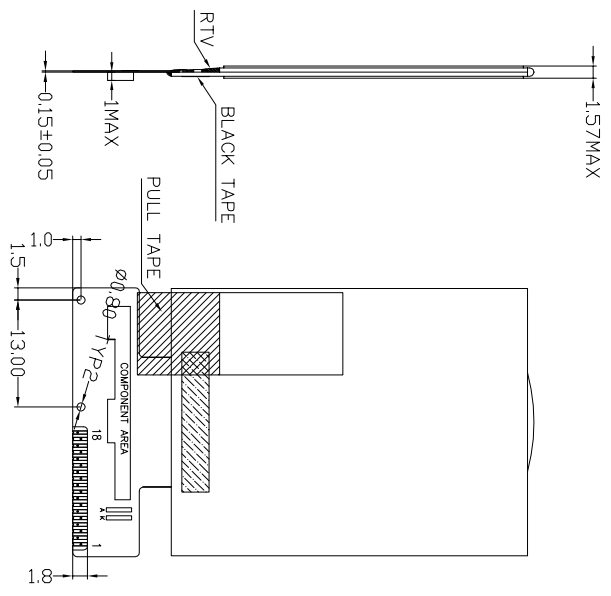


THE DRAWING ON THIS PRINT AND INFORMATION THEREON ARE PROPRIETARY TO VARRITRONIX AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION OF VARRITRONIX.

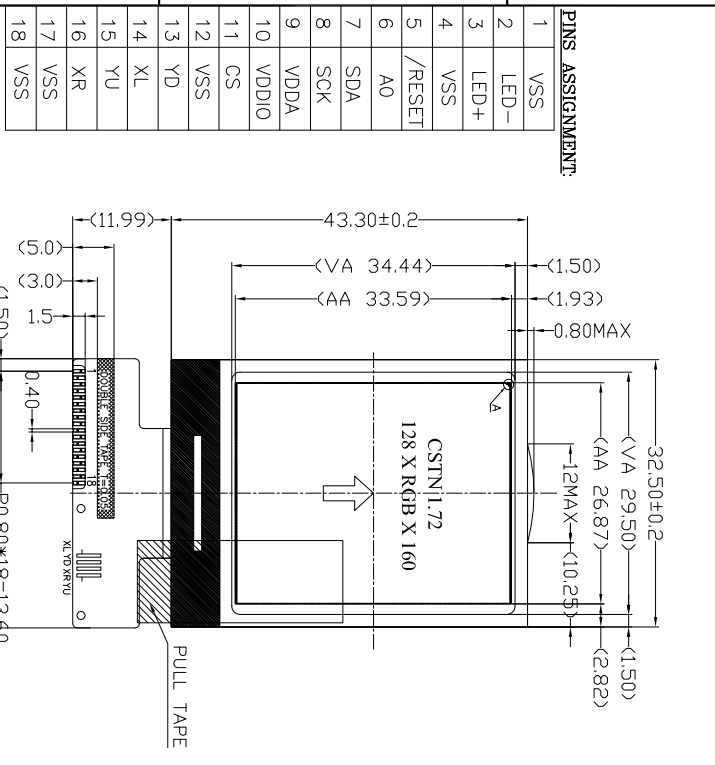

DETAIL A
 (DOT SIZE FOR CUSTOMER REFERENCE ONLY)

DISPLAY TYPE	CSTN,65K
DISPLAY RESOLUTION	128 X RGB X 160
VIEWING ANGLE	6.0° CLOCK
MUX RATIO & BIAS	- - -
LCD CONTROLLER/DRIVER	UC1698V
LOGIC VOLTAGE	-2.8V
OPERATING TEMPERATURE	-20°C TO +70°C
STORAGE TEMPERATURE	-30°C TO +80°C

NOTES:
 1. ◊ : SPECIAL CHARACTERISTIC
 2. + : SAFETY CHARACTERISTIC
 3. * : CRITICAL DIMENSION
 4. (.) : REFERENCE DIMENSION

ISSUE	AMENDMENT	DATE

TITLE: LCM Module Specification	
PROJECT NO: COG-C172MWHC-04	
CUSTOMER REF: IN	
TOLERANCE UNLESS OTHERWISE SPECIFIED: X.X ±0.3	
DIMENSIONS IN MM ANGULAR: ±1°	
MATERIAL: N/A FINISH: N/A	
SCALE: 100 NOT ON SCALE OVERALL THK: N/A	
THIRD ANGLE PROJECTION	
DRAWN: RAIN PAN	DATE: 09.06.26
CHECKED: ZHONG GLAM	
APPROVED: ZHANG REDSUN	
ITEM NO.: COG-C172MWHC-04	
DESCRIPTION: COG-C172MWHC-04	
FILE NO: COG-C172MWHC-04.DWG REV: 0	
SHEET 1	OF 1

