

LED MODULES

ST6 Series



Blue

Green

Red

White

RGB

Features

- IP65 Rated.
- Multiple application for 7-18cm lighting box channel letters and signs.
- Crystal Lens on LED's for LED Chip Protection.
- One Unit PVC Injection Molding Case.
- Average Wattage Consumption up to 1.2W per Module.

Input Voltage

- 12V DC.

Application

- Channel Letters
- Thin and Thick Light Boxes
- Around Ceiling Molding.
- Under Cabinets.

Qualifications




LED MODULES

ST6 Series

Specifications

SKU #	Model #	Watts	Color	Qualified	Lumens	CCT	Size	LED Type
109421	BLT12W3KST6	1.2W	Warm White	UL	132lm/module	3000K	25'/50Pcs	Epistar
109793	BLT12W6KST6	1.2W	White	UL	132lm/module	6500K	25'/50Pcs	Epistar
110411	110411	.72W	RGB	UL	N/A	N/A	25'/50Pcs	Epistar
150463	BLT-S-PK-0.5G3	.72W	Green	CE & ROHS	N/A	N/A	25'/50Pcs	Epistar
150464	BLT-S-PK-0.5R3	.72W	Red	CE & ROHS	N/A	N/A	25'/50Pcs	Epistar
150465	BLT-S-PK-0.5B3	.72W	Blue	CE & ROHS	N/A	N/A	25'/50Pcs	Epistar

Drawing

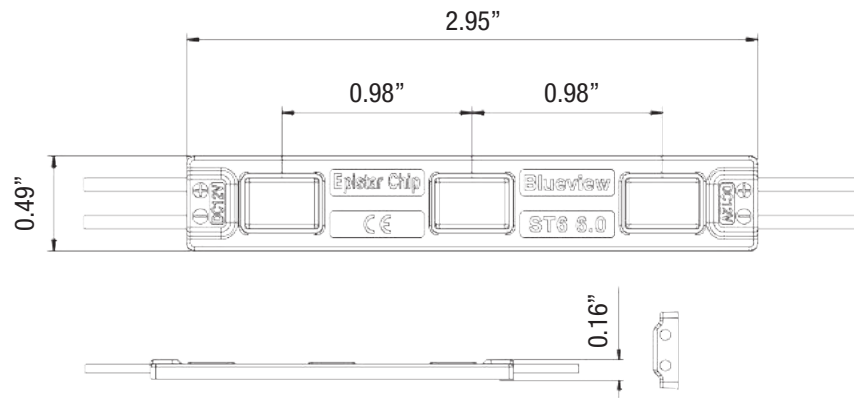

Packaging



Contents of Each Bag:

- 50 Modules
- 25 Ft in Length