

**IDCM Series**

**Slim Line  
DC Input Module**

**UL** File E29244

Users should thoroughly review the technical data before selecting a product part number. It is recommended that users also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

**Features**

- Slim line .4" (10.16mm) thick package.
- Foot print same as .6" (15.24mm) thick package.
- 4000V rms optical isolation.
- Color coded by function.
- High immunity to false operation.
- Series compatible.
- Compatible with 2IOM series mounting boards.

**Engineering Data**

- Switch Form:** 1 Form A (SPST-NO)
- Duty:** Continuous.
- Operating Temperature:** -30°C to +80°C.
- Storage Temperature:** -30°C to 100°C.
- Potting Compound Flammability:** UL94V-0.
- Solderability:** 260°C for 5 seconds, maximum.
- Approximate Weight:** .87 oz. (22.1g).

**Ordering Information**

		Typical Part Number >	IDCM	-5	A
<b>1. Basic Series: IDCM</b> = Slim line DC input module — white case					
<b>2. Logic Voltage:</b> 5 = 5VDC 15 = 15VDC 24 = 24VDC					
<b>3. Input:</b> Blank = 3.3-32VDC input ** A = 10-60VDC input ** F = 4-32VDC input & fast turn-on & turn-off times **					

\*\* Is not polarity sensitive.

**Our authorized distributors are more likely to maintain the following items in stock for immediate delivery.**

IDCM-5

**Input Specifications**

Parameter	Conditions	Units	IDCM-5			IDCM-5A			IDCM-5F		
			IDCM-15	IDCM-24		IDCM-15A	IDCM-24A		IDCM-15F	IDCM-24F	
			Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.
Control Voltage Range $V_{IN}$		VDC	3	24	32	10	30	60	4	24	32
Must Operate Voltage $V_{IN(OP)}$		VDC			3			10			4
Must Release Voltage $V_{IN(REL)}$		VDC	1			1			1		
Max. Input Current	@ $V_{IN} = \text{Max.}$	mA	0.1 - 10			0.1 - 10			0.1 - 10		
Input Resistance		Ohms	Current Regulator								


**IDCM Series**(Continued)

**DC Input Modules**


**Output Specifications (@ +25°C unless otherwise specified)**

Parameter	Conditions	Units	IDCM-5			IDCM-15			IDCM-24		
			IDCM-5A	IDCM-5F		IDCM-15A	IDCM-15F		IDCM-24A	IDCM-24F	
			Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.
Maximum Output Voltage		VDC			30			30			30
Maximum Output Current $I_{SINK}$		mADC			50			50			50
Maximum Output Leakage Current	$V_{OUT}=Max.$	$\mu$ ADC			10			10			10
Maximum Output Voltage Drop	$I_{SINK}=50mA$	VDC			0.2			0.2			0.2
Logic Supply Voltage $V_{CC}$		VDC	3	5	6		15			24	
Maximum Logic Supply Current	$V_{CC}=Max.$	mADC			15		15			15	
Turn-On Time (Nominal)	$I_{SINK}=25mA$	ms		1			1			1	
Turn-Off Time (Nominal)	$I_{SINK}=25mA$	ms		1			1			1	
Output Type (Open Collector)			Normally Open (SINKING)			Normally Open (SINKING)			Normally Open (SINKING)		

**IDCM Operating Diagram**

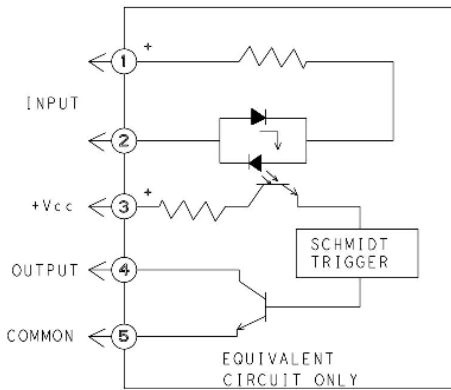

**PCB Layout**

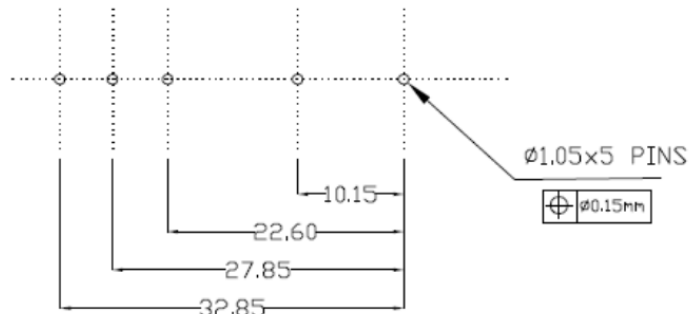

**Outline Dimensions**

