

SOFT-SHIELD® 4850

Multi-Planar Electrically Conductive Foam EMI Shielding Gaskets



Customer Value Proposition

Parker Chomerics SOFT-SHIELD® 4850 is a true multi-planar, Z-axis electrically conductive foam for indoor applications. It is based on the unique integration of electrically conductive silver-plated fibers into a low-density urethane foam, providing for a performance-driven, cost-effective EMI shielding solution. It offers greater EMI shielding performance from other SOFT-SHIELD products which may only consist of an electrically conductive jacket over traditional urethane foam.

Through the optimization of conductive fiber construction, loading and dispersion within the foam matrix, SOFT-SHIELD 4850 provides superb Z-axis conductivity with extremely short ground paths. Since the integrity of the base foam is uncompromised, SOFT-SHIELD 4850 offers exceptional physical and mechanical properties.

SOFT-SHIELD 4850 is flammability rated to UL 94 V-0 and is available in cut sheets, bulk rolls or custom die cut

Contact Information

Parker Hannifin Corporation
Chomerics Division
77 Dragon Court
Woburn, MA 01801

phone 781 935 4850

fax 781 933 4318

chomailbox@parker.com

www.parker.com/chomerics



shapes. A uniform (silver plated, copper particle) electrically conductive acrylic pressure sensitive adhesive (PSA) is available on one side to help secure after installation.

Product Features

- 95 dB shielding effectiveness from 20 MHz to 10 GHz
- Low compression set of less than 15%
- Stable electrical performance (through resistance) after multiple closure cycles
- Excellent through resistance (< 30 milliohm @ 25% gasket deflection)
- Non-nickel bearing material (silver plated fibers)
- Available in cut sheets, bulk rolls or custom die cut shapes

- Z-axis conductivity allows compartmental shielding
- At low deflection (15%) demonstrates optimal electrical performance
- Offered with or without electrically conductive acrylic pressure sensitive adhesive (PSA)
- RoHS, REACH and UL 94 V-0 compliant

Typical Applications

- I/O panels, backplanes, connectors, access panels and rectangular/square strip gasket seals
- Telecom Infrastructure rack and enclosure components
- Servers and desktop PCs
- LCD/PDP large screen TVs
- Indoor electronics applications requiring UL94 V-0 rating



ENGINEERING YOUR SUCCESS.

SOFT-SHIELD® 4850 – Product Information

Table 1 - Typical Properties

Typical Properties	SOFT-SHIELD® 4850	Test Method
Compression-Deflection – 3 mm thick sample	25% - 2.5 psi (17.2 kPa) 50% - 4.3 psi (29.6 kPa)	ASTM C165 (Modified)
Through-Resistance	(See Figure 1)	--
Shielding Effectiveness – 20 MHz to 10 GHz	Average: 95 (dB)	CHO-TM-TP08
Gasket Compression Set	<15%	ASTM D3574
Tensile Strength – 3 mm thick sample	306 lbs/in ² (68.3 kPa)	ASTM D412 (Modified)
Electrically Conductive Acrylic PSA Peel Strength	15 oz/inch	ASTM D1000 (Modified to 90° peel)
Recommended % Deflection Range	15 - 50%	--
Flammability	V-0	UL 94
Operating Temperature	-40° to 70°C	--
Recommended Storage Conditions @ 50% Relative Humidity	70°F ± 20 (21°C ± 10)	--
Shelf Life with PSA, months from date of shipment	24*	--
Shelf Life (no adhesive)	Indefinite	--

* Possible extension of additional twelve (12) months. See Parker Chomerics Shelf Life Re-certification for Laminated Solutions document for procedure.

Figure 1
Deflection vs Resistance - SS4850 w/Conductive PSA (4850-12)
@ 0.05 in/min (1 sq inch area sample)


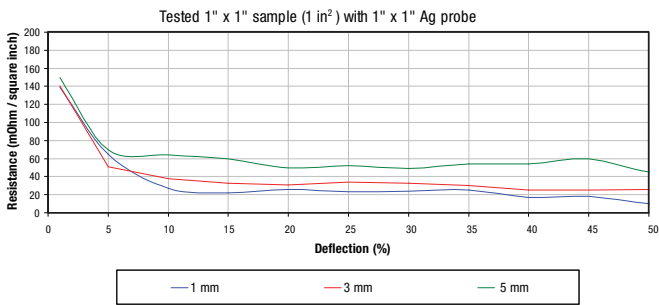


Figure 2
Shielding Effectiveness (dB)
Parker Chomerics SS4850 1" Wide with Conductive PSA

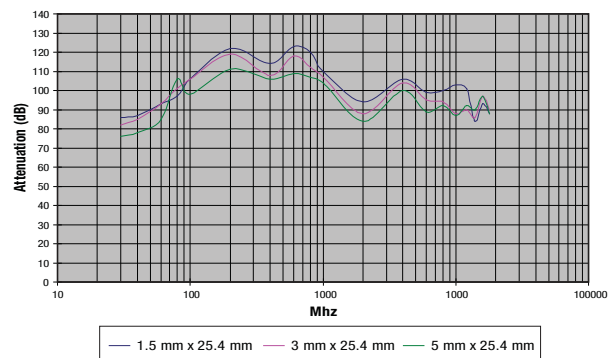

Ordering Information

Table 2 - Part Numbering – 50 ft long bulk rolls and sheets


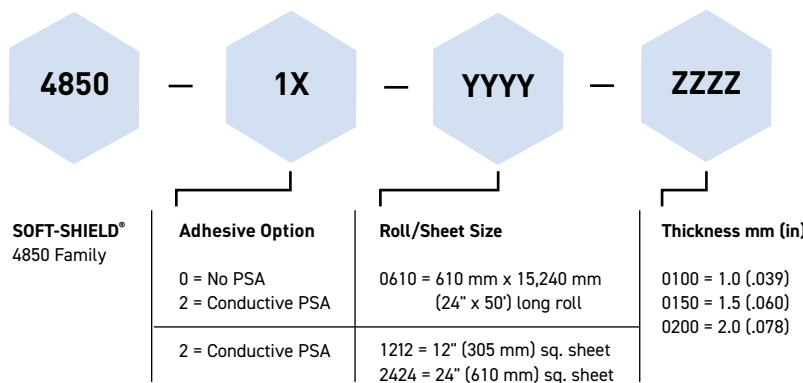


Table 3 - Custom Part Numbering

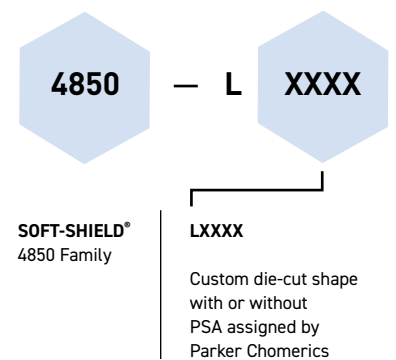

For custom die-cut parts, contact Parker Chomerics Inside Sales.

www.parker.com/chomerics

CHOMERICS and SOFT-SHIELD are registered trademarks of Parker Hannifin Corporation.
© 2021 Parker Hannifin Corporation. All rights reserved.

TB 1022 EN June 2021



ENGINEERING YOUR SUCCESS.