
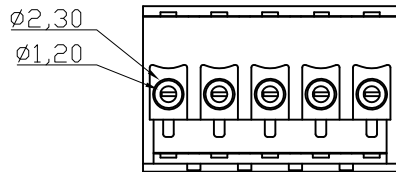
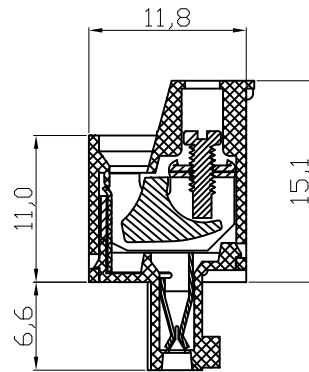


N= NUMBER OF CONTACTS

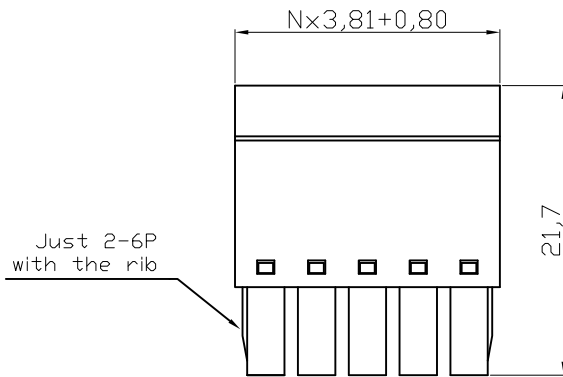

**Material**

Clamp: Steel Zinc plating  
 Terminal screw: Steel Zinc plating"-slot type  
 Female contact: PhBz tin plated  
 Terminal (Up body): Thermoplastic (UL94V-0),Green  
 Terminal (Down body): Thermoplastic (UL94V-0),Green  
 Clampage: Steel Zinc plated

**Electrical** cULus

Voltage rating: 300VAC  
 Current rating: 10A  
 Wire range:  
 Solid wire(AWG): 16-28  
 Stranded wire (AWG): 16-28  
 Torque: 1.7Lb-In.  
 Screw: M2  
 Wire strip length: 6-7mm  
 Withstanding Voltage: 1.6KV  
 Operating temperature: -40°C to +115°C  
 Safety Approval:

**RoHS compliant**

Scale	1:1						Date	Name	Customer-No.
TOLERANCE						Drawn	10.12.2009	Dean	ASSMANN WSW-No. <b>A-TB381-VMxx</b>
X.	±0.50					Approved	27.08.2010	Hellwig	
X.X	±0.30								
X.XX	±0.10								
DIM	TOL	②	Update	27.08.2010	Rale			Drawing-No.	ASS 3847 CO rev02
X.°	±1°	①	Drawn	10.12.2009	Dean				
Angle	TOL	Id.	Modification	Date	Name				