
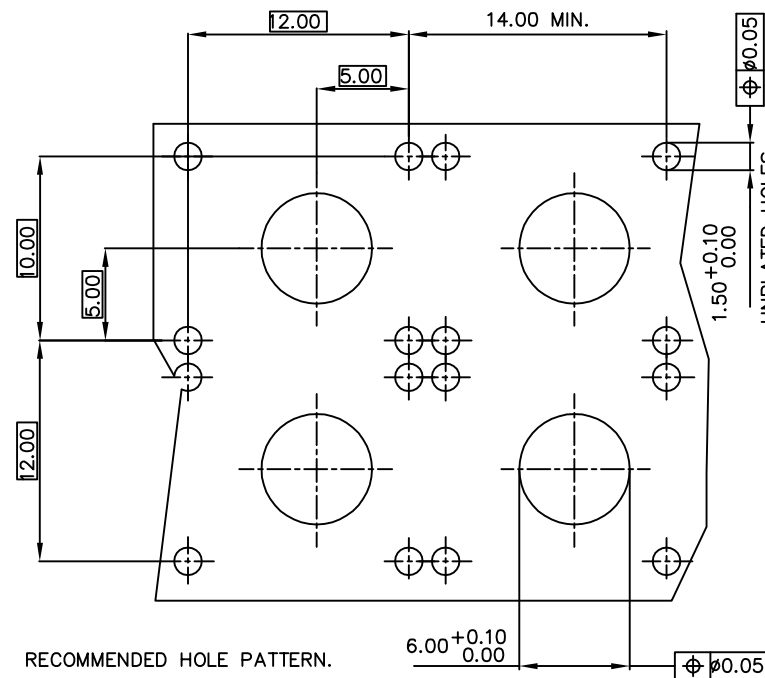
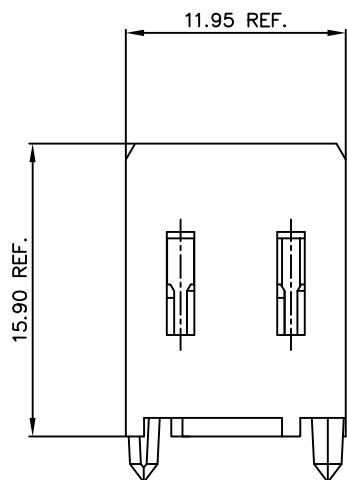
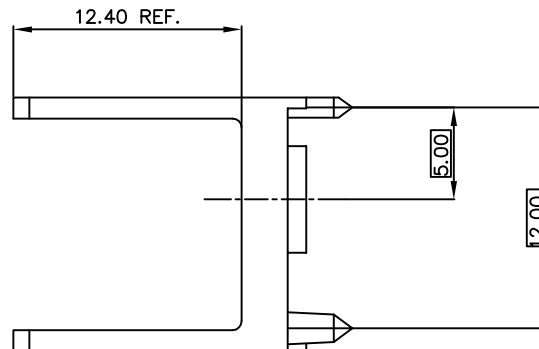


PRODUCT NO. 70290-X01LF

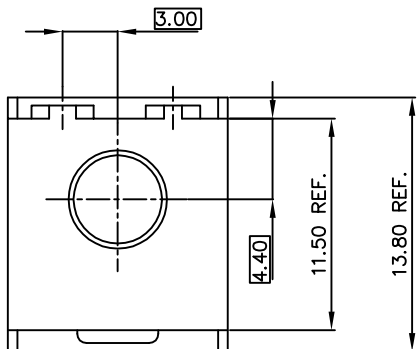

NOTE:

- MATERIAL:
70290-001LF, THERMOPL. POLYESTER 30% GLASS FLAME RETARDANT ACC. UL 94-V0 COLOR GREY.
70290-101LF, LIQUID CRYSTAL POLYMER 30% GLASS, FLAME RETARDANT ACC. UL 94-V0 COLOR NATURAL.
- THIS PRODUCT WITH "LF" SUFFIX MEETS EUROPEAN UNIDIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS -22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MINIMUM THICK CIRCUIT BOARD.

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		ELECTRONICS	
SEE NOTE				COPY		www.fciconnect.com	
ltr	ecn no	dr	date	linear	projection	title	
A	H00366	DAN	910122			S.T. Male Coax	
B	H10490	HBO	911203			12 mm Connectors	
C	H50173	RVI	950320	angles		product family	code
D	H90480	HME	990816	dr	D Andrews	900720	213
E	005-035	CLW	050927	eng	E Fejen	950320	1 of 1
				chr	A V Zanten	900720	
				app	H Coojmans	950320	
sheet	revision	E		scale	5:1		
index	sheet	1		size	A2		

PDM: Rev. E STATUS: Released

Printed: May 19, 2011

Tous droits réservés. Reproduction ou utilisation sans autorisation de FCI est formellement interdite.

All rights reserved. Reproduction or use without written authority from FCI is prohibited.