


# Data sheet

## chainflex® CFROBOT6

Motor cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Oil-resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

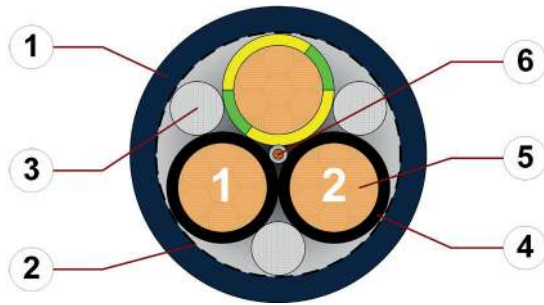

1. Outer jacket: Pressure extruded PUR mixture
2. Banding: Plastic fleece
3. Filling: Plastic yarns
4. Core insulation: Mechanically high-quality TPE mixture
5. Conductor: Stranded conductor in especially bending-resistant version consisting of bare copper wires
6. Strain relief: Tensile stress-resistant and torsion-resistant centre element



igus 36-month  
chainflex cable  
guarantee and  
service life  
calculator based  
on 2 billion test  
cycles per year



**Example image**  
For detailed overview please see design table

### Cable structure

<b>Conductor</b>	Stranded conductor in especially bending-resistant version consisting of bare copper wires (following DIN EN 60228).
<b>Core insulation</b>	Mechanically high-quality TPE mixture.
<b>Core identification</b>	Black cores with white numbers 1-2, one green-yellow core.
<b>Outer jacket</b>	Low-adhesion, halogen-free, highly abrasion resistant PUR mixture, adapted to suit the requirements in e-chains® (following DIN EN 50363-10-2) <b>Colour:</b> Steel-blue (similar to RAL 5011) <b>Printing:</b> white

\* **Length printing:** Not calibrated. Only intended as an orientation aid.  
① / ② Cable identification according to Part No. (see technical table).  
Example: chainflex **CFROBOT6.100.03 3G10 600/1000V**

Example image


# Data sheet

## chainflex® CFROBOT6

Motor cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Oil-resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

### Dynamic information

Bend radius	e-chain® twisted	min. 10 x d
	flexible	min. 8 x d
	fixed	min. 5 x d
Temperature	e-chain® twisted	-25 °C up to +80 °C
	flexible	-40 °C up to +80 °C (following DIN EN 60811-504)
	fixed	-50 °C up to +80 °C (following DIN EN 50305)
v max.	twisted	180 °/s
a max.	twisted	60 °/s <sup>2</sup>
Travel distance	Robots and 3D movements, Class 1	



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



These values are based on specific applications or tests. They do not represent the limit of what is technically feasible.

### Guaranteed service life according to guarantee conditions

Cycles	5 million	7.5 million	10 million
Temperature, from/to [°C]	Torsion max. [°/m]	Torsion max. [°/m]	Torsion max. [°/m]
-25/-15	±150	±90	±30
-15/+70	±180	±120	±60
+70/+80	±150	±90	±30

Minimum guaranteed service life of the cable under the specified conditions.  
The installation of the cable is recommended within the middle temperature range.

### Electrical information

Nominal voltage	600/1000 V (following DIN VDE 0298-3) 1000 V (following UL)
Testing voltage	4000 V (following DIN EN 50395)



Example image


# Data sheet

## chainflex® CFROBOT6

Motor cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Oil-resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant



### Properties and approvals

UV resistance	High
Oil resistance	Oil-resistant (following DIN EN 50363-10-2), Class 3
Flame retardant	According to IEC 60332-1-2, FT1, VW-1
Silicone-free	Free from silicone which can affect paint adhesion (following PV 3.10.7 – status 1992)
Halogen-free	Following DIN EN 60754
 <b>UL verified</b>	Certificate No. B129699: „igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year“
<b>UL/CSA AWM</b>	See table UL/CSA AWM for details
<b>NFPA</b>	Following NFPA 79-2018, chapter 12.9
<b>EAC</b>	Certificate No. RU C-DE.ME77.B.02324 (TR ZU)
<b>CTP</b>	Certificate No. C-DE.PB49.B.00420 (Fire protection)
<b>REACH</b>	In accordance with regulation (EC) No. 1907/2006 (REACH)
<b>Lead-free</b>	Following 2011/65/EC (RoHS-II/RoHS-III)
<b>Cleanroom</b>	According to ISO Class 1. The outer jacket material of this series complies with CF77. UL.05.12.D - tested by IPA according to standard DIN EN ISO 14644-1
<b>CE</b>	Following 2014/35/EU



igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year



### Properties and approvals

#### UL/CSA AWM Details

Conductor nominal cross section [mm <sup>2</sup> ]	Number of cores	UL style core insulation	UL style outer jacket	UL Voltage Rating [V]	UL Temperature Rating [°C]
10	3	10492	21223	1000	80
16	3	10492	21223	1000	80
25	3	10492	21223	1000	80

Example image


# Data sheet

## chainflex® CFROBOT6

Motor cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Oil-resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

### Typical lab test setup for this cable series


Test bend radius R	approx. 175 - 200 mm
Test travel S/S <sub>2</sub>	approx. 1 - 12 m
Test duration	minimum 1.5 - 3 million double strokes
Test speed	approx. 0.5 m/s
Test acceleration	approx. 1.5 m/s <sup>2</sup>

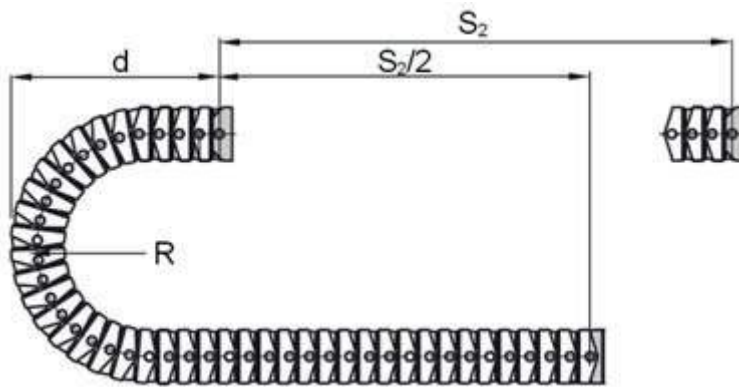

igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year

### Typical lab test setup (torsion) for this cable series

Torsion range T	±180°/m
Length 3D e-chain®	1 m
Test duration (torsion)	minimum 3 - 5 million cycles
Test speed (torsion)	approx. 80 - 120 °/s
Test acceleration (torsion)	approx. 40°/s <sup>2</sup>

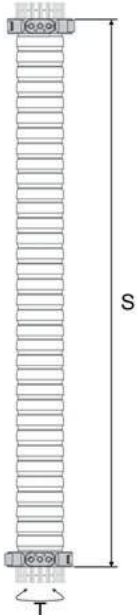

Example image

igus® chainflex® CFROBOT 6

# Data sheet

## chainflex® CFROBOT6

Motor cable (Class 6.1.3.3) ● For torsion applications ● PUR outer jacket ● Oil-resistant and coolant-resistant ● Flame retardant ● PVC and halogen-free ● Notch-resistant ● Hydrolysis and microbe-resistant

### Typical application areas

- For heaviest duty applications with torsion movements, Class 6
- Especially for robots and 3D movements, Class 1
- Almost unlimited resistance to oil, Class 3
- Torsion  $\pm 180^\circ$ , with 1m cable length, Class 3
- Indoor and outdoor applications, UV-resistant
- Robots, Handling, spindle drives

igus 36-month chainflex cable guarantee and service life calculator based on 2 billion test cycles per year

### Technical tables:

#### Mechanical information

Part No.	Number of cores and conductor nominal cross section [mm <sup>2</sup> ]	Outer diameter (d) max. [mm]	Copper index [kg/km]	Weight [kg/km]
CFROBOT6.100.03 <sup>1)</sup>	3G10	15.0	297	388
CFROBOT6.160.03 <sup>1)</sup>	3G16	18.0	475	578
CFROBOT6.250.03	3G25	22.0	737	896

<sup>1)</sup> Phase-out model

**Note:** The given outer diameters are maximum values and may tend toward lower tolerance limits.  
G = with green-yellow earth core x = without earth core

#### Electrical information

Conductor nominal cross section [mm <sup>2</sup> ]	Maximum conductor resistance at 20 °C (following DIN EN 50289-1-2) [Ω/km]	Maximum current rating at 30 °C [A]
10	2.1	74
16	1.3	99
25	0.85	131

The final maximum current rating depends among other things on the ambient conditions, the type of the installation and the number of loaded cores.



Example image