



PAGE 1/2	ISSUE 05-12-19R	SERIES <b>COUPLER</b>	PART NUMBER <b>R432634000</b>
----------	-----------------	--------------------------	-------------------------------

Scale 2 : 1

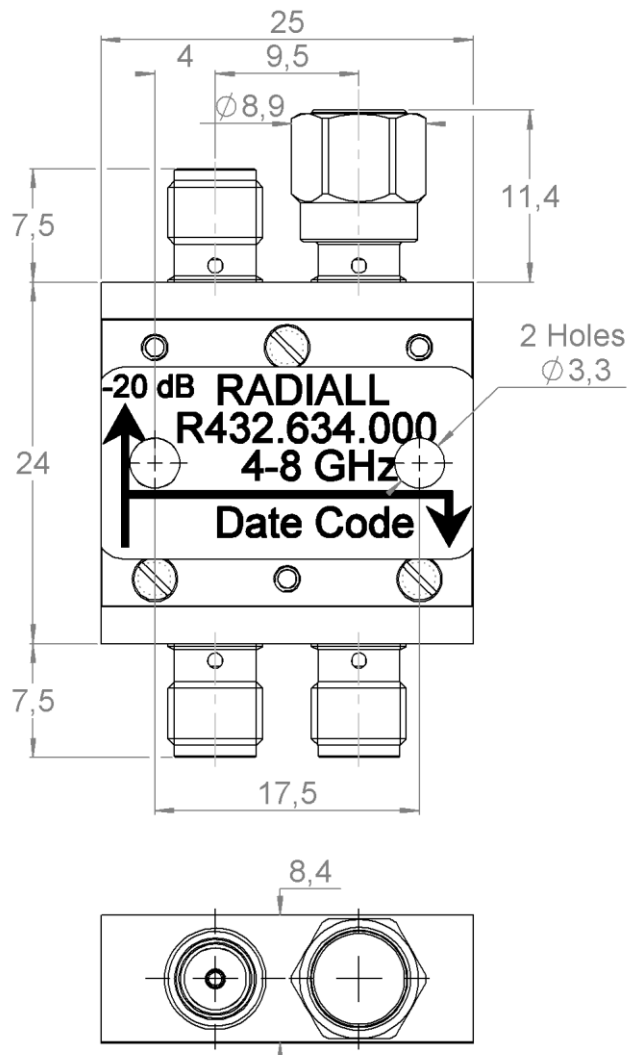

All dimensions are in mm. Tolerances according ISO 2768 m-H

Weight **19,4600** g  
Specification



PAGE 2/2	ISSUE <b>05-12-19R</b>	SERIES <b>COUPLER</b>	PART NUMBER <b>R432634000</b>
----------	------------------------	--------------------------	-------------------------------

### **ELECTRICAL CHARACTERISTICS**

Frequency operating range :	4 – 8 GHz
Impedance :	50 Ω
VSWR : - Main Line	1.20 max.
- Coupled Line	1.20 max.
Nominal Coupling :	20 dB
Coupling Precision :	± 0.3 dB
Insertion Loss :	0.4 dB max.
Directivity :	17 dB mini
Frequency Sensitivity :	± 0.8 dB
Average Power at 25°C	50W
Peak Power at 25°C	3000W

### **MECHANICAL CHARACTERISTICS**

Connector type :	SMA female per MIL-C 39012
Coaxial Termination :	SMA, 50 Ω, 1W

### **ENVIRONMENTAL CHARACTERISTICS**

Operating temperature :	-25°C / +70°C
Storage temperature :	-25°C / +70°C