



Figure similar

Mechanically held lighting contactor, Contactor amp rating 20A, 0 N.C. / 12 N.O. poles, Non-combination type, Encl NEMA type 4X 304 S-Steel, Water/dust tight noncorrosive

|  |  |
|--|--|
| product brand name   | Class CLM  |
| design of the product  | Mechanically held lighting contactor   |
| special product feature  | Energy efficient; Quiet operation  |
| <b>General technical data</b>  |  |
| weight [lb]  | 9 lb   |
| Height x Width x Depth [in]  | 16 × 13 × 6 in   |
| touch protection against electrical shock  | NA for enclosed products   |
| installation altitude [ft] at height above sea level maximum   | 6560 ft  |
| country of origin  | USA  |
| <b>Contactors</b>  |  |
| size of contactor  | 20 Amp   |
| number of NO contacts for main contacts  | 12   |
| number of NC contacts for main contacts  | 0  |
| operating voltage for main current circuit at AC at 60 Hz maximum  | 600 V  |
| contact rating of the main contacts of lighting contactor  |  |
| <ul style="list-style-type: none"> <li>• at tungsten (1 pole per 1 phase) rated value</li> <li>• at tungsten (2 poles per 1 phase) rated value</li> <li>• at tungsten (3 poles per 3 phases) rated value</li> <li>• at ballast (1 pole per 1 phase) rated value</li> <li>• at ballast (2 poles per 1 phase) rated value</li> <li>• at ballast (3 poles per 3 phases) rated value</li> <li>• at resistive load (1 pole per 1 phase) rated value</li> <li>• at resistive load (2 poles per 1 phase) rated value</li> <li>• at resistive load (3 poles per 3 phases) rated value</li> </ul> | 20A @250V 1p 1ph<br>20A @250V 2p 1ph<br>20A @250V 3p 3ph<br>20A @347V 1p 1ph<br>20A @600V 2p 1ph<br>20A @600V 3p 3ph<br>30A @347V 1p 1ph<br>30A @600V 2p 1ph<br>30A @600V 3p 3ph |
| <b>Auxiliary contact</b>   |  |
| number of NC contacts for auxiliary contacts   | 0  |
| number of NO contacts for auxiliary contacts   | 0  |
| number of total auxiliary contacts maximum   | 4  |
| contact rating of auxiliary contacts of contactor according to UL  | NA   |
| <b>Coil</b>  |  |
| type of voltage of the control supply voltage  | AC   |
| control supply voltage   |  |
| <ul style="list-style-type: none"> <li>• at AC at 50 Hz rated value</li> <li>• at AC at 60 Hz rated value</li> </ul>   | 110 ... 120 V<br>110 ... 120 V   |
| apparent pick-up power of magnet coil at AC  | 600 VA   |
| apparent holding power of magnet coil at AC  | 6 VA   |
| operating range factor control supply voltage rated value  | 0.85 ... 1.1   |

|   |  |
|---|--|
| of magnet coil  |  |
| <b>Enclosure</b>  |  |
| degree of protection NEMA rating of the enclosure   | NEMA 4x 304 stainless steel enclosure          |
| design of the housing   | dustproof, waterproof & resistant to corrosion |
| <b>Mounting/wiring</b>  |  |
| mounting position   | Vertical                                       |
| fastening method  | Surface mounting and installation              |
| type of electrical connection for supply voltage line-side  | Screw-type terminals                           |
| tightening torque [lbf-in] for supply   | 18 ... 18 lbf-in                               |
| type of connectable conductor cross-sections at line-side at AWG cables single or multi-stranded                  | 2x (18 ... 10 AWG)                             |
| temperature of the conductor for supply maximum permissible   | 75 °C  |
| material of the conductor for supply  | CU   |
| type of electrical connection for load-side outgoing feeder   | Screw-type terminals                           |
| tightening torque [lbf-in] for load-side outgoing feeder  | 18 ... 18 lbf-in                               |
| type of connectable conductor cross-sections at AWG cables for load-side outgoing feeder single or multi-stranded | 2x (18 ... 10 AWG)                             |
| temperature of the conductor for load-side outgoing feeder maximum permissible                                    | 75 °C  |
| material of the conductor for load-side outgoing feeder   | CU   |
| type of electrical connection of magnet coil  | Screw-type terminals                           |
| tightening torque [lbf-in] at magnet coil   | 18 ... 18 lbf-in                               |
| type of connectable conductor cross-sections of magnet coil at AWG cables single or multi-stranded                | 2x (18 ... 10 AWG)                             |
| temperature of the conductor at magnet coil maximum permissible   | 75 °C  |
| material of the conductor at magnet coil  | CU   |
| <b>Short-circuit current rating</b>   |  |
| design of the fuse link for short-circuit protection of the main circuit required                                 | none   |
| design of the short-circuit trip  | Thermal magnetic circuit breaker               |
| breaking capacity maximum short-circuit current (Icu)   |  |
| • at 240 V  | 5 kA   |
| • at 480 V  | 5 kA   |
| • at 600 V  | 5 kA   |
| certificate of suitability  | NEMA ICS 2; UL 508; CSA 22.2, No. 14           |

#### Further information

**Industrial Controls - Product Overview (Catalogs, Brochures,...)**

[www.usa.siemens.com/iccatalog](http://www.usa.siemens.com/iccatalog)

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/us/Catalog/product?mlfb=US2:CLMSB12120>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<https://support.industry.siemens.com/cs/US/en/ps/US2:CLMSB12120>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=US2:CLMSB12120&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=US2:CLMSB12120&lang=en)

**Certificates/approvals**

<https://support.industry.siemens.com/cs/US/en/ps/US2:CLMSB12120/certificate>

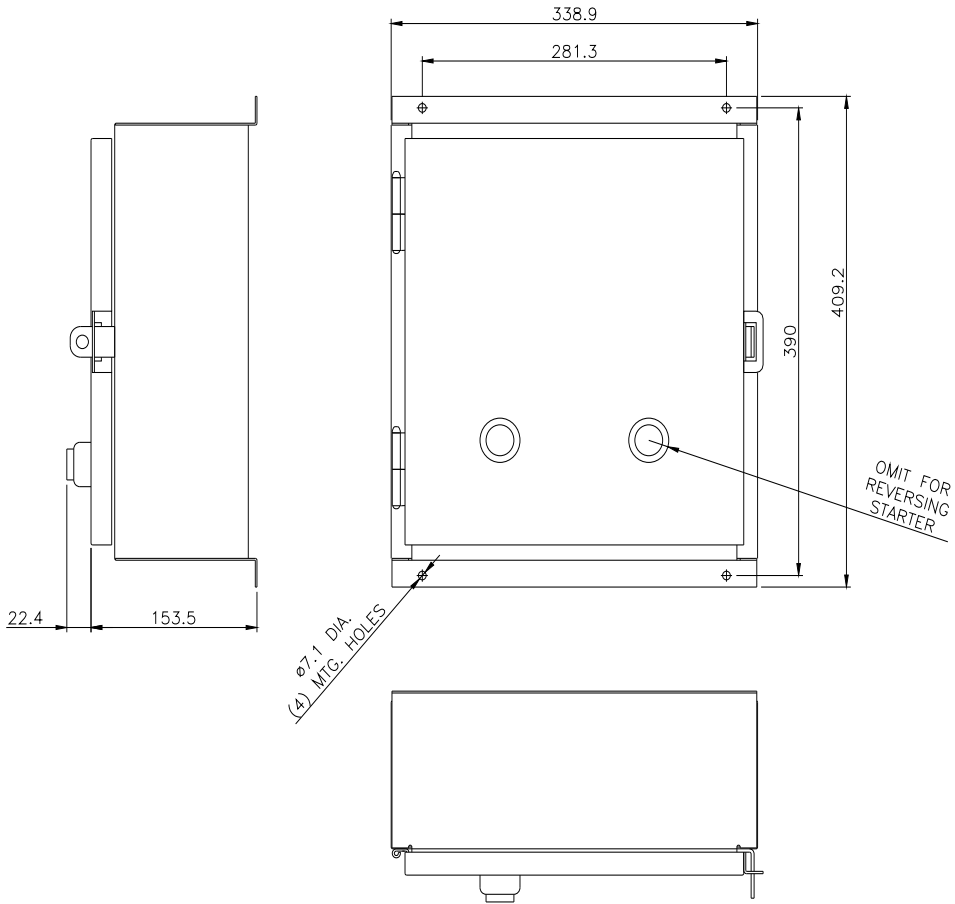

last modified:

1/25/2022 