

MIRELLA-G2-W

~35° wide beam. Compatible with LEDiL HEKLA.

SPECIFICATION:

Ø 49.9 mm **Dimensions** Height 22.6 mm socket Fastening **ROHS** compliant yes 🕕



MATERIALS:

Component **Type** Material MIRELLA-G2-W Reflector PC

Colour **Finish** Coating metal

ORDERING INFORMATION:


Component

F15560_MIRELLA-G2-W

» Box size: 480 x 280 x 300 mm

Qty in box MOQ MPQ Box weight (kg) 336 28 3.3


PRODUCT DATASHEET F15560_MIRELLA-G2-W

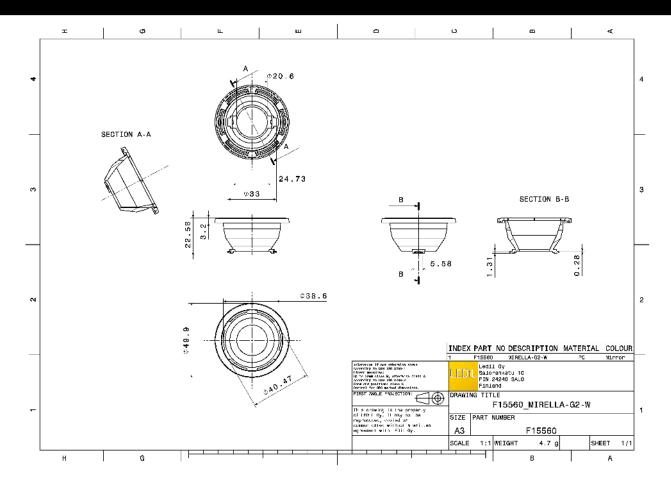

See also our general installation guide: www.ledil.com/installation_guide


Published: 11/07/2019



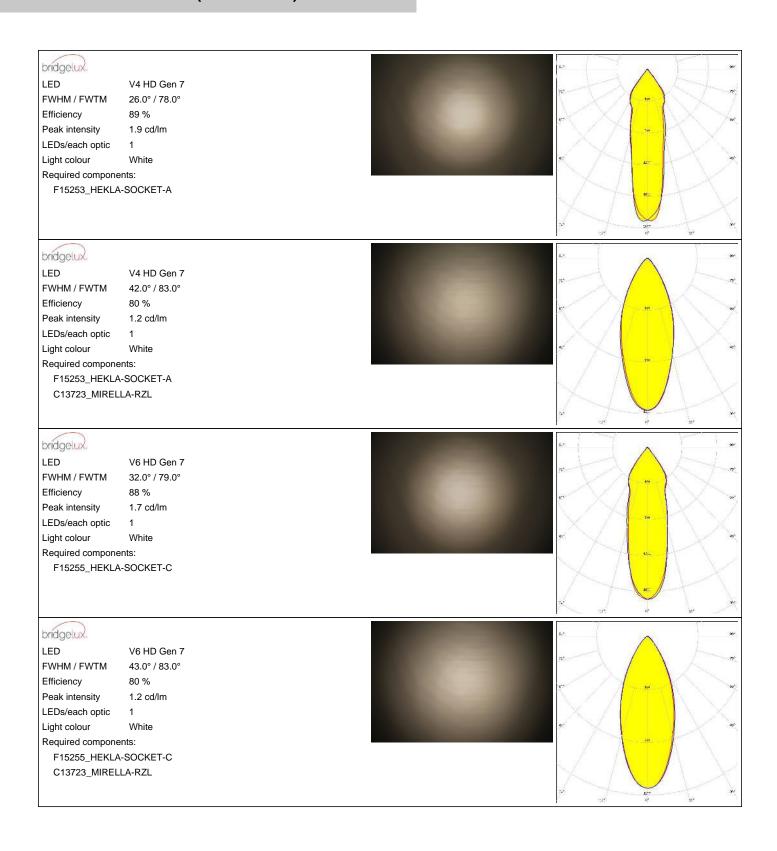


3/26



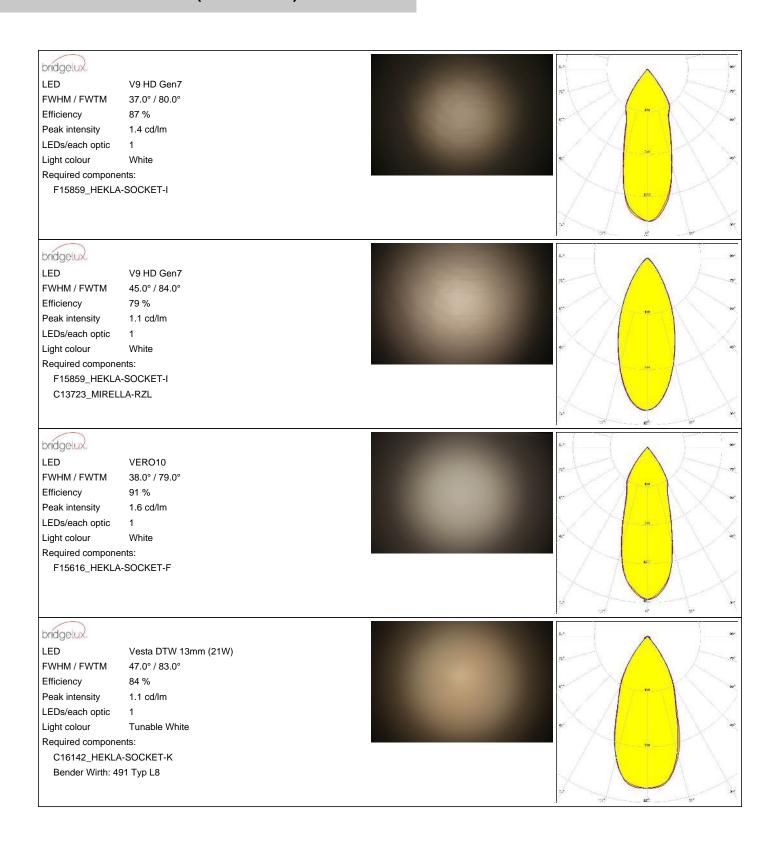




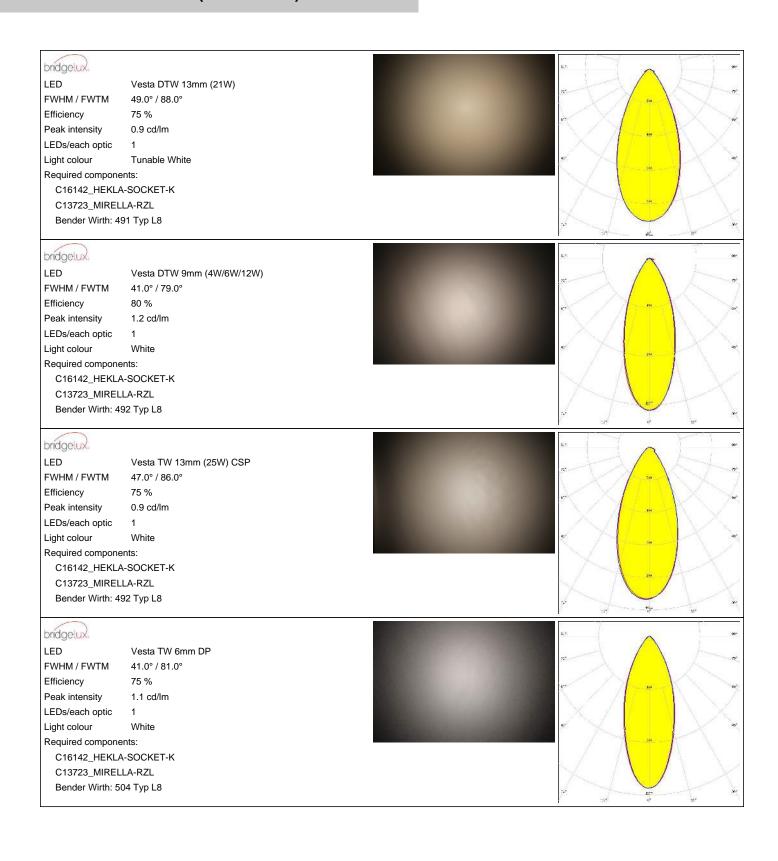


5/26



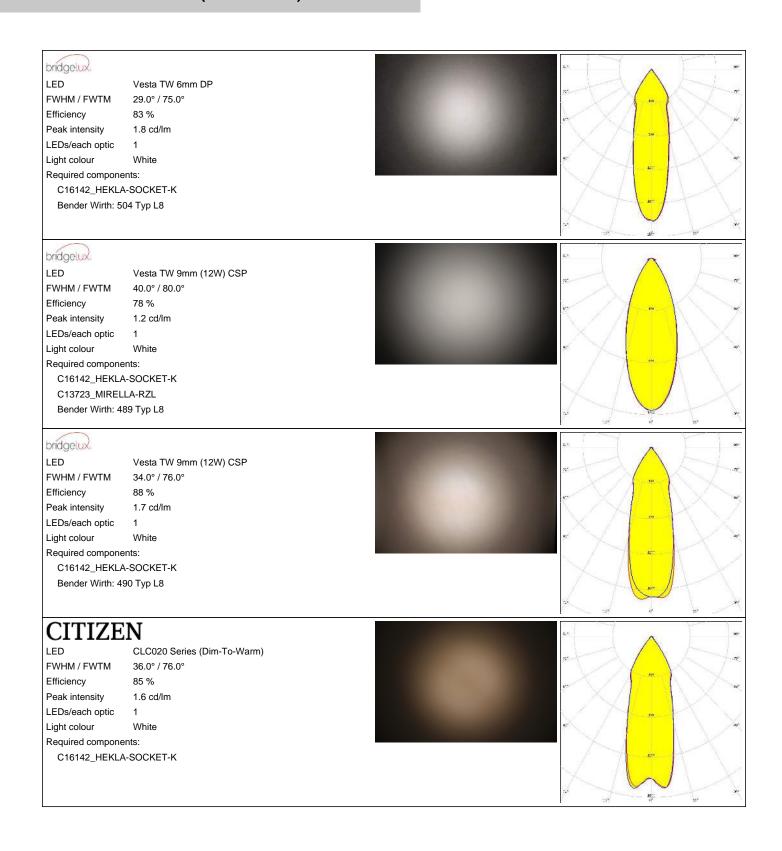




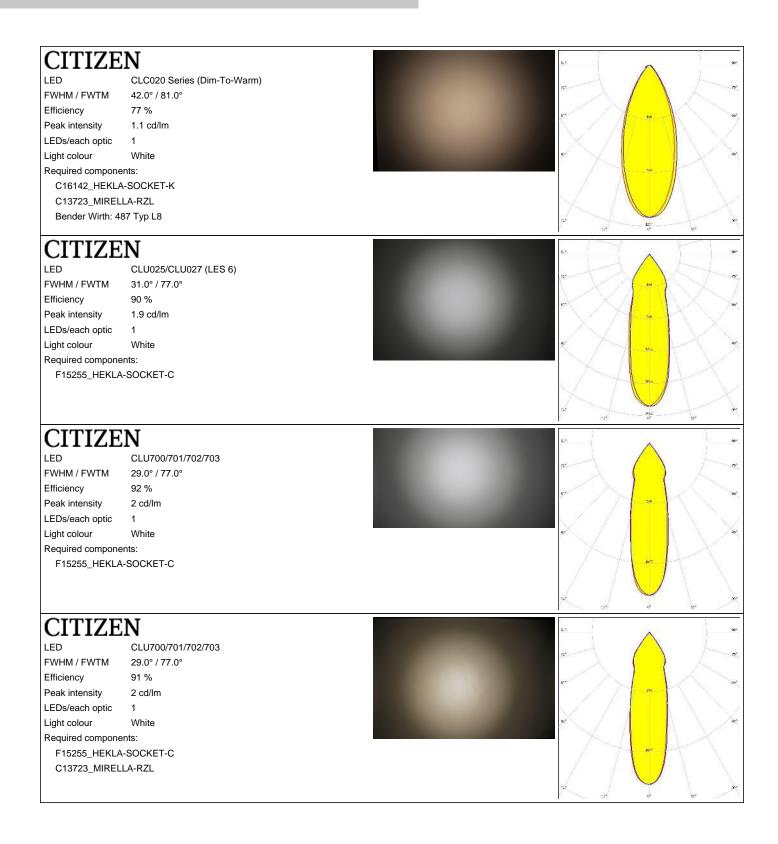


Published: 11/07/2019




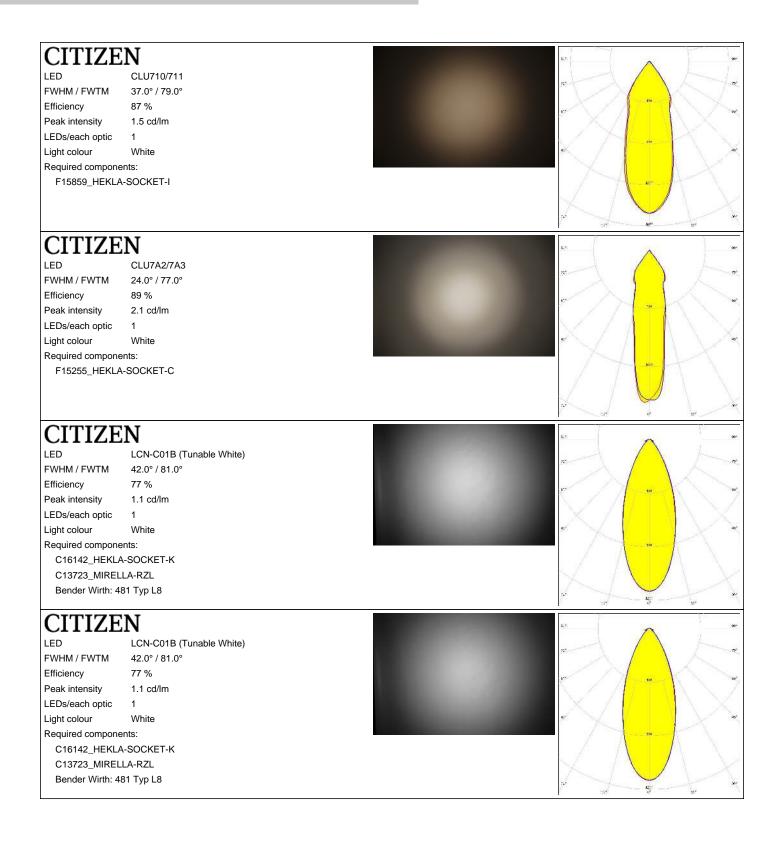




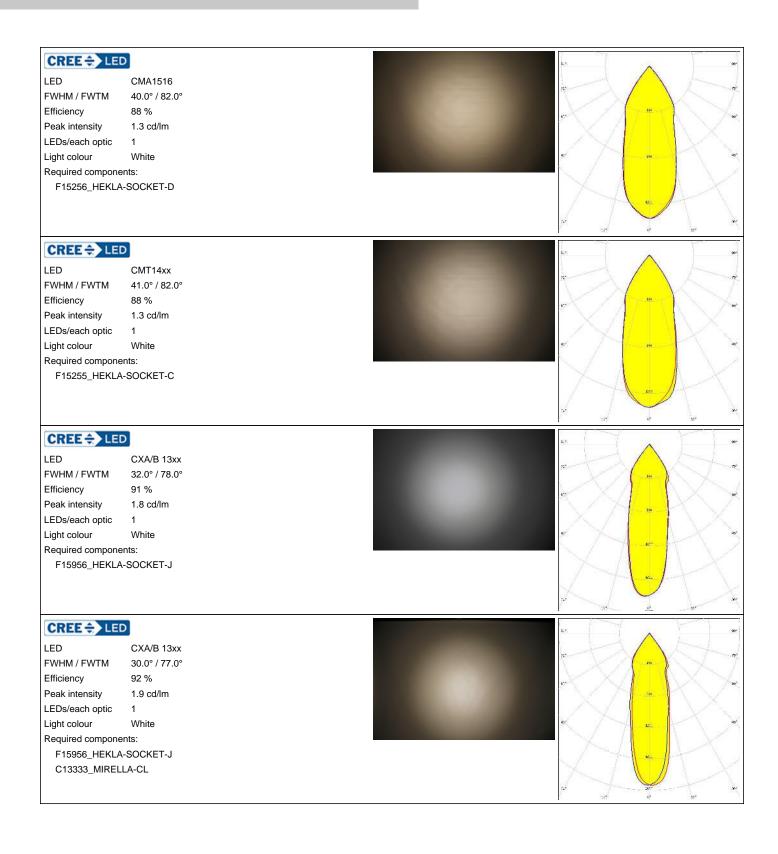




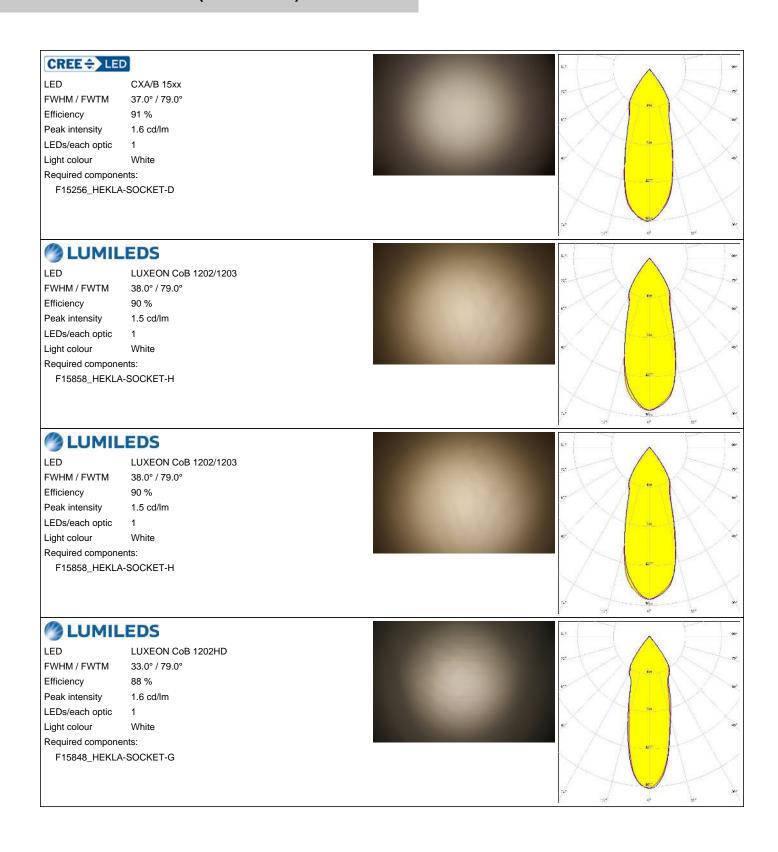




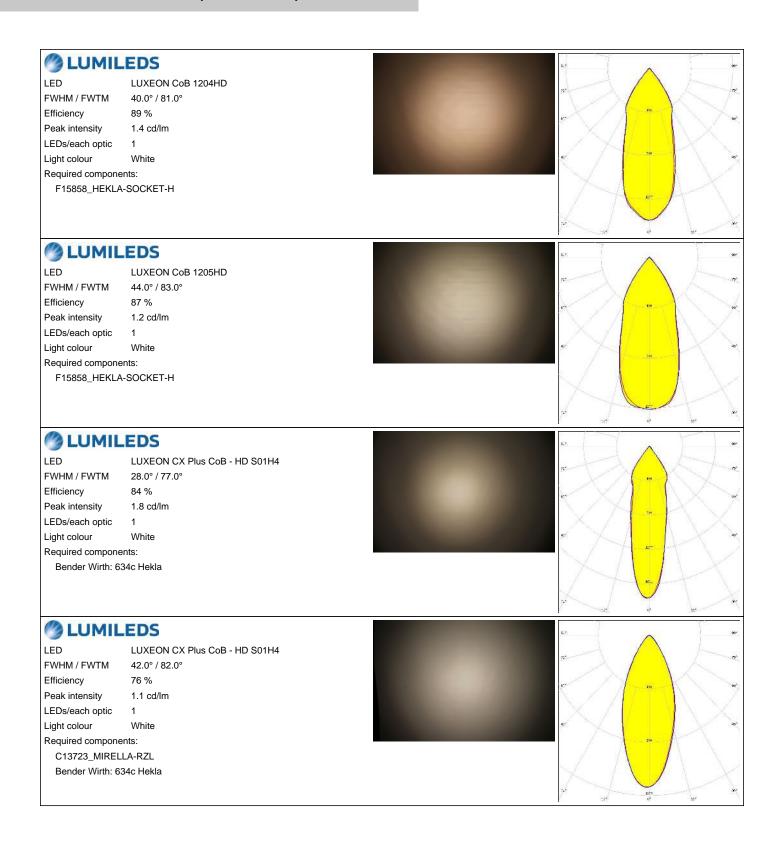




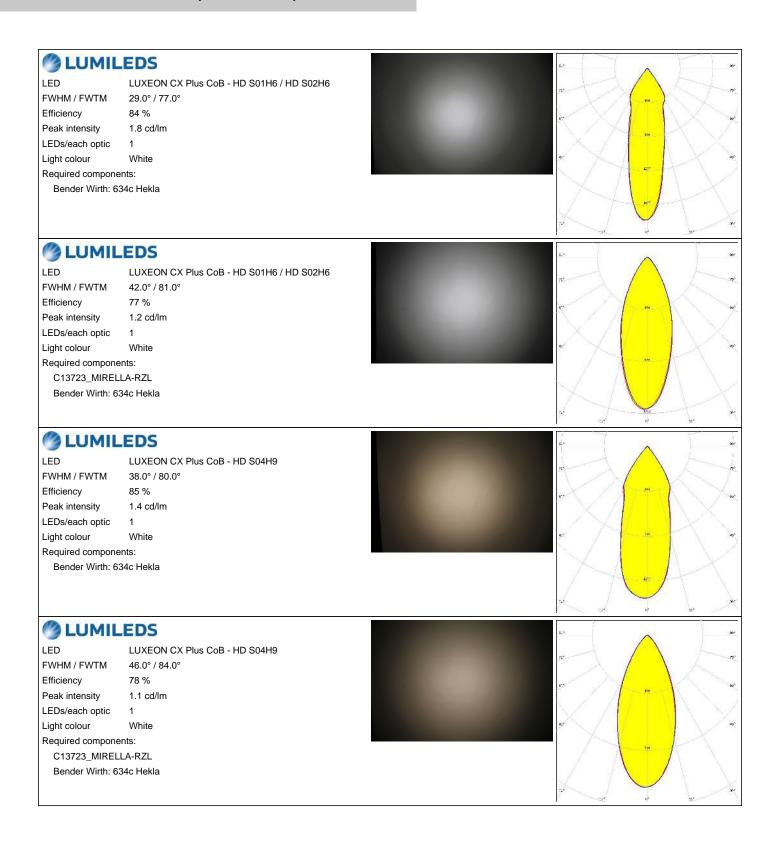




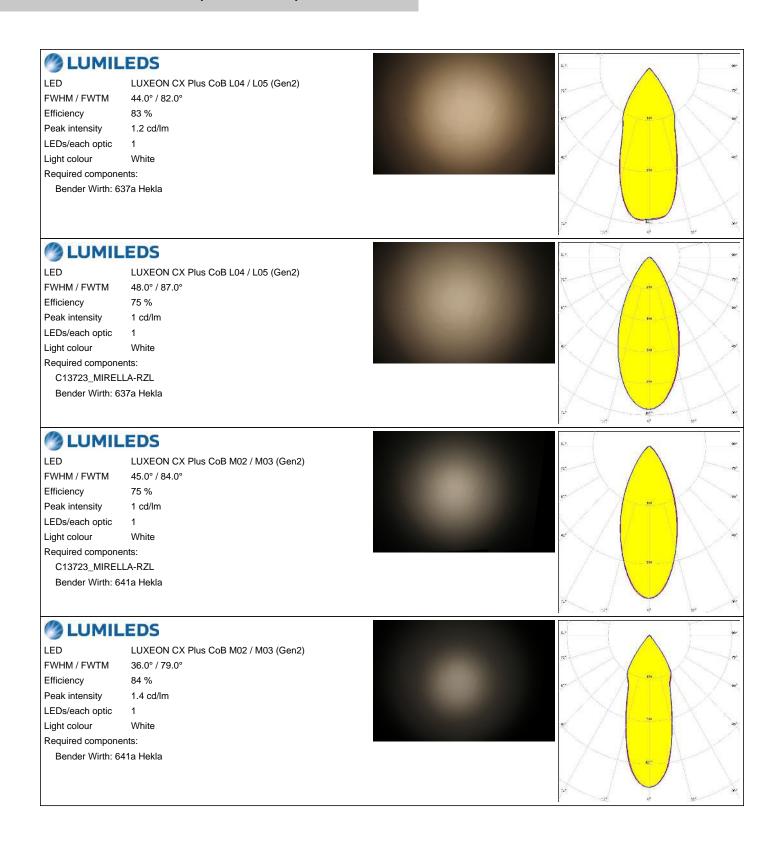




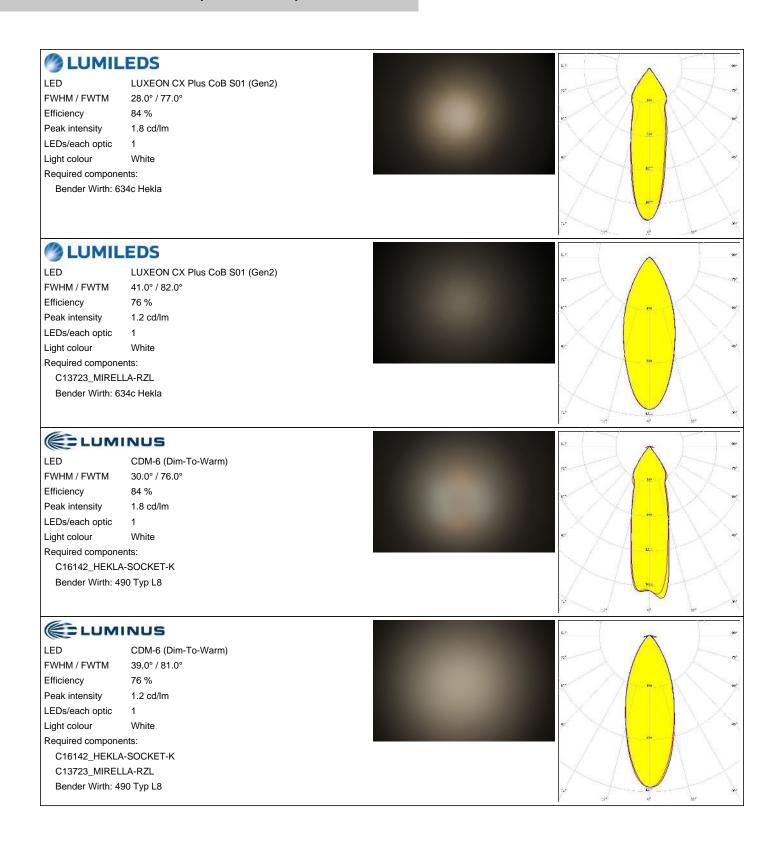




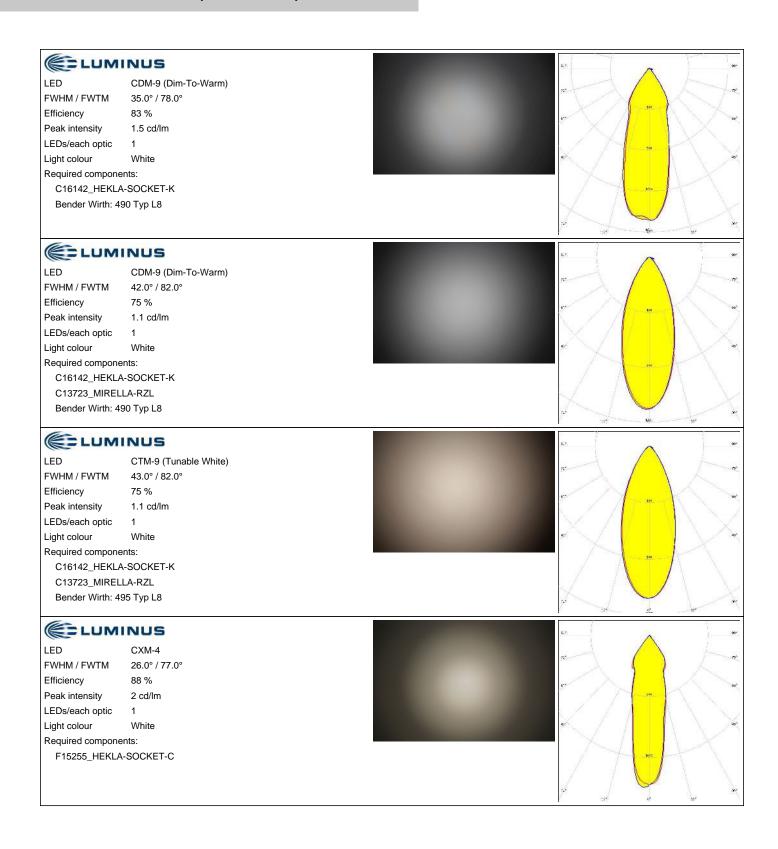



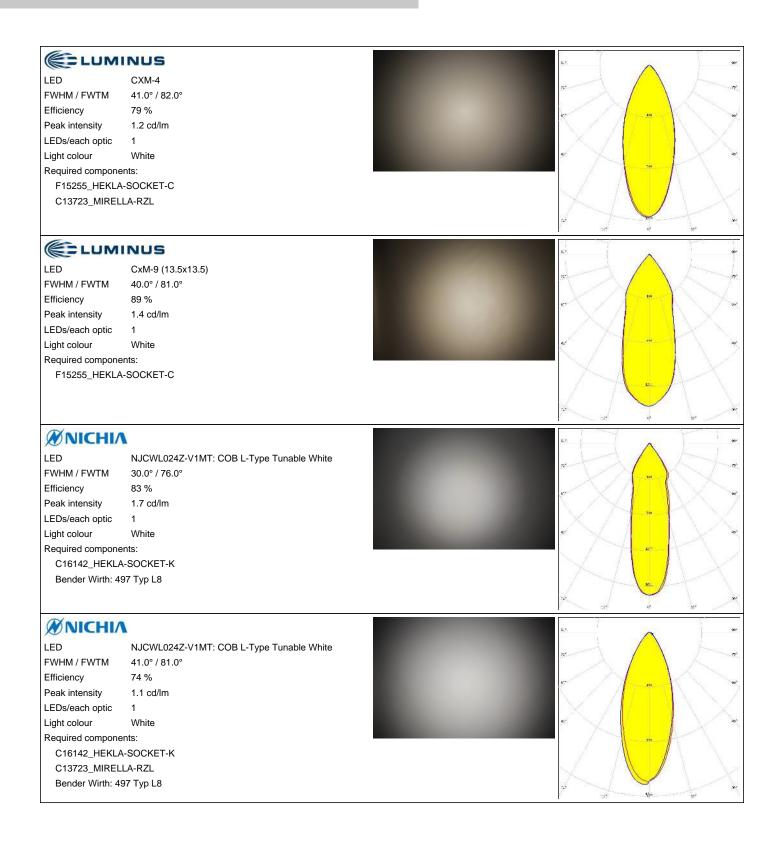



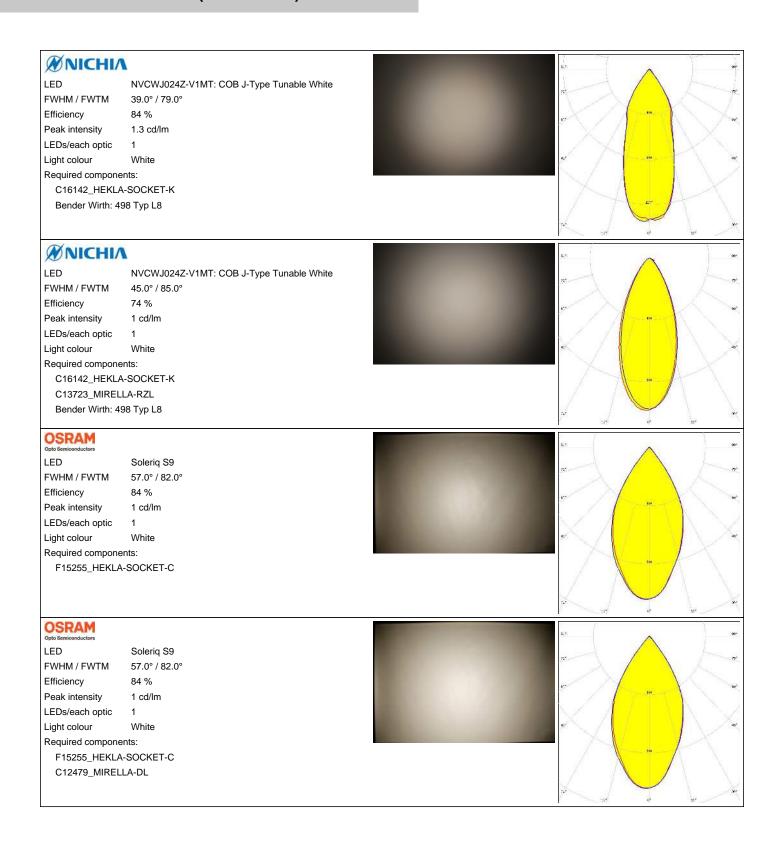




PHILIPS

LED Fortimo SLM L09 CoB

FWHM / FWTM 39.0° / 81.0°
Efficiency 88 %
Peak intensity 1.4 cd/lm
LEDs/each optic 1
Light colour White

F15858_HEKLA-SOCKET-H





PHILIPS

Required components:

LED Fortimo SLM L09 CoB

FWHM / FWTM 46.0° / 85.0°

Efficiency 79 %


Peak intensity 1.1 cd/lm

LEDs/each optic 1

Light colour White

Required components:

F15858_HEKLA-SOCKET-H C13723_MIRELLA-RZL

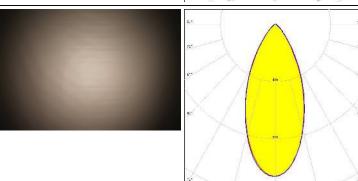

PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 49.0° / 87.0° Efficiency 77 % Peak intensity 0.9 cd/lm LEDs/each optic 1

Light colour White
Required components:
C16142_HEKLA-SOCKET-

C16142_HEKLA-SOCKET-K C13723_MIRELLA-RZL Bender Wirth: 432 Typ L8




PHILIPS

Required components:

LED Fortimo SLM L13 CoB

FWHM / FWTM 47.0° / 82.0°
Efficiency 83 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White

C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8

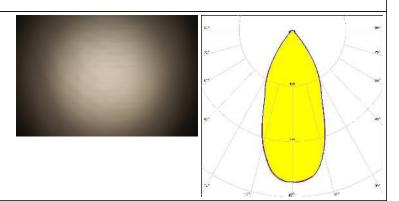

Published: 11/07/2019



PHILIPS

LED Fortimo SLM L13 CoB

FWHM / FWTM 47.0° / 83.0°
Efficiency 83 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White

C16142_HEKLA-SOCKET-K Bender Wirth: 432 Typ L8



PHILIPS

Required components:

Required components:

LED Fortimo SLM L13 CoB

FWHM / FWTM 49.0° / 86.0°


Efficiency 77 %

Peak intensity 0.9 cd/lm

LEDs/each optic 1

Light colour White

C16142_HEKLA-SOCKET-K C13723_MIRELLA-RZL Bender Wirth: 432 Typ L8

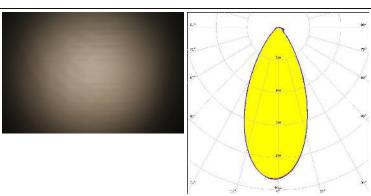


SAMSUNG

LED LC010C G2
FWHM / FWTM 29.0° / 78.0°
Efficiency 88 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour White

F15255_HEKLA-SOCKET-C

Required components:

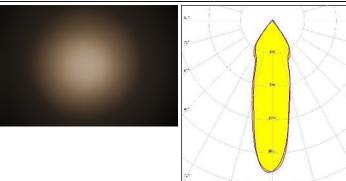

SAMSUNG

LED LC010T (Tunable White)

FWHM / FWTM 37.0° / 75.0°


Efficiency 79 %

Peak intensity 1.3 cd/lm

LEDs/each optic 1

Light colour Tunable White

Required components:
C16142_HEKLA-SOCKET-K
C14658_BARBARA-RZ-LENS
Bender Wirth: 501 Typ L8

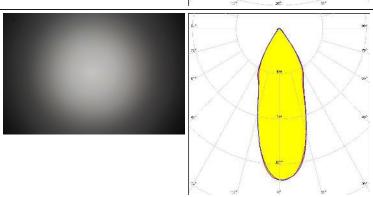

Published: 11/07/2019



SAMSUNG


LC010T (Tunable White)

FWHM / FWTM 36.0° / 77.0° Efficiency 84 % Peak intensity 1.4 cd/lm LEDs/each optic

Light colour Tunable White

Required components:


C16142_HEKLA-SOCKET-K Bender Wirth: 501 Typ L8

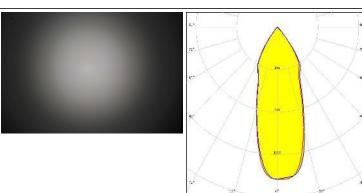

LED LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 52.0° / 85.0° Efficiency 87 % Peak intensity 1.1 cd/lm LEDs/each optic 1 White Light colour Required components:

F15859_HEKLA-SOCKET-I

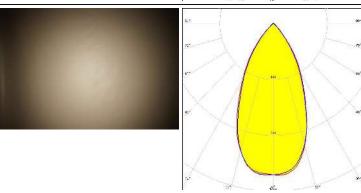


SAMSUNG

LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 53.0° / 87.0° Efficiency 79 % Peak intensity 0.9 cd/lm LEDs/each optic Light colour White Required components:

F15859_HEKLA-SOCKET-I C12479_MIRELLA-DL

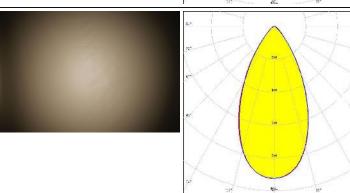


SAMSUNG


LC016D / LC019D / LC026D / LC033D

FWHM / FWTM 53.0° / 83.0° Efficiency 82 % Peak intensity 1 cd/lm LEDs/each optic White Light colour Required components:


F15859_HEKLA-SOCKET-I C13333_MIRELLA-CL

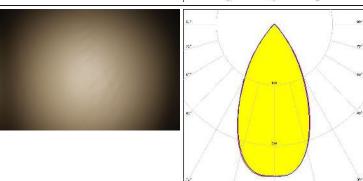




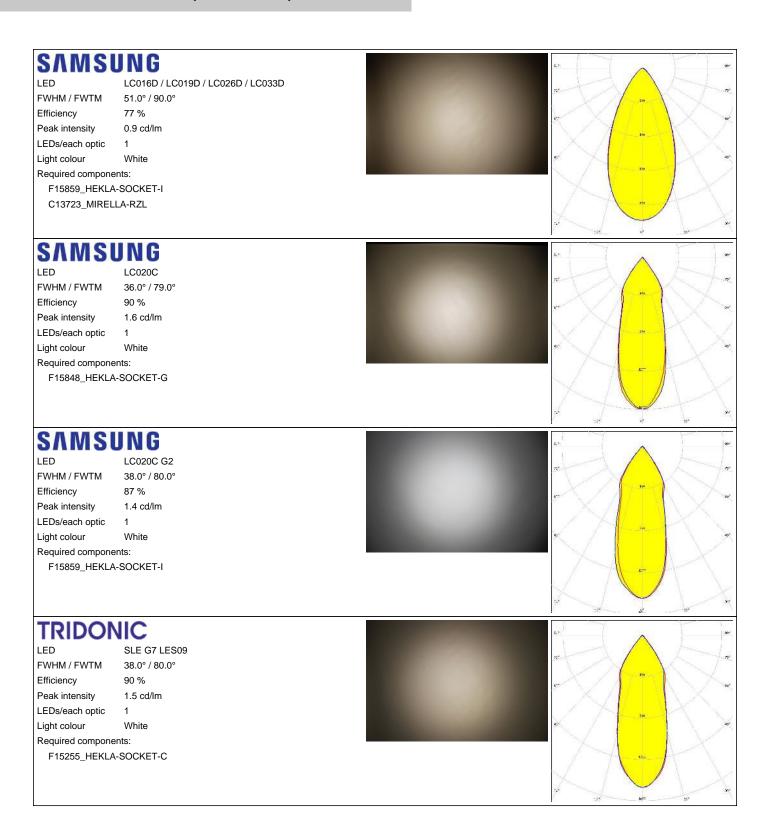




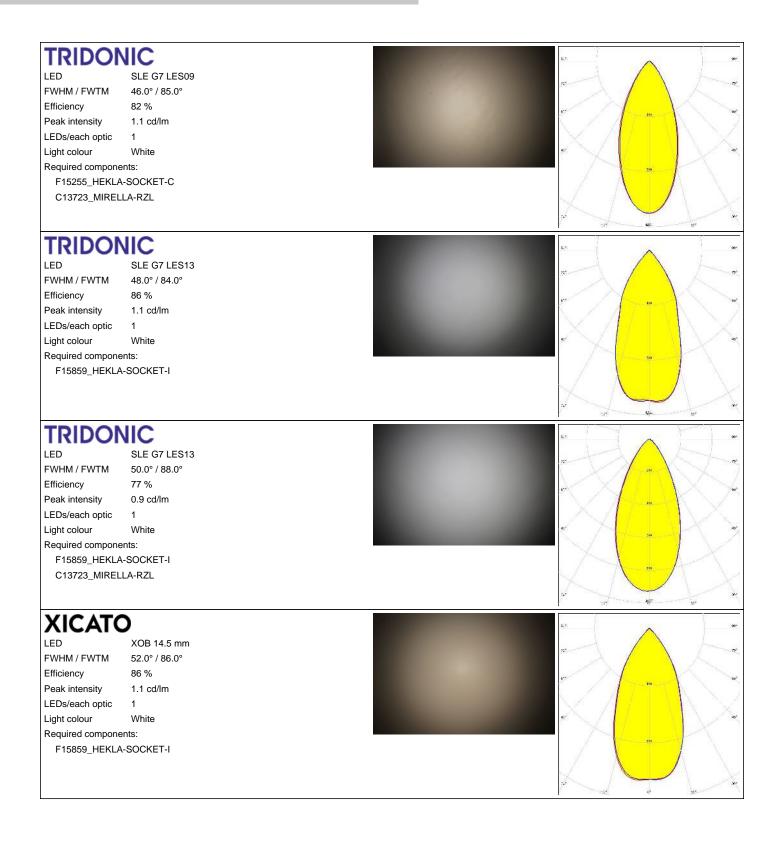



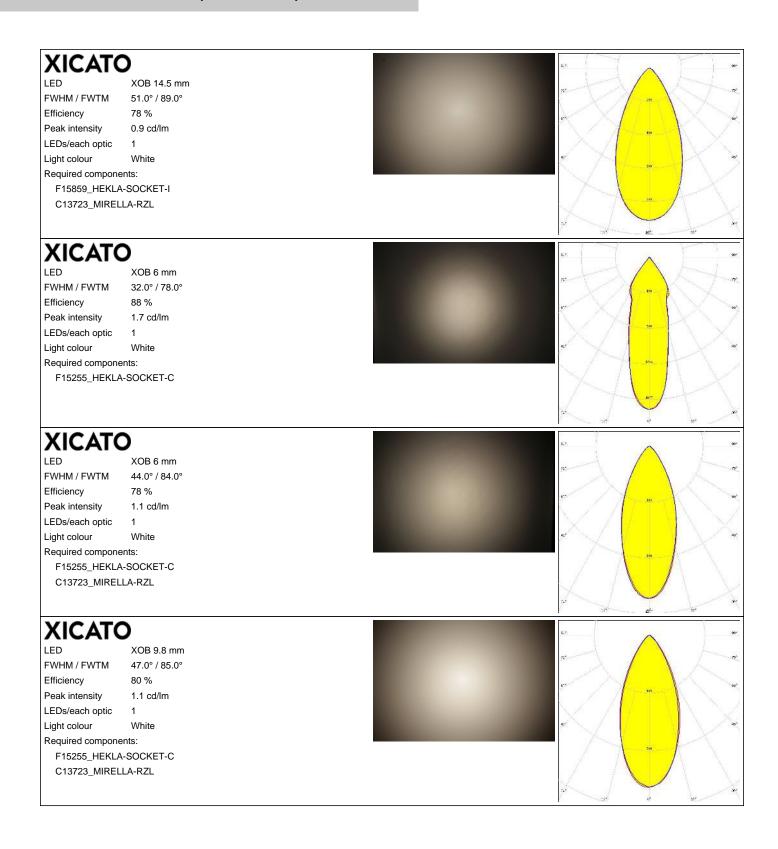



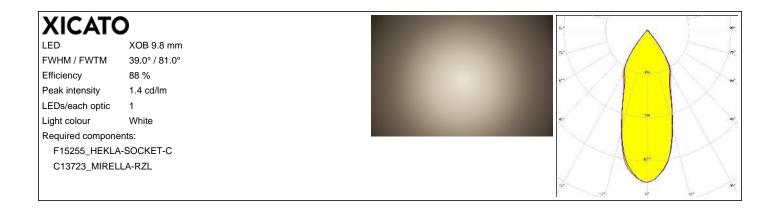



OPTICAL RESULTS (SIMULATED):

bridgelux

LED VERO13

FWHM / FWTM 39.0° / 75.0°


Efficiency 87 %

Peak intensity 1.5 cd/lm

LEDs/each optic 1
Light colour White

Light colour
Required components:

C16142_HEKLA-SOCKET-K



CITIZEN

LED CLL02x/CLU02x (LES10)

FWHM / FWTM 37.2° / 76.7°


Efficiency 88 %
Peak intensity 1.7 cd/lm

LEDs/each optic 1

Light colour White

Required components:

F15255_HEKLA-SOCKET-C



WNICHIA

LED COB L-Type (LES 11)

FWHM / FWTM 42.0° / 78.0°

Efficiency 90 %


Peak intensity 1.5 cd/lm

LEDs/each optic 1

Light colour White

Required components:

F15858_HEKLA-SOCKET-H



WNICHIA

LED COB T-Type

FWHM / FWTM 30.0° / 75.0°

Efficiency 88 %
Peak intensity 2 cd/lm

LEDs/each optic 1
Light colour White

Required components: F15848_HEKLA-SOCKET-G

Published: 11/07/2019



PRODUCT DATASHEET F15560_MIRELLA-G2-W

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDIL Oy

Joensuunkatu 13 FI-24240 SALO Finland

LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

Local sales and technical support

www.ledil.com/ where_to_buy

Shipping locations

Salo, Finland Hong Kong, China

Distribution Partners

www.ledil.com/ where_to_buy