
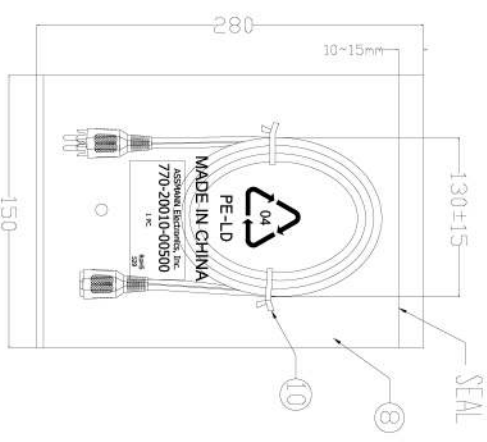
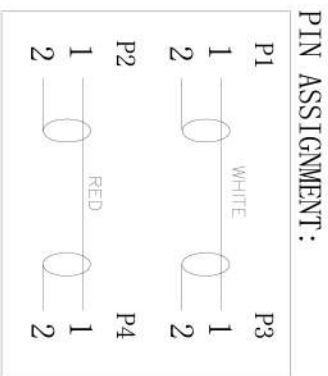


Units:mm

5000±50mm

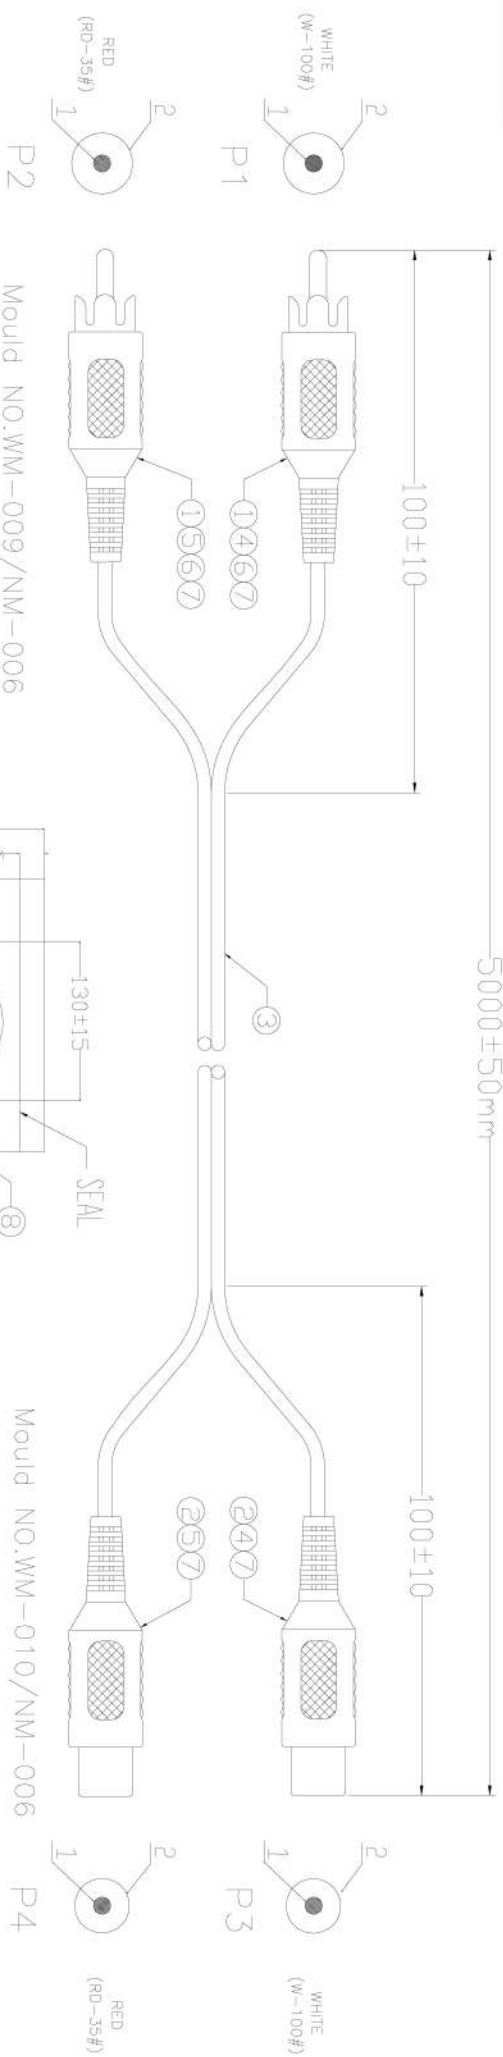

Electrical test:
 1. 100% short, open, mixture test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 5Mohm(min)
 4. dielectric test: DC 300V

NOTE:
 1. 小PE袋入PE袋对应料号, 包袋数量及时间印刷样式:
 Assignment Electronics, Inc.
 Industrial Cable and Connector Technology
 770-20010-00500
 5 PCS -
 S29 -
 ROHS
 印刷人/产线料号
 印袋的袋数
 印袋的袋数
 表示S29袋09年(袋每袋产品在生产日期)

⑩	TIE	2	BLACK L=80mm
⑨	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+"5PCS"
⑧	PE BAG	1	CLEAR SIZE: 150*280*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑦	TUBE	4	HEAT SHRINK TUBE BLACK OD1.5*10mm
⑥	IN JACKET	3.2g	CLEAR LD-PE(Mould NO. NM-006)
⑤	OUT JACKET	6.6g	PVC-40P RED(RD-35)
④	OUT JACKET	6.6g	PVC-40P WHITE(W-100)
③	CABLE	1	NOUL (10/0.10+28/0.10)2F JACKET BLACK OD2.8*5.6mm
②	CONN	2	RCA PLUG FEMALE NI-PLATED INSULATOR COLOR: BROWN
①	CONN	2	RCA PLUG MALE BLOSSOM TYPE NI-PLATED INSULATOR COLOR: BROWN
NO.	NAME	QTY	SPECIFICATION

CNC Tech, LLC
 Industrial Cable and Connector Technology

DRAWN BY	LICHENG	DRAWING NO.	V6/LJ08-094-081-E
CHECKED BY		CUSTOMER	CNC
APPROVAL BY		ITEM NO.	770-20010-00500
DECIDE BY		DATE	2012-12-28
VERSIONS/EDITEON	A/0	PROJECTION	