
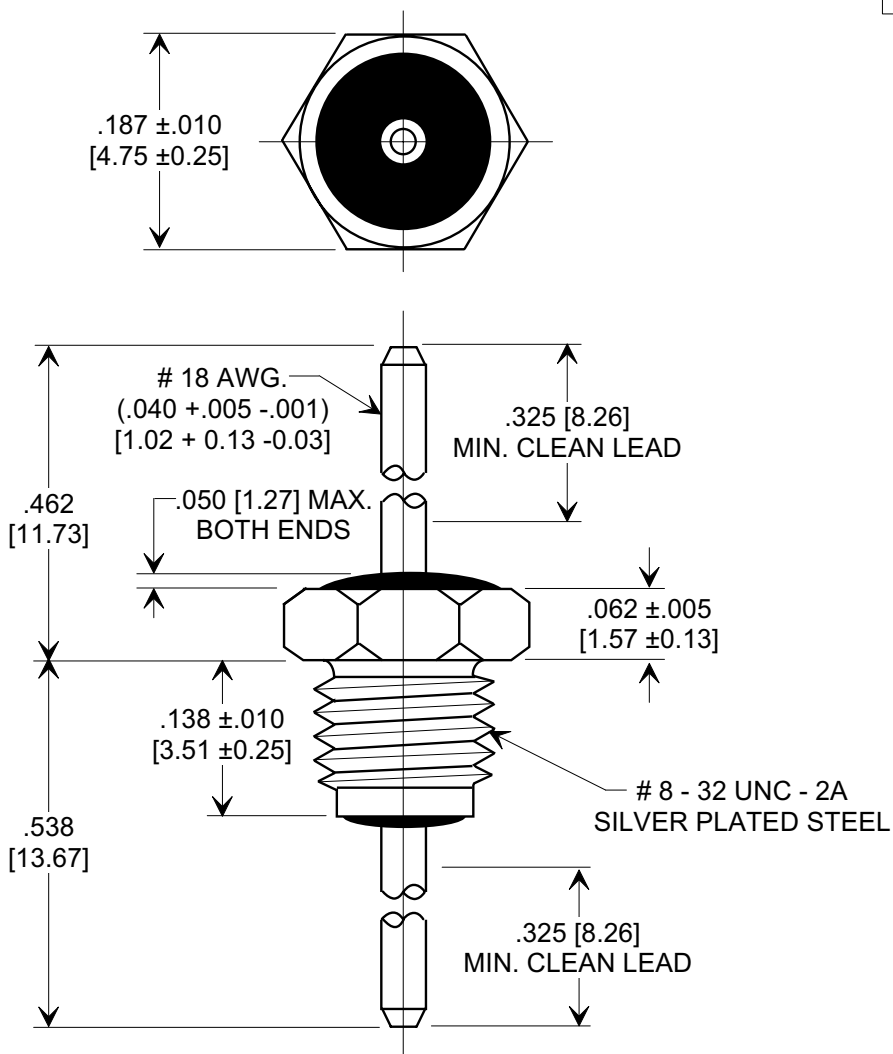



MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



NOTE:
 LEAD TO BE PHOSPHOR BRONZE 1/2 HARD
 TEMPER GOLD PLATED PER TUSONIX PPS 0014 CLASS D.

130 65	200	100	15	----	3	16	45
CAP. (pF)	85° C	125° C	CURRENT I _{dc}	10 MHz	100 MHz	1 GHz	10 GHz
	WORKING VOLTAGE (VVdc)			MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220			

X-2015 Rev-0 REVISION RECORD Original Release C.O. WAS SK 7867-003. SM 04-05-01 20010329-2-10 0	--TOLERANCES-- Unless Otherwise Specified		Title BUSHING STYLE EMI FILTER	
	DECIMAL ± .031 [0.79]		Drawn S.M. 03-19-01 Scale 6 X	
	ANGLES ±		Approved T.C. 03-19-01	
	TUSONIX TUCSON, ARIZONA		A	4205-058