



specifications

Consumption	Voltage	CRI	Lens	Heat Sink	L70 Hours	Surge Protection	Ambient Temp (F)	Power Factor	UL Listing	THC	Beam Angle	Enclosed Fixture Rated
36 W	100 - 277 V ⚡	> 80	clear polycarbonate	aluminum	50,000	4 KV built-in	-40° - 113°	> 0.9	damp location	< 20%	omni-directional	yes

select your lamp

Part Number	Color Temp	Base	Lumen Output	Efficacy
GI-CC-360D175-UL4	4000K	EX39	5,400	155 lm / W
GI-CC-360C175-UL4	5000K	EX39	5,400	155 lm / W
GI-CC-D175-E26UL4	4000K	E26	5,400	155 lm / W
GI-CC-C175-E26UL4	5000K	E26	5,400	155 lm / W



other


Dimensions	Warranty	Gross Weight	Case QTY
8.79" (L) x 2.36" (D)	6 years	1.65 lbs	12 pcs




Features

- > 6 Year warranty
- > 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- > Shatterproof



Luminous Intensity Distribution

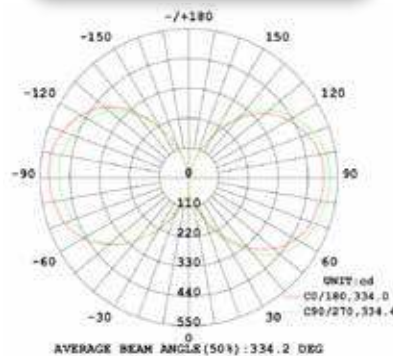

Distance vs Illumination



Isolux Diagram

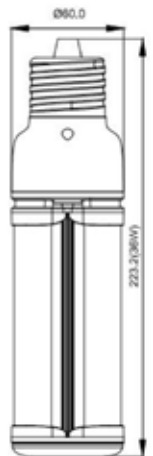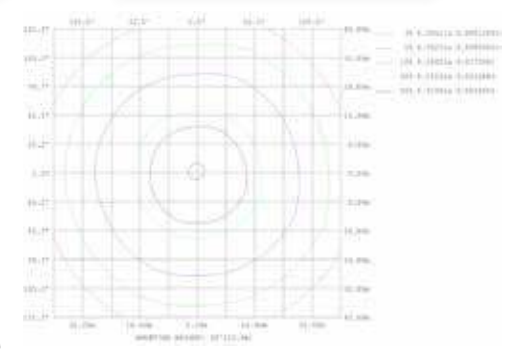

Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.

