

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91 929

SWITCH - BASIC

CATALOG LISTING

V3L-3053

CQ-X1864

CATALOG LISTING
V3L-3053
PAGE 1 OF 1
ISSUE
2



REPLACES X100985-V3L
RELEASE NO. PR-22260

REVISIONS
A 0005105
KSR
APR 04

CHECK
27 APR 04
AK

CHECK
28 JUN 96
DCS

DDM/CAD
DRAWN

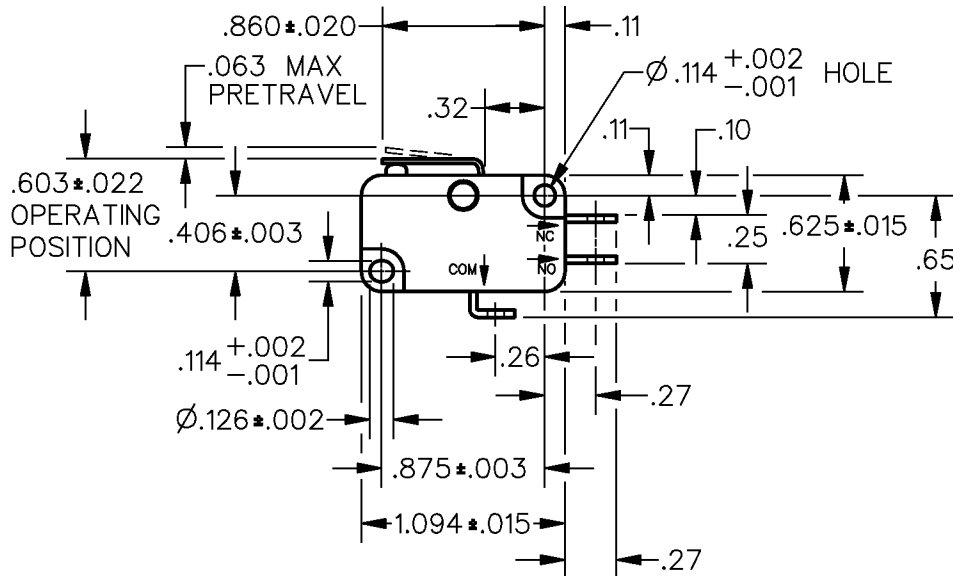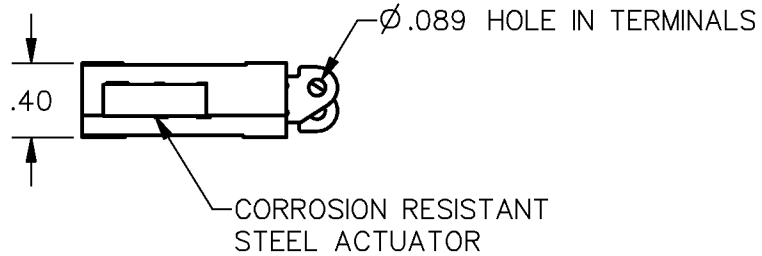


NOTES

- 1 - SWITCH MATERIALS WILL WITHSTAND TEMPERATURE OF 300°F
- 2 - CAUTION: OVERTRAVEL FORCE ON LEVER MUST NOT RESULT IN AN OVERTRAVEL FORCE ON PLUNGER EXCEEDING FIVE POUNDS
- 3 - TERMINALS ARE PLATED FOR SOLDERING

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA		SCALE FULL	DO NOT SCALE PRINT
OPERATING FORCE———159 GRAMS MAX	CONTACT ARRANGEMENT S P D T		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE — — —17 GRAMS MIN	L215 15.1A 1/2HP 125, <u>250</u> or 277 VAC 1/2A 125 VDC, 1/4A 250 VDC 5A 120 VAC "L" 		ONE PLACE (.0)	±.030
DIFFERENTIAL TRAVEL — — —.014 MAX			TWO PLACE (.00)	±.015
OVERTRAVEL — — — — —.036 MIN			THREE PLACE (.000)	±.005
RELEASE TRAVEL — — — — —.008 MIN			ANGLES	±
			WEIGHT	

