
### **Mounting Option**

.344 (8.74) Offset Card Guides

#### **Contact Detail**


Wire Wrap .046x.013(1.17x0.33) - Tail LG=.708(17.98) .156 [3.96] Contact Spacing x .200 [5.08] Row Spacing

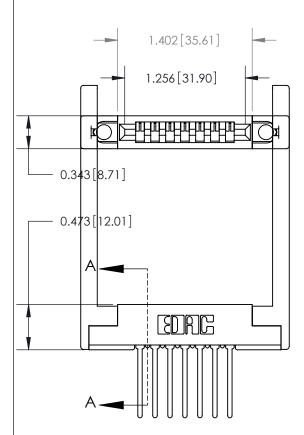

# **See Accompanying Pages for:**

- **Contact Bend Details**
- **Mounting Options**
- **Features and Specifications**



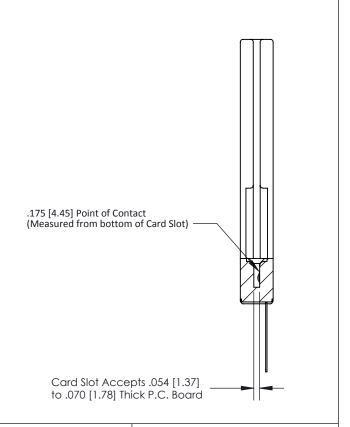

807 Series High Temp Card Edge Conr	nector
Part Number: 807-007-545-168	



	ACAD REFERENCE N	○. 807 ENG N	1ASTER
	DRAWN: J.LEE S	ECTIONS.A	<u>A</u> (4) <b>A</b>
	CHECKED:	DATE:	
,	SCALE: NTS	SHEET 1 C	)F 4
ED	DRAWING NUMBER	IS	SUE
5	807 Assembly		1





ISSUE NUMBE

ORIGINAL



#### **Features**

- CSA Approved and UL Recognized
- .156 (3.96) Contact Spacing x .200 (5.08) Row Spacing
- Accepts .062 (1.57) Nominal Thickness P.C. Board
- Low Profile Insulator Body .473 (12.01), with Card Guides
- Contact Termination Options include P.C. Tail, Wire Hole, Wire Wrap, 90 Degree & Extender Board Bends
- Single or Dual Row Configurations
- Large Variety of Mounting Options
- Pre-assembled Card Guides Available
- Accepts Between Contact and In-Contact Polarizing Keys

## **Specifications**

- Insulator Material: DAP
- Contact Material: Copper, Nickel, Tin Alloy CA-725
- Contact Plating: Gold on the Mating Area, Tin on the Contact Tails, Nickel Underplate
- Current Rating: 5 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum
- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +165 °C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070 (1.78) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054 (1.37) Thick Gauge

807 Series High Temp Card Edge Connector			ACAD REFERENCE NO. 807 ENG MASTER			
Features and Specifications		DRAWN:	J.LEE	DATE: AU	G. 11/09	
		CHECKED	):	DATE:		
	THESE DRAWINGS AND SPECIFICATIONS	SCALE:	NTS	SHEET .	4 OF 4	
I   S   I   G   ORONIO, ONIARIO	ARE THE PROPERTY OF EDAC INC.,AND SHALL NOT BE REPRODUCED,OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWING	NUMBER		ISSUE	
YOUR CONNECTION TO QUALITY & SERVICE		8	07 Assembly		1	