



Pressure measurement



Type:

Precont® PS4SC

Pressure switch for hygienic and general applications: Monitoring of absolute or relative pressure in gases, vapors, liquids and dust

In brief



Application

- General applications in
 - Machinery and plant engineering
 - Air-conditioning and refrigeration plant engineering
 - Hydraulic and pneumatic systems
 - Process industry
 - Environmental technology

Your benefits

- *Wide range of applications*
- Finely graded measuring ranges from 100 mbar up to 60 bar
- Wide process temperature range -40°C to +125°C
- Wide variety of process connections
- High protection class IP65 / IP67
- Wide environmental temperature range -40°C to +85°C
- Ceramic *front-flush or internal diaphragm*
- Increased accuracy – characteristic deviation ≤ 0,2% of measuring range
- Integrated evaluation electronic: Digital display, function LED's, keyboard / 2x PNP switch output / 1x current output 4...20mA / Connector plug M12
- *High operating comfort*: enclosure and display rotatable for *optimal operability* in each installation position
- Robust high brightness LED display for *best readability*
- 3-key operation without additional assistance with tactile feedback



spinpl.

Description

Due to the device construction with measuring ranges from -1 bar to 60 bar (gauge), measuring ranges from 0 bar to 60 bar (absolute), measuring spans from 100 mbar to 60 bar, process temperatures from -40°C to +125°C and process materials high purity Al2O3-ceramic / CrNi-steel as well as the availability of industrial standard process connections like thread ISO 228-1 (EN 837 manometer / inner thread / front-flush), dairy coupling DIN 11851 (front-flush), Varivent® (ront-flush), clamp ISO 2852 / BS 4825 / DIN 32676 (front-flush) and DRD (front-flush) the device is especially suitable for the use for machinery and plant engineering, air-conditioning and refrigeration plant engineering, hydraulic and pneumatic systems, process industry, environmental technology and facility and building automation.

The device is suitable for demanding measuring requirements.

Due to its high accuracy and the high flexibility of configuration, the device can be suited a wide variety of applications.

Through its optimized design, the front-flush process connection enables the cleanability of the wetted diaphragm to be integrated into the process.

The device is suitable for the use at CIP/SIP cleaning processes.

Low-maintenance and trouble-free pressure measurement is thus also guaranteed in critical applications with frequently changing media.

The robust design and the high-quality workmanship turns the device into a very high quality product, which even the most adverse environmental conditions cannot affect, whether the lowest temperatures when used outdoors, extreme shock and vibration or aggressive media.

A captive laser marking of the type label ensures the identifiability throughout the entire lifetime of the device.

Obviously is the optional marking of a measurement point designation resp. TAG, a customer label or of a neutral type label, of course also per laser marking.


A LABS-free resp. silicone-free version, a factory calibration with calibration certificate and a customer specific configuration resp. preset is also optionally available like a material test certificate EN10204 3.1 or factory certifications for drink water resp. food suitability.




Technical Data

| Technical Data | |
|--------------------------------------|---|
| Supply voltage: | 10,5...35VDC, reverse polarity protected |
| Supply current: | ≤ 60mA Analogue output max. 22,5mA Switch output with no load |
| 2xPNP-switch output | |
| Function: | PNP switch to +L |
| Output current: | 0... ≤ 200mA current limited, short circuit protected |
| Analogue output 4...20mA | |
| Operating range: | 3,9...21mA, min. 3,8mA, max. 22mA |
| Permitted load: | ≤ (US - 10,5V) / 22mA |
| Start-up time: | ≤ 1 ms |
| Measuring accuracy | |
| Characteristic deviation: | ≤ ± 0,2% FS |
| Long term drift: | ≤ ± 0,1% FS / year not cumulative |
| Temperature deviation | Zero: ≤ ± 0,015% FS / K, max. ± 0,75% (-20°C...+80°C) Span: ≤ ± 0,015% FS / K, max. ± 0,5% (-20°C...+80°C / > 400mbar), max. ± 0,8% (-20°C...+80°C / ≤ 400 mbar) |
| Materials | |
| Diaphragm: (process wetted) | Measuring range ≤ 1bar: Ceramic Al ₂ O ₃ – 99,7% (SIP suitable) Measuring range ≥ 1,6bar: Ceramic Al ₂ O ₃ – 96% (SIP suitable) Process connection 1/2/4/6/7/N/M/P/L/S/T: Ceramic Al ₂ O ₃ – 99,9% (CIP/SIP suitable) |
| Process connection: (process wetted) | Steel 1.4404/316L / Steel 1.4571/316Ti |
| Terminal enclosure: | CrNi-steel |
| Gaskets: (process wetted) | FPM – fluorelastomere (e.g. Viton®) EPDM – ethylene-propylene-dienmonomere, FDA-listed FFKM – perfluorrelastomere (e.g. Kalrez®) FFKM hd – perfluorrelastomere high density |
| Environmental conditions | |
| Environmental temperature: | - 40°C...+ 85°C |
| Process temperature: | -40...+100°C (extended -40...+125°C) |
| Process pressure: | - 1 bar ...60 bar (depending on process connection) |
| Protection: | IP65/IP67 EN/IEC 60529 |


Electrical connection

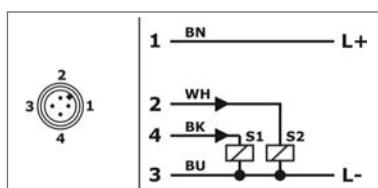


Signal 2x PNP
Conductor color standard connection cable M12
– A-coded: BN = brown, WH = white, BU = blue,
BK = black

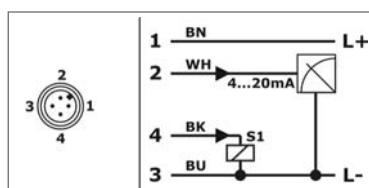

Signal 4...20 mA / 1x PNP
Conductor color standard connection cable M12
– A-coded: BN = brown, WH = white, BU = blue,
BK = black

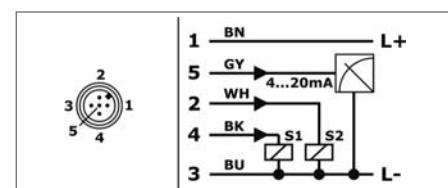

Signal 4...20 mA / 2x PNP
Conductor color standard connection cable M12 – A-coded:
BN = brau brown n, WH = white, BU = blue, BK = black,
GY = grau

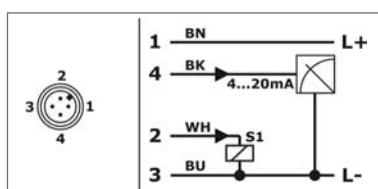


Signal 4...20 mA / 1x PNP / Desina
Conductor color standard connection cable M12
– A-coded: BN = brown, WH = white, BU = blue,
BK = black

Dimension drawings




Type:
Precont® PS4SC


Terminal enclosure

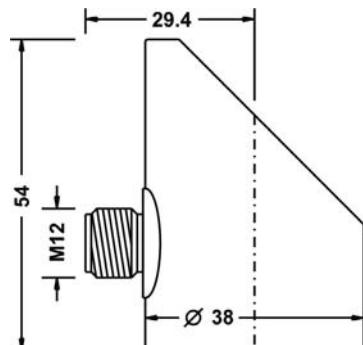


Type 1 – Thread ISO 228-1 –
G½"A, EN 837

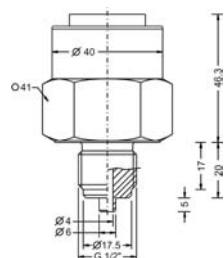


Type 9 – Thread ISO 228-1 –
G½"B, front-flush




Type 7 – Thread ISO 228-1 –
G1½"B, front-flush

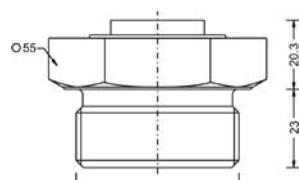


Type M – Dairy coupling DIN
11851 – DN50, PN25

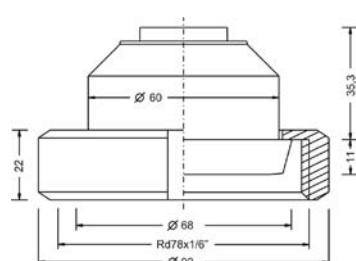


Temperature decoupler

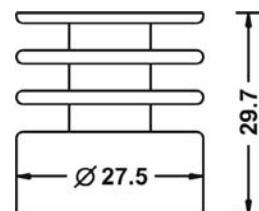


Type 4 – Thread ISO 228-1 –
G¼" I, inner thread

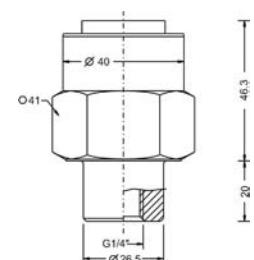


Type 8 – Thread ISO 228-1 –
G¾"A, front-flush

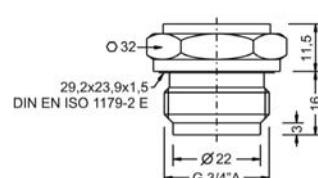


Type R – Dairy coupling DIN
11851 – DN25, PN40

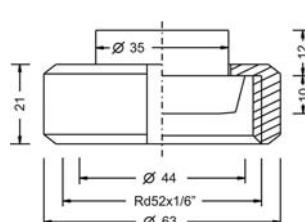


Type P – Varivent® – Type N /
tube DN40-162 / 1½"-6", PN40

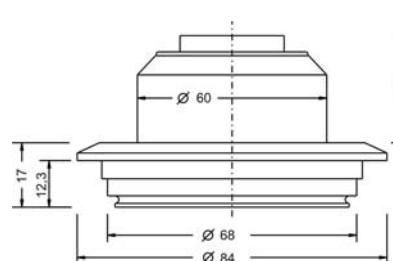


Type 6 – Thread ISO 228-1 –
G¼"A, EN 837

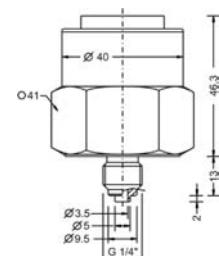


Type 2 – Thread ISO 228-1 –
G½"A, inner bore

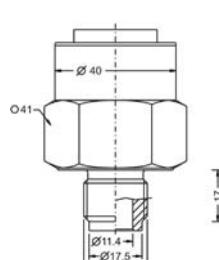


Type 5 – Thread ISO 228-1 –
G1"A, front-flush

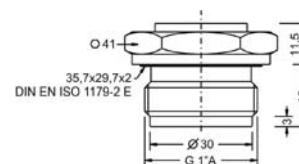

Type N – Dairy coupling DIN
11851 – DN40, PN25

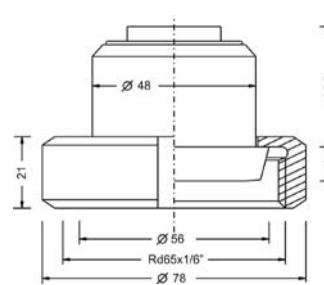

Type L – DRD – DN50 / Ø65mm,
PN25

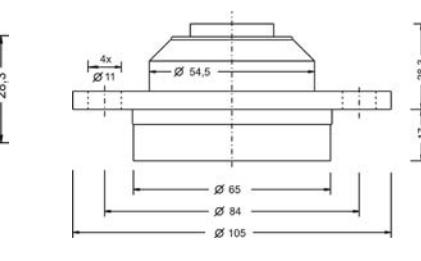

Order code

| | | | | | | | | | |
|------------|------|---|---|---|---|---|---|---|--|
| Order code | PS4S | C | S | V | C | S | 1 | S | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Type
Standard

Measuring system – material diaphragm (process wetted) / sensor type / accuracy
Ceramic Al₂O₃ 96%/99,7%/99,9% / capacitive

Approval
Standard

Process connection

- 6 Thread ISO 228-1 – G₁/₄"A, EN 837 manometer
- 1 Thread ISO 228-1 – G₁/₄"A, EN 837 manometer
- 4 Thread ISO 228-1 – G₁/₄"I, inner thread
- 2 Thread ISO 228-1 – G₁/₂"A, inner bore
- 9 Thread ISO 228-1 – G₁/₂"B, front-flush, ≤ 20 bar
- 8 Thread ISO 228-1 – G₃/₄"A, front-flush, ≤ 20 bar
- 5 Thread ISO 228-1 – G₁"A, front-flush, ≤ 20 bar
- 7 Thread ISO 228-1 – G₁₁/₂"B, front-flush
- R Dairy coupling DIN 11851 – DN25, PN40, ≤ 20 bar
- N Dairy coupling DIN 11851 – DN40, PN40
- M Dairy coupling DIN 11851 – DN50, PN25
- P Varivent® – Type N / tube DN40-162 / 1₁/₂"-6", PN40
- L DRD – DN50 / Ø65mm, PN25
- S Clamp ISO 2852 – DN25-38 / BS 4825 – 1"-1₁/₂" / DIN 32676 – DN25-38, PN25
- T Clamp ISO 2852 – DN40-51 / BS 4825 – 2" / DIN 32676 – DN50, PN25
- Y others

Material process gaskets (process wetted)

- 1 FPM – fluorelastomere (e.g. Viton®)
- 3 EPDM – ethylene-propylene-dienmonomere, FDA-listed
- 4 FFKM – perfluor elastomere (e.g. Kalrez®)
- 6 FFKM hd – perfluor elastomere high density - gas applications
- Y others

Material process connection (process wetted)

- V CrNi-steel
- C CrNi-steel

Material terminal enclosure

Measuring range

- 26 0...0,05 bar
- 01 0...0,1 bar
- 02 0...0,25 bar
- 03 0...0,4 bar
- 04 0...0,6 bar
- 05 0...1 bar
- 06 0...1,6 bar
- 07 0...2,5 bar
- 08 0...4 bar
- 09 0...6 bar
- 10 0...10 bar
- 11 0...16 bar
- 12 0...20 bar
- 15 -0,1...0 bar
- 16 -1...0 bar
- 17 -1...+1 bar
- 18 -0,1...+0,1 bar
- YY Special measuring range

Electronic – output

- A 2x switch PNP, supply 24VDC
- B 1x switch PNP, 1x signal 4...20mA , supply 24VDC
- C 2x switch PNP, 1x signal 4...20mA, supply 24VDC
- D 1x switch PNP, 1x signal 4...20mA, supply 24VDC, Desina

Electronic – function

- S Standard

Process temperature

- 0 Standard -40°C...+100°C
- 1 Extended -40°C...+125°C, temperature decoupler

Pressure type

- R Gauge pressure
- A Absolute pressure, ≥ 1 bar

Measuring system – accuracy

- 1 0,2%

Electrical connection

- S Plug M12x1

Precont®
Equipment

Order information
 BKZ0412-VA
 BKZ0512-VA
 LKZ0405PUR-AS
 LKZ0410PUR-AS
 LKZ0505PUR-AS
 LKZ0510PUR-AS

Model
 Matching cable socket, VA-nut
 Matching cable socket, VA-nut
 Connection cable 5 m, 4-pole, shielded
 Connection cable 10 m, 4-pole, shielded
 Connection cable 5 m, 5-pole, shielded
 Connection cable 10 m, 5-pole