RoHS
Halogen-Free

| Edition | Modifier | Date | Description | ECN No. |
|---|---|---|---|---|
| | | | | |
| | | | | |

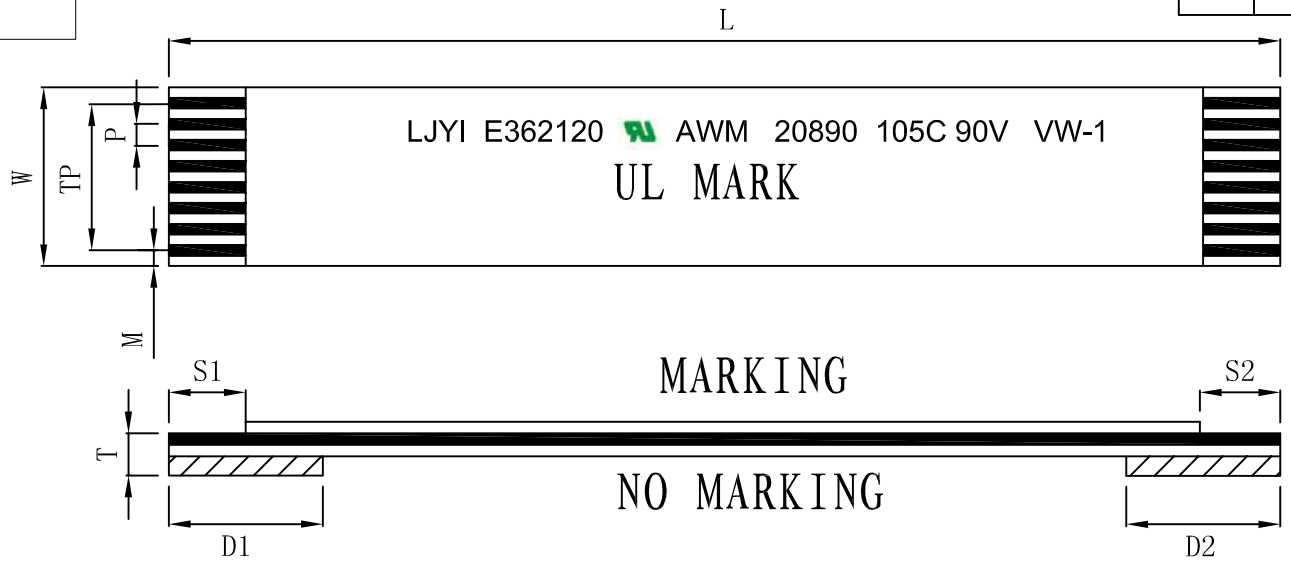


| Item | Code | Spec |
|---|---|---|
| NO of PIN | N | 50 |
| Pitch | P | 0.5±0.05 |
| Total Length | L | 76±1 |
| Margin | M | 0.5±0.05 |
| **Thickness** | T | 0.3±0.03 |
| Strip Length | S1 | 3.5±0.5 |
| | S2 | 3.5±0.5 |
| Supporting Length | D1 | 6.0±1.0 |
| | D2 | 6.0±1.0 |
| Total Pitch | TP | 24.5±0.05 |
| Total Width | W | 25.5±0.05 |
| Conductors | Width | 0.3±0.03 |
| | Thickness | 0.035±0.005 |
| | Plated | Sn(1um) Min |
| Film | White | 0.06mm |
| | White | 0.06mm |
| Supporting | Blue | 0.225mm |
| UL NO. | **UL20890(105℃ 90V)** | |

Processing requirement:

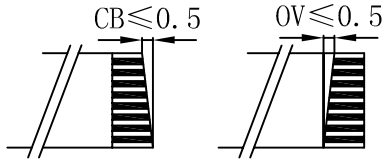


| NO. | Specification description | Number | Remarks |
|---|---|---|---|
| 1. | | | |
| | | | |

# CnC Tech, LLC

Industrial Cable and Connector Technology

| | | |
|---|---|---|
| DRAWN BY: | DATE: 2018/07/20 | DESCRIPTION: 50-76-0.5-3.5/3.5-6/6-A-Tin |
| CHECKED BY: | SHEET 1 of 1 | ITEM NO. 310-50-0076 |
| APPROVED BY: | SCALE 1:1 | REV. A/0 / UNIT: mm |