
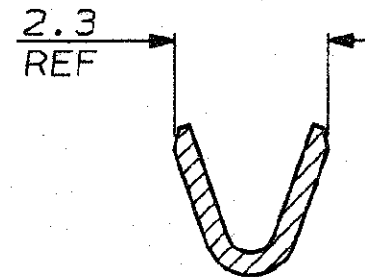
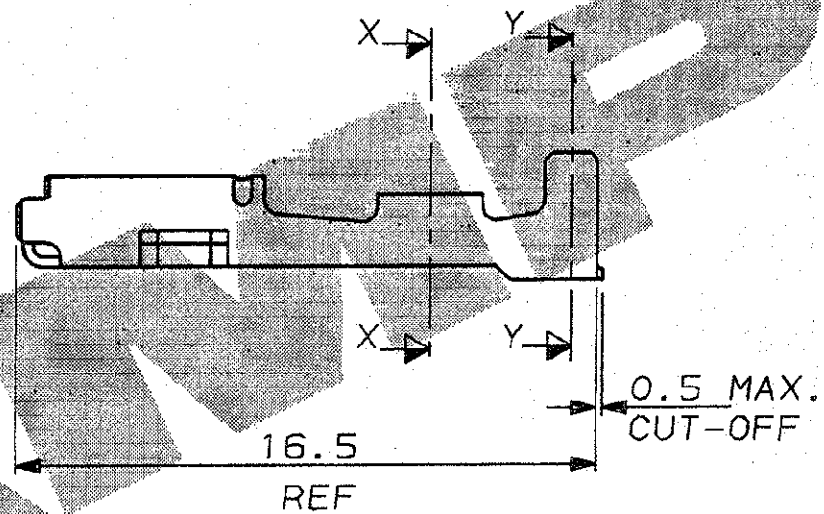



C.A.D. FILE CODE  
5. C345949. A

DO NOT SCALE

DIMENSIONS IN MM.



SECTION X-X  
SCALE: 10:1

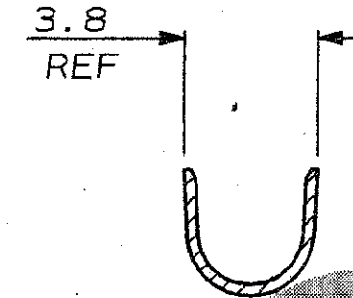

SECTION Y-Y

WIRE RANGE: 0.2 TO 0.5 mm<sup>2</sup>

INSULATION RANGE: 1.6 TO 1.8 mm DIA.

THIN WALLED CABLE TO BE USED

SEALED APPLICATIONS ONLY.

PRODUCT SPEC. 108-3069

APPLICATION SPEC. 114-3040

H/TOOL PN.525317-6 (FOR 0.5 mm<sup>2</sup> WIRES)

PRE-TINNED BRASS		MADE FROM STRIP PN.345808-1		345949-1	
FINISH		MATERIAL		PART NUMBER	
CUSTOMER DWG FOR REFERENCE ONLY		© COPYRIGHT 1991 BY AMP OF GREAT BRITAIN LTD. ALL INTERNATIONAL RIGHTS RESERVED. ALL PRODUCTS MAY BE COVERED BY BRITISH AND FOREIGN PATENTS AND/OR PATENTS PENDING.		RELEASED FOR PUBLICATION 09 JUL 1991	
-	-	TOLERANCES UNLESS OTHERWISE STATED DEC ± 0.5 ANGLES ± 1°		DR. R.J.S. 9.7.91 CH. H.McG. APP. J.P.	
A ES00-0041-01		L. 02.01		AMP of Great Britain Ltd. TERMINAL HOUSE STAMORE MIDDX.	
2	WIRE BARREL WAS PRE-FORMED	C2882	12.11.91	LOOSE PIECE .070" RECEPTACLE ECONOSEAL 3 L.C. (SEALED)	
1	PRELIM. ISSUE	-	9.7.91	SCALE	LOC
REV	APPROVED	ECN	DATE	5/1	E
				SIZE	DWG. No.
				A3	C345949
				REV	SHEET
				A	1/1