


REVISIONS			DATE	APPROVED
ZONE	LTR	DESCRIPTION	1/24/80	<i>Blair</i>
	C	CHANGE PER DCO 01075		

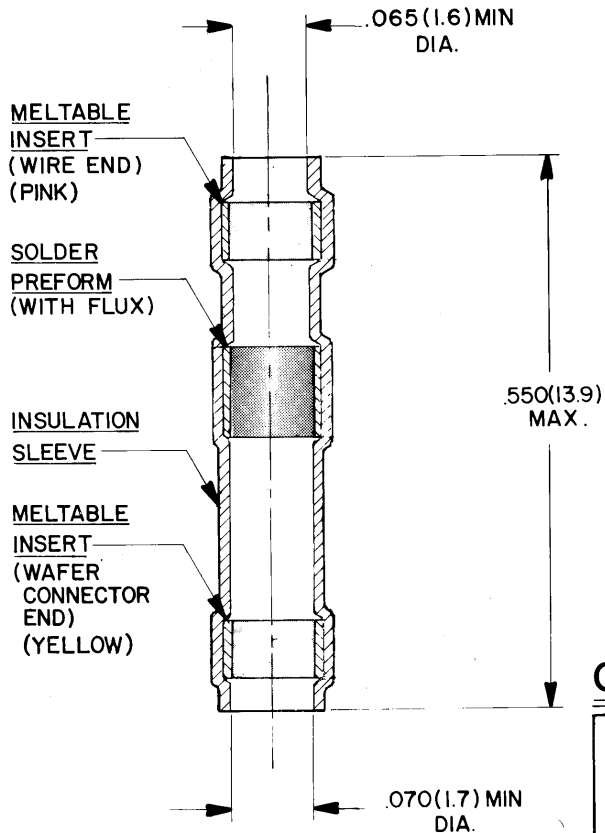

NOTES 8

1. MATERIALS

- 1-A INSULATION SLEEVE; HEAT SHRINKABLE, RADIATION CROSSLINKED MODIFIED POLYVINYLIDENE FLUORIDE, TRANSPARENT BLUE.
- 1-B SOLDER PREFORM; SOLDER PREFORM WITH FLUX TYPE: Sb5 SRAP PER QQ-S-571.
- 1-C MELTABLE INSERTS; LOW OUTGASSING IMMERSION RESISTANT THERMOPLASTIC

2. THIS SLEEVE IS DESIGNED TO ATTACH 20 THROUGH 26 GAUGE TIN PLATED OR SILVER PLATED CONDUCTORS TO THE TERMINALS OF A **Raychem** MTC100 SERIES WAFER.

© Raychem Corporation 1979

## CONNECTOR SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES BRACKETED DIMENSIONS ( ) ARE METRIC AND TOLERANCES ARE:  .XXX: ± ( M. M. ) .XX: ± ( M. M. ) Δ: ±	DRAWN	SA. LOPEZ	5-7-79	<b>Raychem</b> <small>RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025</small>
	CHECKED	<i>Ph</i>		
	APPROVED	<i>Blair</i>	5-7-79	
	APPROVED	<i>E. Steiner</i>	5-7-79	
	APPROVED	<i>Steiner</i>	5-7-79	TITLE
				SOLDER SLEEVE WIRE TERMINATOR DOUBLE SEAL FOR TEMP RATING 150°C(Sb5)MTC100 SERIES
	PROJECT	6448-7055	SIZE	CODE IDENT
			<b>B</b>	NO. 06090
			DWG. NO.	CTA-0025
			WEIGHT	SHEET 1 OF 1

If this document is printed it becomes uncontrolled.  
Check with the web for latest revision.

DO NOT SCALE THIS DRAWING