GlobTek, Inc. www.globtek.com				
U U				
Northvale, NJ 07647				
Tel. (201) 784-1000	Part No./Ordering No. 360M1368F27032(R)	Rev A1		
Fax (201) 784-0111				

CUSTOMIZED LENGTHS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AVAILABLE AT https://www.globtek.com/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS, FERRITES MAY VARY SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at <u>https://www.globtek.com/iso-certificates/</u> Prop 65 Statement:https://en.globtek.com/prop-65-statement.pdf

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (<u>https://en.globtek.com/terms-and-conditions/</u>).

The purchaser of this product (Customer) agrees that it is their sole responsibility to determine suitability/fitness of the product described in this specification for their application and to take precautions for protection against any hazards attendant to the handling and use of the product.

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc. Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2021 - 2023

	Drawing Title: HOSPITAL GRADE WITH GREEN DOT, NEMA 6-20P MALE 2 PRONG PLUG WITH GROUND to NORTH AMERICAN IEC60320-C19 CONNECTOR, GT Cable #136: 12 / 3 Conductors, 10.8mm OD, SJT, 60 Deg.C, 300V, BLK/WHT/GRN, Approvals: , 2515±50mm, GlobTek Black Model No. Power Cord		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 360M1368F27032(R)	Rev A1	
Fax (201) 784-0111			

REVISION HISTORY

REV DESCRIPTION		SUB	DATE	APPROVED
A1	Update hanking from 200±20 mm to 250±30 mm	QA	09/15/2022	QA
A	Initial release	QA	11/10/2021	QA

Cordset Information:

CordsetColor:GlobTek Black

Cord Length (mm):2515±50


NOTES:

Cord, Plug and Connector must be marked with approval symbols of file number(s)

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2021 - 2023


GlobTek, Inc. www.globtek.com	OD SIT 60 Deg C 300V/ BLK/M/HT/CRN Approvale: 2515+50mm ClohTek Black		
186 Veterans Drive, Model No. Power Cord			
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 360M1368F27032(R)	Rev A1	
Fax (201) 784-0111			

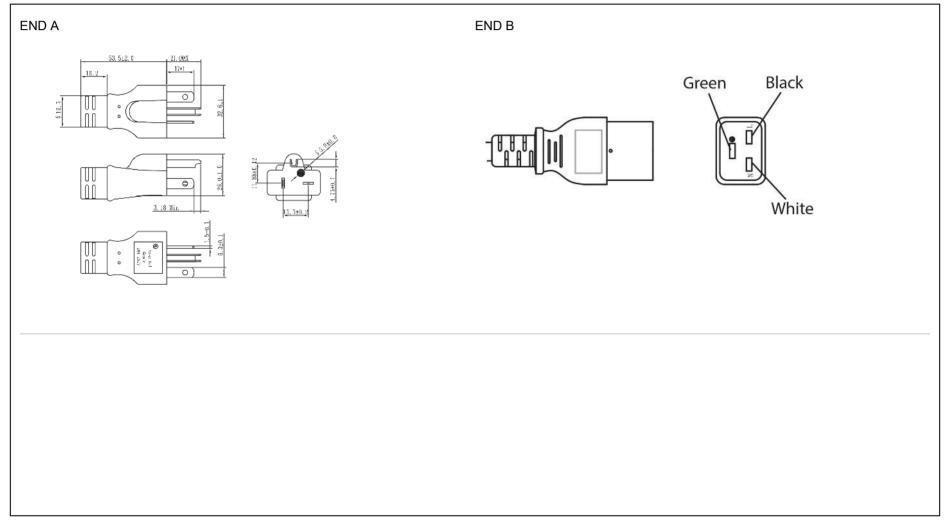

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2021 - 2023

	.com OD, SJT, 60 Deg.C, 300V, BLK/WHT/GRN, Approvals: , 2515±50mm, GlobTek Black		
U U			
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. 360M1368F27032(R)	Rev A1	
Fax (201) 784-0111			

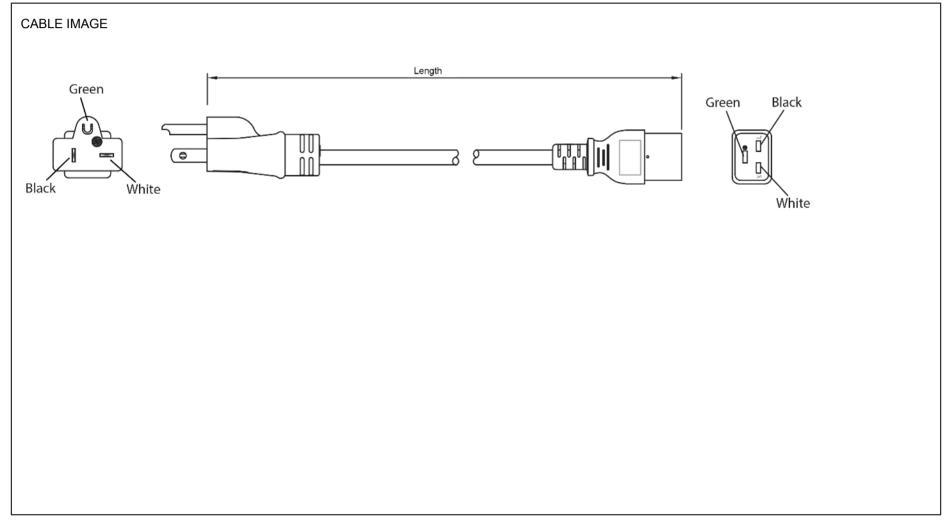

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2021 - 2023

www.globtek.com OD, SJT, 60 Deg.C, 300V, BL	Drawing Title: HOSPITAL GRADE WITH GREEN DOT, NEMA 6-20P MALE 2 PRONG PLUG WITH GROUND to NORTH AMERICAN IEC60320-C19 CONNECTOR, GT Cable #136: 12 / 3 Conductors, 10.8mm OD, SJT, 60 Deg.C, 300V, BLK/WHT/GRN, Approvals: , 2515±50mm, GlobTek Black Model No. Power Cord				
Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Part No./Ordering No. 360M1368F27032(R)				
https://www.globtek.com/connectors/ STANDARI	PES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT <u>https://www.globtek</u> PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWIS	.com/connectors/ ACTUAL CONNECTORS, OVERMOLDS,			
End A Code:360M Description:HOSPITAL GRADE WITH GREEI 6-20P MALE 2 PRONG PLUG WITH GROUN Rating (V):250 Rating (A):20.0 Gender:Male Overmolded:Yes		End B Code:7032UL1 Description:NORTH AMERICAN IEC60320-C19 CONNECTOR Rating (V):250 Rating (A):20.0 Gender:Female Overmolded:Yes			
Overall cable rating:125V 20A Plug Approvals	Cable Approvals	Connector Approvals			
€					
	ation of UL CSA assemblies of UL rated parts, so, the combination of UL CS up to a UL or certified plugs, connectors, andf cables total up to a UL or	• • •			
AGENCY ONLINE DOCUMENTS	http://en.globtek.com/cordsets/				

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2021 - 2023

	Drawing Title: HOSPITAL GRADE WITH GREEN DOT, NEMA 6-20P MALE 2 PRONG PLUG WITH GROUND to NORTH AMERICAN IEC60320-C19 CONNECTOR, GT Cable #136: 12 / 3 Conductors, 10.8mm OD, SJT, 60 Deg.C, 300V, BLK/WHT/GRN, Approvals: , 2515±50mm, GlobTek Black			
186 Veterans Drive,	Model No. Power Cord			
Northvale, NJ 07647				
Tel. (201) 784-1000	Part No./Ordering No. 360M1368F27032(R)	Rev A1		
Fax (201) 784-0111				

RoHS/RoHS3 Declaration	https://www.globtek.com/pdf/rohs_cert/01t3a000005Jw9zAAC
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf
Prop 65 Statement	https://en.globtek.com/prop-65-statement.pdf
CE.UKCA.Cord	https://globtek.secure.force.com/spec/ec_decl_product_model_family_incl_cord?id=01t3a000005Jw9z
DV// anti- a in the second sec	and souther and the share it is it is it to the stars from the stars in the form and size a

IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2021 - 2023

GlobTek, Inc. www.globtek.com	Drawing Title: HOSPITAL GRADE WITH GREEN DOT, NEMA 6-20P MALE 2 PRONG PLUG WITH GROUND to NORTH AMERICAN IEC60320-C19 CONNECTOR, GT Cable #136 OD, SJT, 60 Deg.C, 300V, BLK/WHT/GRN, Approvals: , 2515±50mm, GlobTek Black	: 12 / 3 Conductors, 10.8mm
186 Veterans Drive,	Model No. Power Cord	
Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Part No./Ordering No. 360M1368F27032(R)	Rev A1
	HS, COLORS, CABLE TYPES, TERMINATIONS/PLUGS/RECEPTACLES AVAILABLE UPON REQUEST. ADDITIONAL PLUG OPTIONS ARE AV	
	n/connectors/ STANDARD PLUGS AND CONNECTORS CAN BE SEEN ONLINE AT https://www.globtek.com/connectors/ ACTUAL CONNECTOR	RS, OVERMOLDS,
	SLIGHTLY FROM THE PICTURE BELOW DIMENSIONS ARE IN MM UNLESS SPECIFIED OTHERWISE	
Hanking:360M-7032 Description:250±30 r Image:	nm	
Notes/Modifications/0	Customizations (notes in this section supersede the values shown in the standard spec):	

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2021 - 2023