

# IPD W 3P2,5 F M20 GY - Panel feed-through



1088689

<https://www.phoenixcontact.com/pc/products/1088689>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Panel feed-through, Push-in connection, number of positions: 2+PE, 0.5 mm<sup>2</sup> ... 2.5 mm<sup>2</sup>, 500 V, 20 A, light grey, assembly thread: M20, Push-in connection

## Your advantages

- Convenient: quick and easy assembly without special tools

## Commercial data

Item number	1088689
Packing unit	1 pc
Minimum order quantity	1 pc
Product key	BF6LAA
GTIN	4055626891040
Weight per piece (including packing)	31.2 g
Weight per piece (excluding packing)	31 g
Customs tariff number	85366990
Country of origin	CN

# IPD W 3P2,5 F M20 GY - Panel feed-through



1088689

<https://www.phoenixcontact.com/pc/products/1088689>

## Technical data

### Product properties

Product type	Panel feed-through
Product family	IPD
Number of positions	3
Connection profile	2+PE
Position marking	L, N, PE
Number of connections per position	1
Series	IPD

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Connection data

#### Connection technology

Connection technology	Push-in connection
Connection system, internal	Push-in connection
Frequency of connections between conductors of the same cross section	10

#### Conductor connection

Conductor cross section flexibel	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section solid	0.5 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Connection cross section AWG	20 ... 14

### Electrical properties

Rated surge voltage (III/3)	6 kV
Rated current	20 A
Rated voltage (III/3)	500 V
Nominal voltage U <sub>N</sub>	500 V AC
	500 V DC
Nominal current I <sub>N</sub>	20 A

### Material specifications

Material	PA
Contact material	Cu
Contact surface material	Ni/Ag/Sn

### Cable/line

Position marking	L, N, PE
------------------	----------

### Mounting

Mounting type	M20
---------------	-----

# IPD W 3P2,5 F M20 GY - Panel feed-through



1088689

<https://www.phoenixcontact.com/pc/products/1088689>


Connection method	Push-in connection
-------------------	--------------------

## Environmental and real-life conditions


### Ambient conditions

Degree of protection	IP66
	IP68 (2 m / 24 h)
	IP69K
Ambient temperature (operation)	-30 °C ... 100 °C
Temperature when conductor connected	-5 °C ... 50 °C
Ambient temperature (storage/transport)	-30 °C ... 100 °C

Drawings

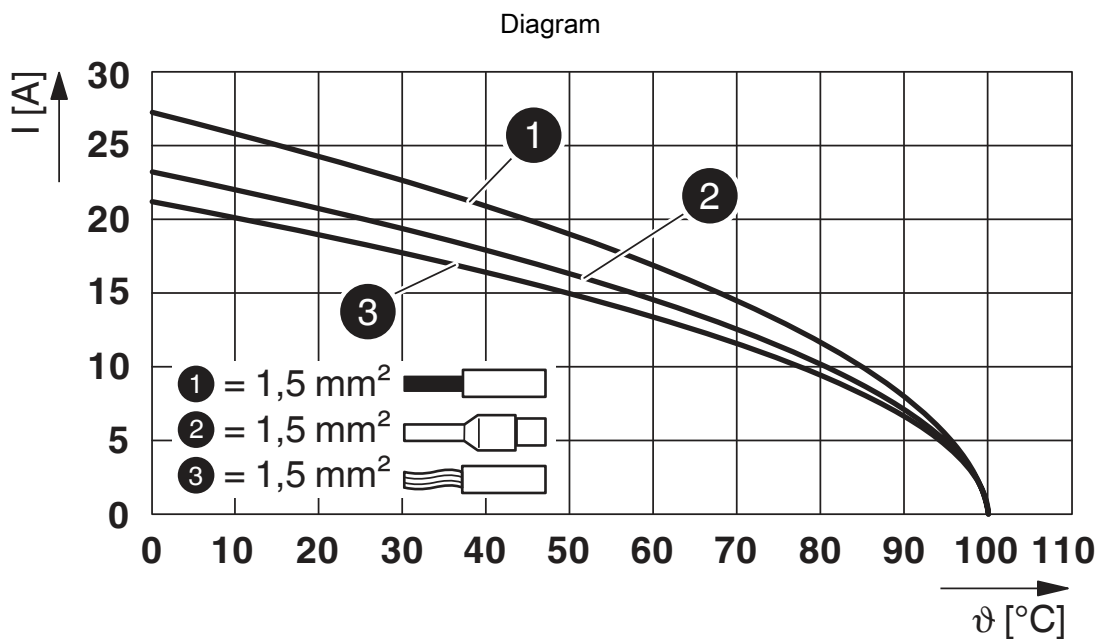

Derating diagram for 1.5 mm<sup>2</sup>

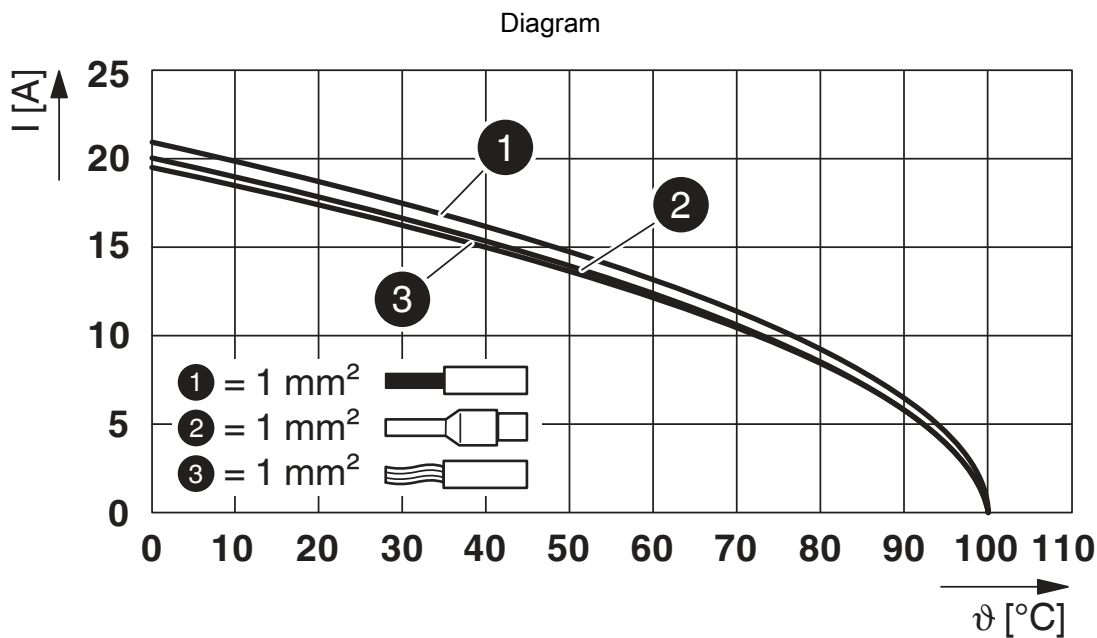


Derating diagram for 1.0 mm<sup>2</sup>

# IPD W 3P2,5 F M20 GY - Panel feed-through



1088689

<https://www.phoenixcontact.com/pc/products/1088689>

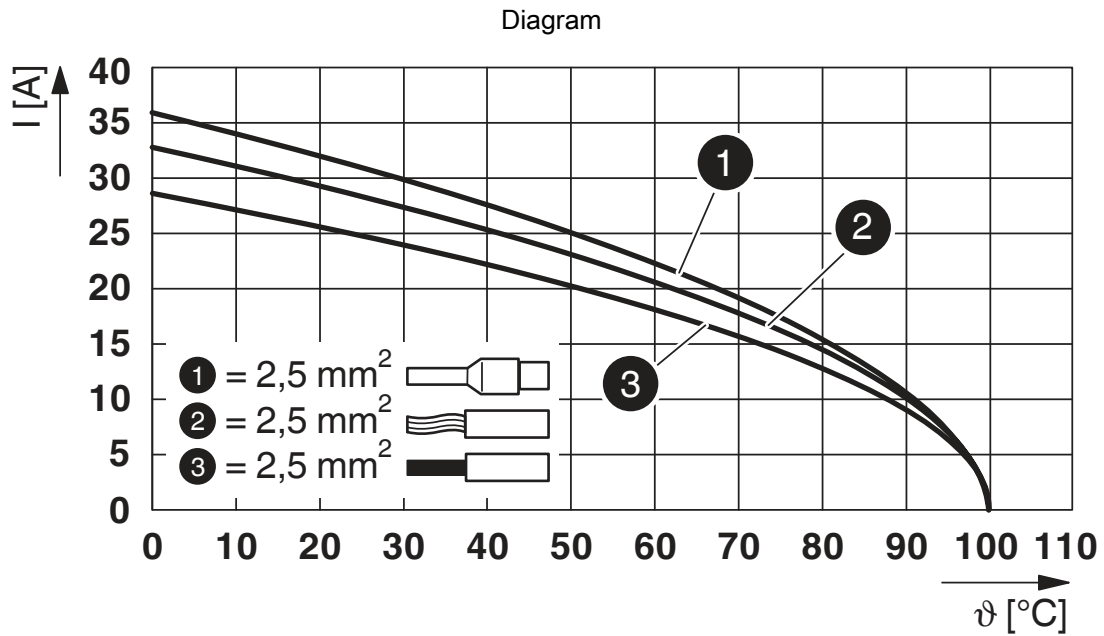

Derating diagram for 2.5 mm<sup>2</sup>

# IPD W 3P2,5 F M20 GY - Panel feed-through



1088689

<https://www.phoenixcontact.com/pc/products/1088689>

## Classifications

### ECLASS

ECLASS-11.0	27440602
ECLASS-12.0	27440602
ECLASS-13.0	27440602

### ETIM

ETIM 8.0	EC002566
----------	----------

### UNSPSC

UNSPSC 21.0	39121500
-------------	----------

# IPD W 3P2,5 F M20 GY - Panel feed-through



1088689

<https://www.phoenixcontact.com/pc/products/1088689>

## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

# IPD W 3P2,5 F M20 GY - Panel feed-through

1088689

<https://www.phoenixcontact.com/pc/products/1088689>

## Mandatory accessories

### IPD PL 3P2,5 M GY - Connector

1088672

<https://www.phoenixcontact.com/pc/products/1088672>



Connector, Push-lock connection, number of positions: 2+PE, 0.5 mm<sup>2</sup> ... 2.5 mm<sup>2</sup>, 500 V, 20 A, light grey, external cable diameter: 6 mm ... 9 mm and 8 mm .. 13 mm, Push-lock connection

---

## Accessories

### ZBF 4:UNBEDRUCKT - Zack Marker strip, flat

0808587

<https://www.phoenixcontact.com/pc/products/0808587>



Zack Marker strip, flat, Strip, white, unlabeled, can be labeled with: CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 4.2 x 5.2 mm, Number of individual labels: 10



# IPD W 3P2,5 F M20 GY - Panel feed-through



1088689

<https://www.phoenixcontact.com/pc/products/1088689>

## UC-TMF 4 - Marker for terminal blocks

0818166

<https://www.phoenixcontact.com/pc/products/0818166>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 3.6 x 5.1 mm, Number of individual labels: 120

---

## UCT-TMF 4 - Marker for terminal blocks

0828742

<https://www.phoenixcontact.com/pc/products/0828742>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 4.2 mm, lettering field size: 3.4 x 4.7 mm, Number of individual labels: 90

# IPD W 3P2,5 F M20 GY - Panel feed-through



1088689

<https://www.phoenixcontact.com/pc/products/1088689>

## SZF 1-0,6X3,5 - Screwdriver

1204517

<https://www.phoenixcontact.com/pc/products/1204517>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

---

## CRIMPFOX CENTRUS 6S - Crimping pliers

1213144

<https://www.phoenixcontact.com/pc/products/1213144>



Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm<sup>2</sup> ... 6 mm<sup>2</sup>, also for TWIN ferrules up to 2 x 4 mm<sup>2</sup>, automatic cross section adjustment, lateral insertion, equipped with fall protection

---

Phoenix Contact 2023 © - all rights reserved  
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstraße 8  
D-32825 Blomberg  
+49 (0) 5235-3 00  
[info@phoenixcontact.com](mailto:info@phoenixcontact.com)