

ANGELA-M-B

~30° medium beam compatible with BJB and B+W connectors

SPECIFICATION:

Dimensions	Ø 119.5 mm
Height	74.5 mm
Fastening	socket
ROHS compliant	yes ⓘ


MATERIALS:

Component	Type	Material	Colour	Finish	Coating
ANGELA-M-B	Reflector	PC	metal		HMDS

ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
F13663_ANGELA-M-B » Box size: 398 x 298 x 265 mm	180	90	45	9.1


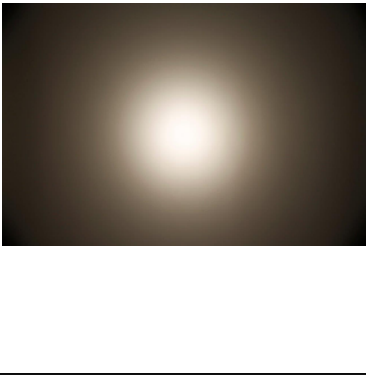
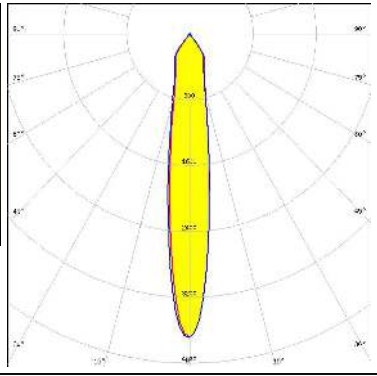

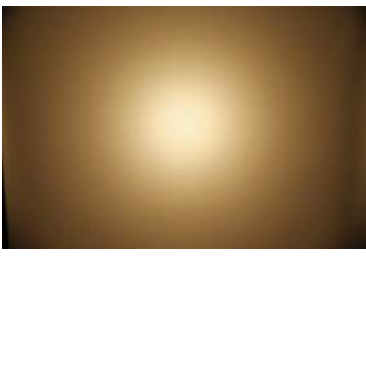
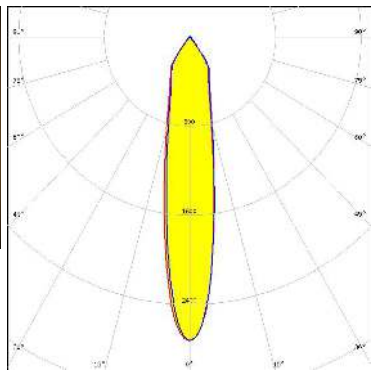


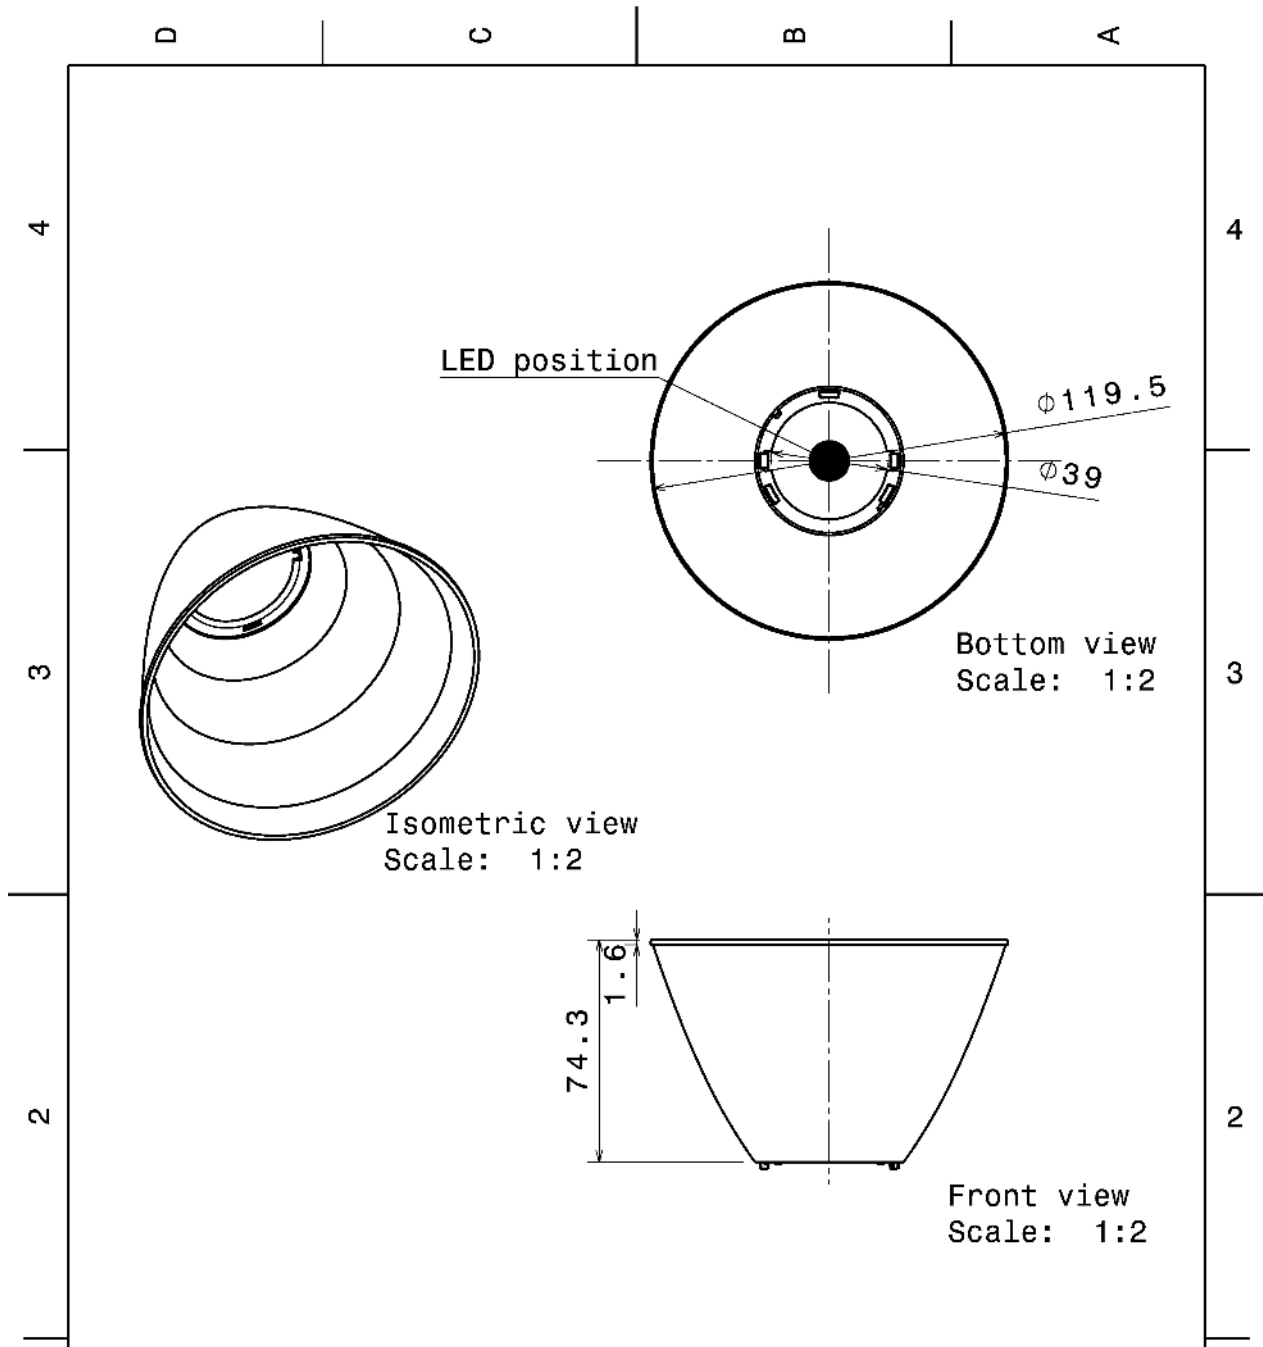









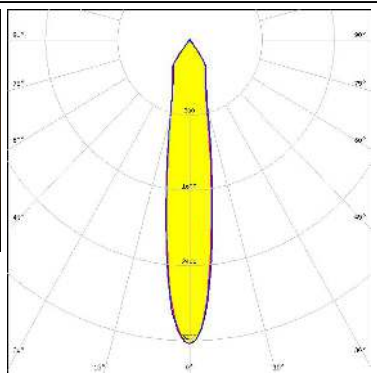




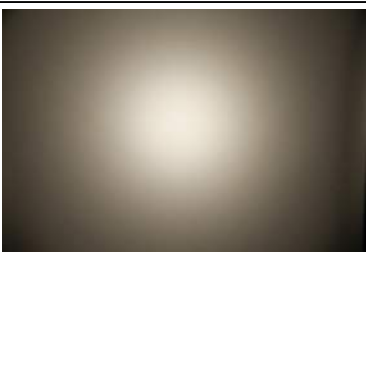
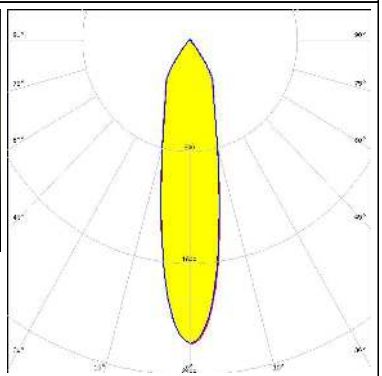
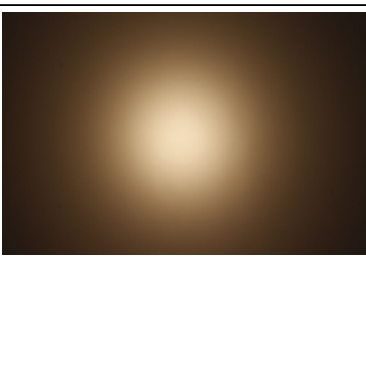
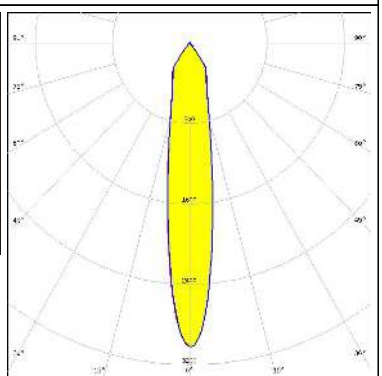
Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: Up to 30mm class M, otherwise class C. According to DIN ISO 2768-2 Form and position: class L		LEDiL LediL Oy Salorankatu 10 FIN 24240 SALO Finland	
THIRD ANGLE PROJECTION:		DRAWING TITLE <h2 style="text-align: center;">Angela-B</h2>	
This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.		SIZE A4	PART NUMBER -
SCALE 1:2		WEIGHT -	SHEET 1/1

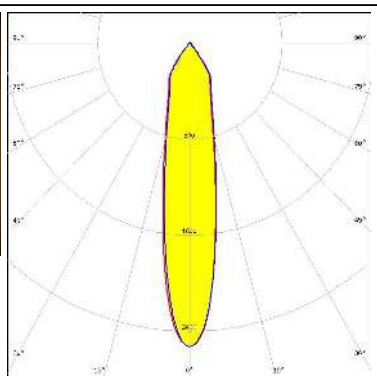See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):

<p></p> <p>LED BXRA ES Rectangle FWHM / FWTM 16.0° / 58.0° Efficiency 82 % Peak intensity 3.7 cd/lm LEDs/each optic 1 Light colour White Required components: BJB: 47.319.2040</p>		
<p></p> <p>LED V15 Gen6 FWHM / FWTM 19.0° / 69.0° Efficiency 77 % Peak intensity 2.7 cd/lm LEDs/each optic 1 Light colour White Required components: F13671_ANGLE-RZ-LENS BJB: 47.319.2224</p>		
<p></p> <p>LED V15 Gen6 FWHM / FWTM 18.0° / 67.0° Efficiency 80 % Peak intensity 3.2 cd/lm LEDs/each optic 1 Light colour White Required components: BJB: 47.319.2224</p>		
<p></p> <p>LED V18 Gen6 FWHM / FWTM 21.0° / 69.0° Efficiency 77 % Peak intensity 2.5 cd/lm LEDs/each optic 1 Light colour White Required components: F13671_ANGLE-RZ-LENS BJB: 47.319.2274</p>		


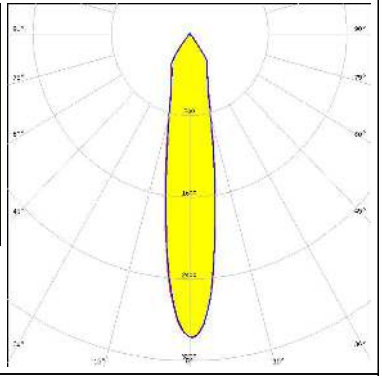
OPTICAL RESULTS (MEASURED):
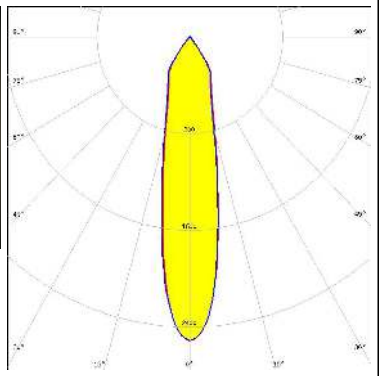
<p></p> <p>LED V18 Gen7 FWHM / FWTM 19.0° / 68.0° Efficiency 81 % Peak intensity 3 cd/lm LEDs/each optic 1 Light colour White Required components: BJB: 47.319.2350</p>		
<p></p> <p>LED V22 Gen6 FWHM / FWTM 22.0° / 69.0° Efficiency 78 % Peak intensity 2.5 cd/lm LEDs/each optic 1 Light colour White Required components: A.A.G. STUCCHI: 8102-G2</p>		
<p></p> <p>LED V22 Gen6 FWHM / FWTM 23.0° / 70.0° Efficiency 74 % Peak intensity 2.2 cd/lm LEDs/each optic 1 Light colour White Required components: F13671_ANGE-RZ-LENS A.A.G. STUCCHI: 8102-G2</p>		
<p>CITIZEN</p> <p>LED CLL03x/CLU03x FWHM / FWTM 18.0° / 67.0° Efficiency 77 % Peak intensity 3 cd/lm LEDs/each optic 1 Light colour White Required components: F13671_ANGE-RZ-LENS A.A.G. STUCCHI: 8101-G2</p>		

OPTICAL RESULTS (MEASURED):



CITIZEN

LED CLL03x/CLU03x
 FWHM / FWTM 16.0° / 61.0°
 Efficiency 83 %
 Peak intensity 3.6 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 A.A.G. STUCCHI: 8101-G2

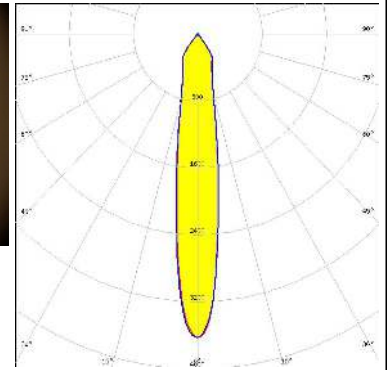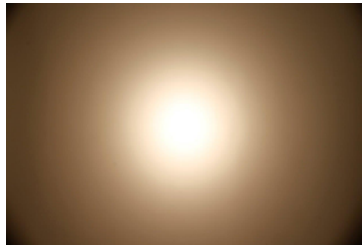



CITIZEN

LED CLL03x/CLU03x
 FWHM / FWTM 16.0° / 57.0°
 Efficiency 83 %
 Peak intensity 3.8 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2021

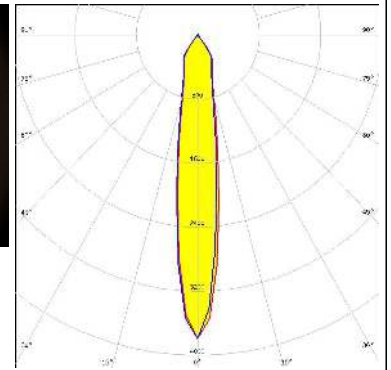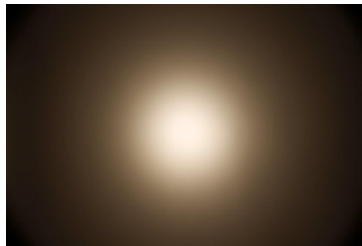



CITIZEN

LED CLL04x/CLU04x
 FWHM / FWTM 21.0° / 62.0°
 Efficiency 81 %
 Peak intensity 2.7 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2030

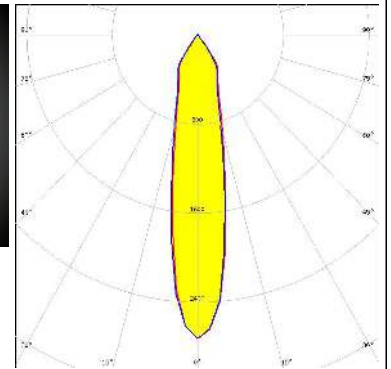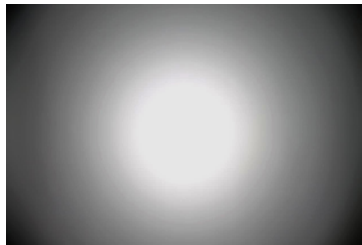

CITIZEN



LED CLL04x/CLU04x
 FWHM / FWTM 22.0° / 70.0°
 Efficiency 76 %
 Peak intensity 2.3 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 F13671_ANGE-RZ-LENS
 A.A.G. STUCCHI: 8102-G2

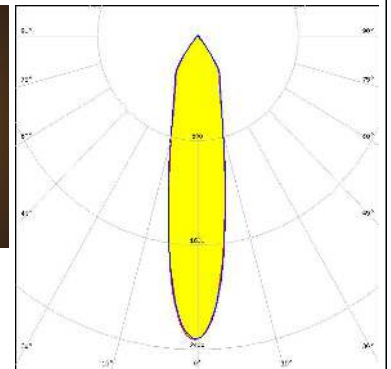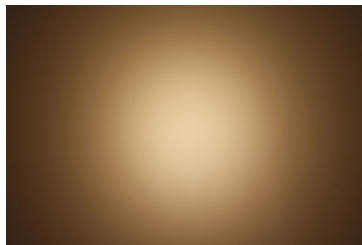

OPTICAL RESULTS (MEASURED):



CITIZEN

LED CLL04x/CLU04x
 FWHM / FWTM 21.0° / 69.0°
 Efficiency 81 %
 Peak intensity 2.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 A.A.G. STUCCHI: 8102-G2

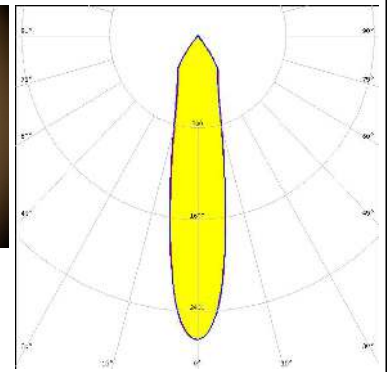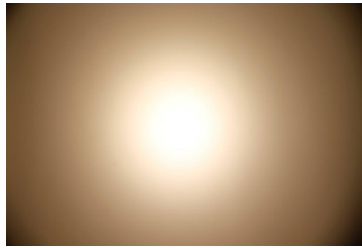


CITIZEN

LED CLU720/721/723
 FWHM / FWTM 14.0° / 53.0°
 Efficiency 83 %
 Peak intensity 4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 A.A.G. STUCCHI: 8101-G2

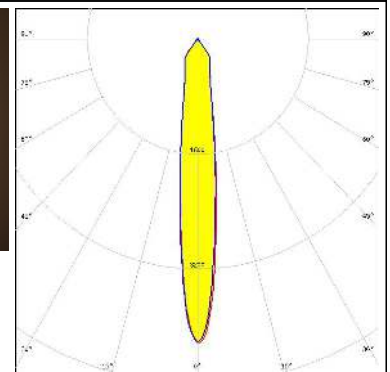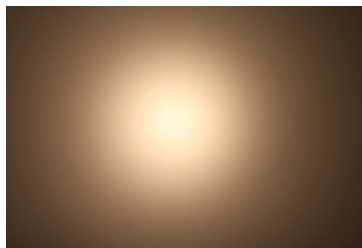



CITIZEN

LED CLU720/721/723
 FWHM / FWTM 14.0° / 50.0°
 Efficiency 82 %
 Peak intensity 4.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2021

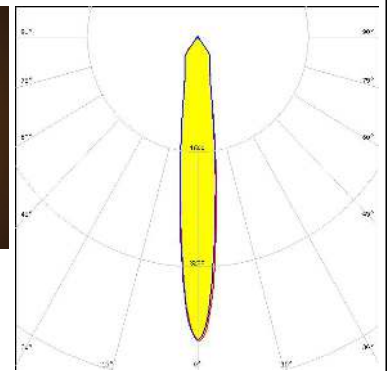
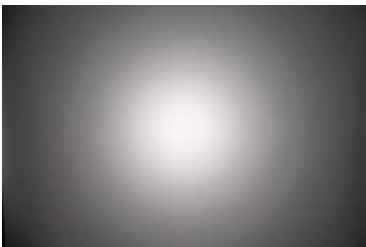
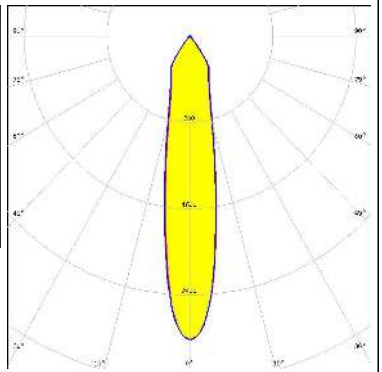




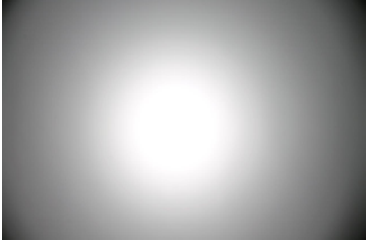
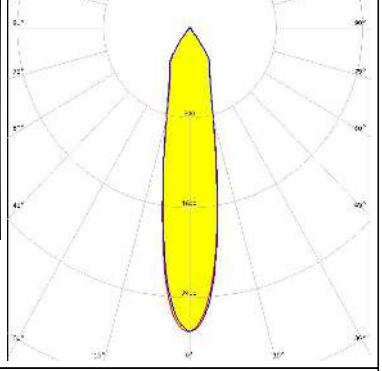


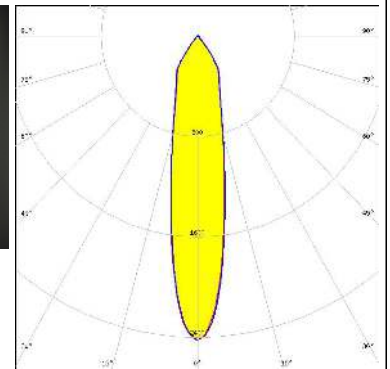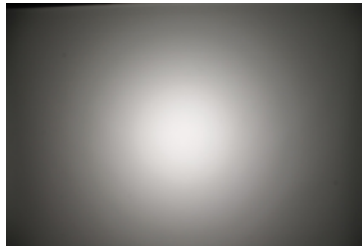


CREE LED


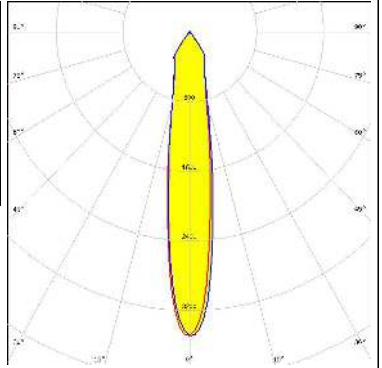

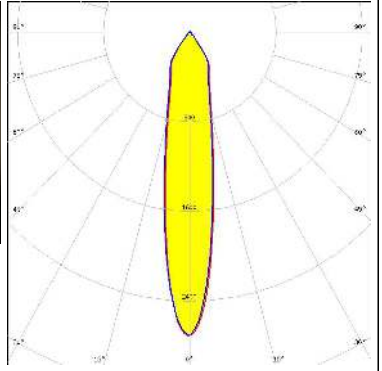
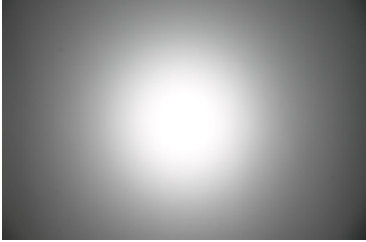
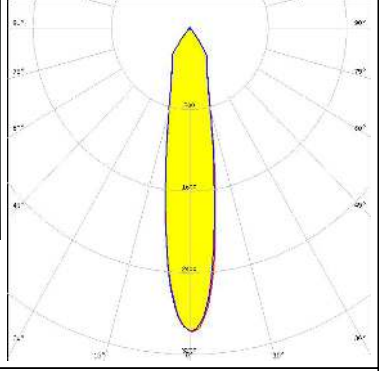
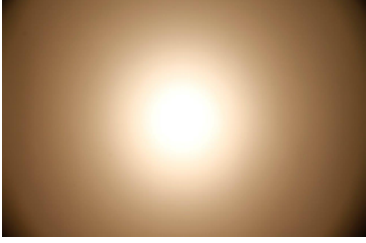
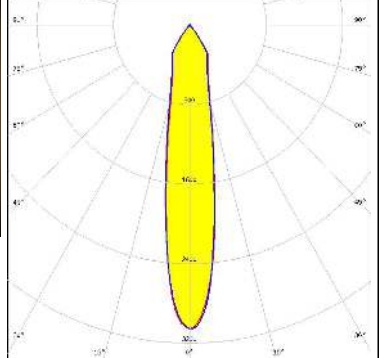
LED CXA/B 25xx
 FWHM / FWTM 21.0° / 69.0°
 Efficiency 76 %
 Peak intensity 2.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F13671_ANGLE-RZ-LENS
 BJB: 47.319.2141

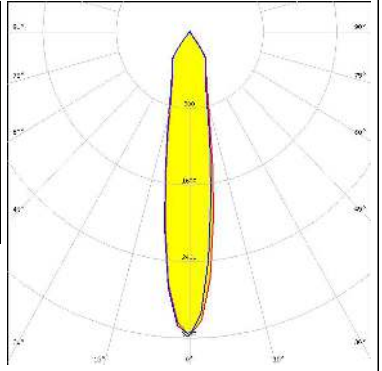









OPTICAL RESULTS (MEASURED):
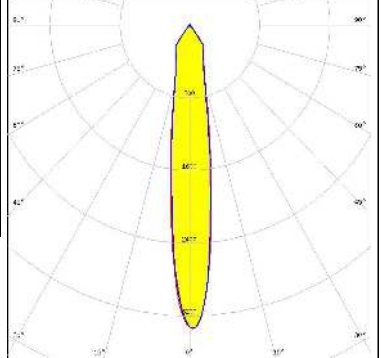
<p>CREE  LED</p> <p>LED CXA/B 25xx FWHM / FWTM 20.0° / 68.0° Efficiency 79 % Peak intensity 2.8 cd/m LEDs/each optic 1 Light colour White Required components: BJB: 47.319.2141</p>		
<p>CREE  LED</p> <p>LED CXA/B 25xx FWHM / FWTM 18.0° / 67.0° Efficiency 82 % Peak intensity 3.2 cd/m LEDs/each optic 1 Light colour White Required components: A.A.G. STUCCHI: 8401-G2</p>		
<p>CREE  LED</p> <p>LED CXA/B 30xx FWHM / FWTM 21.0° / 68.0° Efficiency 80 % Peak intensity 2.7 cd/m LEDs/each optic 1 Light colour White Required components: A.A.G. STUCCHI: 8404-G2</p>		
<p> LUMILEDS</p> <p>LED LUXEON CoB 1204/1205 FWHM / FWTM 16.0° / 56.0° Efficiency 82 % Peak intensity 3.8 cd/m LEDs/each optic 1 Light colour White Required components: A.A.G. STUCCHI: 8301-G2</p>		


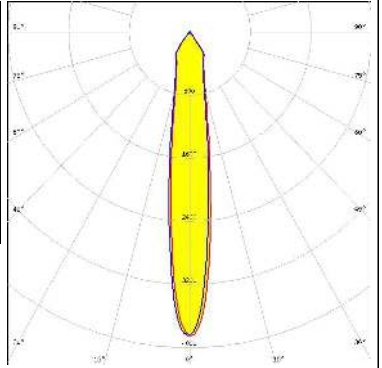

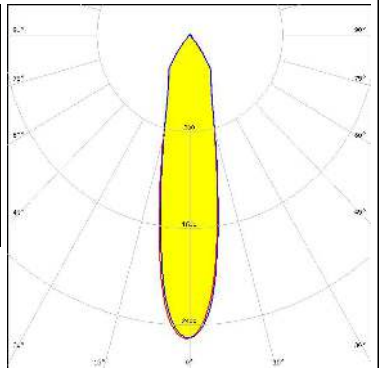
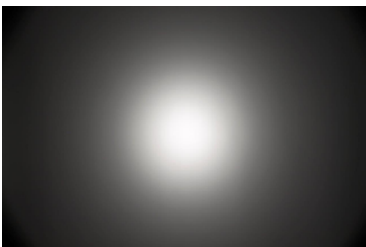
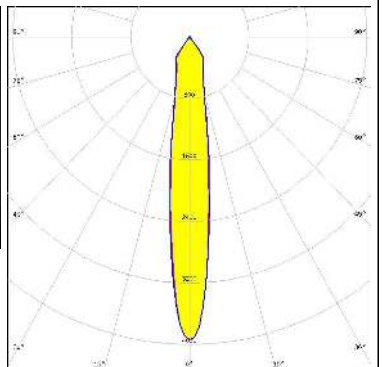
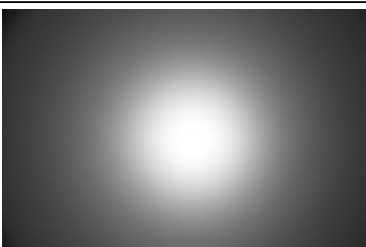
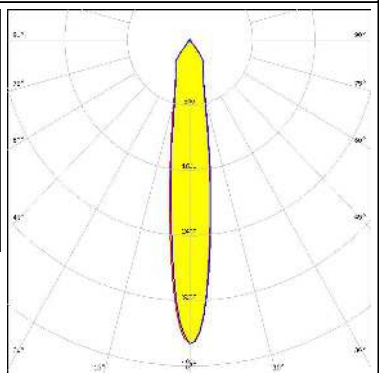
OPTICAL RESULTS (MEASURED):

<p>LUMILEDS</p> <p>LED LUXEON CoB 1208</p> <p>FWHM / FWTM 17.0° / 64.0°</p> <p>Efficiency 83 %</p> <p>Peak intensity 3.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: A.A.G. STUCCHI: 8301-G2</p>		
<p>LUMILEDS</p> <p>LED LUXEON CoB 1208</p> <p>FWHM / FWTM 19.0° / 69.0°</p> <p>Efficiency 77 %</p> <p>Peak intensity 2.7 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: F13671_ANGE-RZ-LENS A.A.G. STUCCHI: 8301-G2</p>		
<p>LUMILEDS</p> <p>LED LUXEON CoB 1211</p> <p>FWHM / FWTM 19.0° / 67.0°</p> <p>Efficiency 80 %</p> <p>Peak intensity 3 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: BJB: 47.319.2030</p>		
<p>LUMILEDS</p> <p>LED LUXEON CoB 1211</p> <p>FWHM / FWTM 19.0° / 67.0°</p> <p>Efficiency 81 %</p> <p>Peak intensity 3.1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: A.A.G. STUCCHI: 8102-G2</p>		


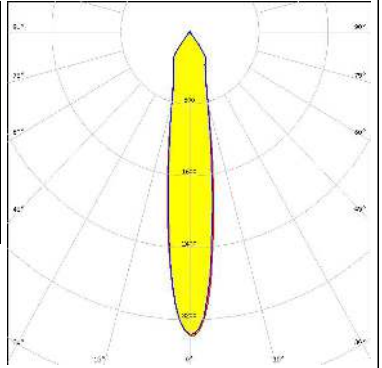
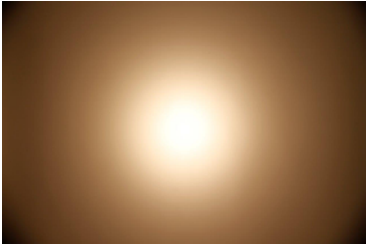
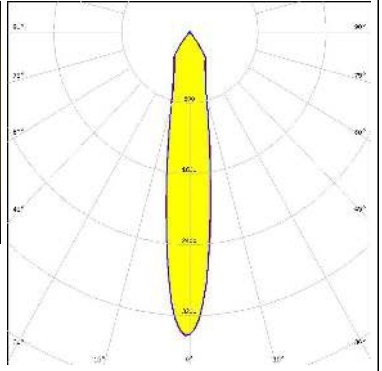

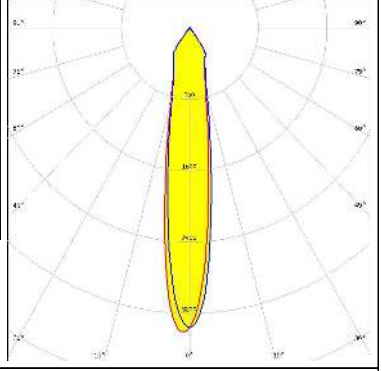
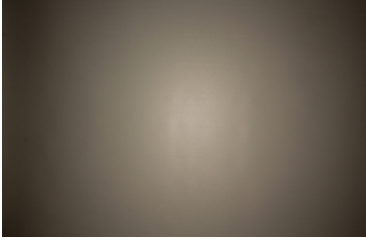
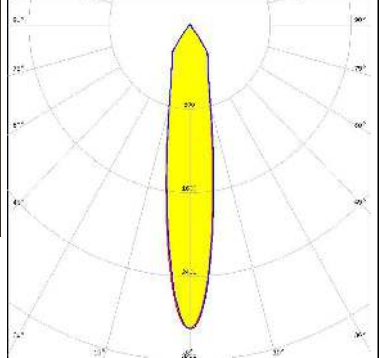
OPTICAL RESULTS (MEASURED):
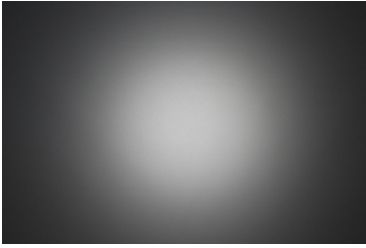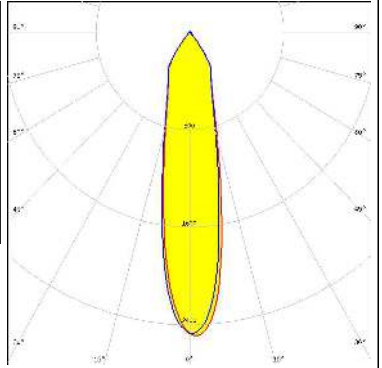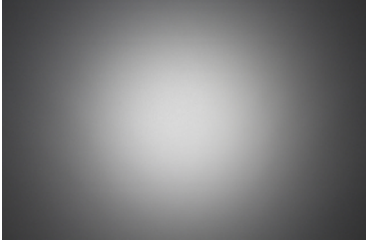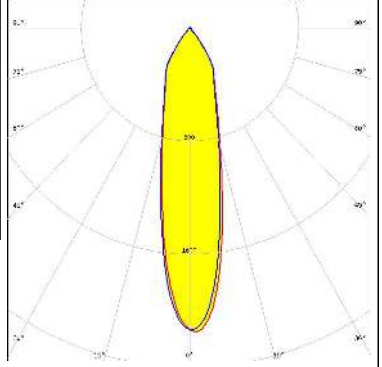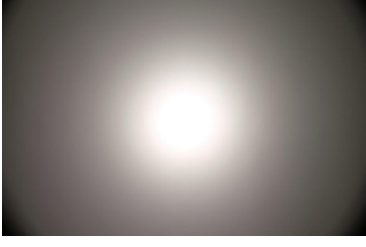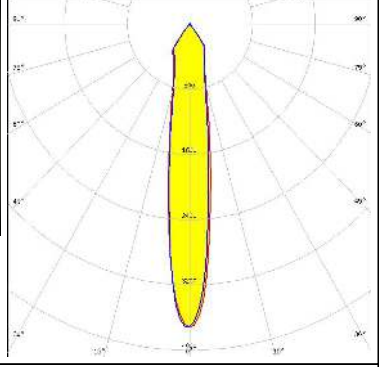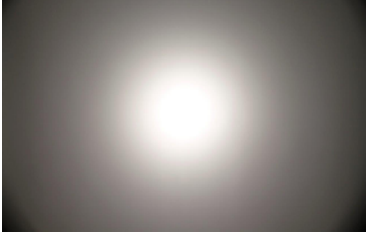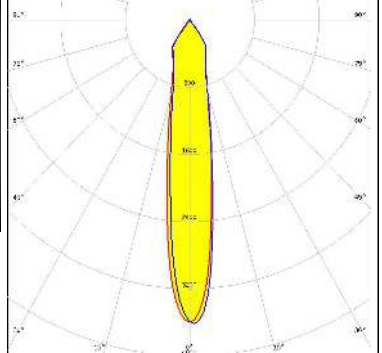
<p>LUMILEDS</p> <p>LED LUXEON CoB 1216/1812</p> <p>FWHM / FWTM 22.0° / 69.0°</p> <p>Efficiency 79 %</p> <p>Peak intensity 2.5 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: BJB: 47.319.2030</p>		
<p>LUMILEDS</p> <p>LED LUXEON CoB 1216/1812</p> <p>FWHM / FWTM 24.0° / 70.0°</p> <p>Efficiency 75 %</p> <p>Peak intensity 2.2 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: F13671_ANGE-RZ-LENS BJB: 47.319.2030</p>		
<p>LUMILEDS</p> <p>LED LUXEON K12</p> <p>FWHM / FWTM 17.0° / 65.0°</p> <p>Efficiency 87 %</p> <p>Peak intensity 3.7 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: BJB: 47.319.2070</p>		
<p>LUMILEDS</p> <p>LED LUXEON K16</p> <p>FWHM / FWTM 17.0° / 67.0°</p> <p>Efficiency 87 %</p> <p>Peak intensity 3.7 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: BJB: 47.319.2070</p>		

OPTICAL RESULTS (MEASURED):

<p>LUMINUS</p> <p>LED CxM-14 (19x19)</p> <p>FWHM / FWTM 16.0° / 56.0°</p> <p>Efficiency 82 %</p> <p>Peak intensity 3.9 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: BJB: 47.319.2021</p>		
<p>LUMINUS</p> <p>LED CxM-22 (28x28)</p> <p>FWHM / FWTM 22.0° / 69.0°</p> <p>Efficiency 81 %</p> <p>Peak intensity 2.5 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: BJB: 47.319.2030</p>		
<p>OSRAM Opto Semiconductors</p> <p>LED Soleriq S13</p> <p>FWHM / FWTM 15.0° / 55.0°</p> <p>Efficiency 83 %</p> <p>Peak intensity 4 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: A.A.G. STUCCHI: 8502-G2</p>		
<p>OSRAM Opto Semiconductors</p> <p>LED Soleriq S13 19x19</p> <p>FWHM / FWTM 16.0° / 56.0°</p> <p>Efficiency 80 %</p> <p>Peak intensity 3.7 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: BJB: 47.319.2021</p>		


OPTICAL RESULTS (MEASURED):

<p>OSRAM Opto Semiconductors</p> <p>LED Soleriq S19</p> <p>FWHM / FWTM 18.0° / 65.0°</p> <p>Efficiency 83 %</p> <p>Peak intensity 3.4 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: BJB: 47.319.2170</p>		
<p>OSRAM Opto Semiconductors</p> <p>LED Soleriq S19</p> <p>FWHM / FWTM 17.0° / 65.0°</p> <p>Efficiency 83 %</p> <p>Peak intensity 3.4 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: A.A.G. STUCCHI: 8503-G2</p>		
<p>SAMSUNG</p> <p>LED LC016D / LC019D / LC026D / LC033D</p> <p>FWHM / FWTM 17.0° / 66.0°</p> <p>Efficiency 81 %</p> <p>Peak intensity 3.4 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: A.A.G. STUCCHI: 8101-G2</p>		
<p>SAMSUNG</p> <p>LED LC016D / LC019D / LC026D / LC033D</p> <p>FWHM / FWTM 18.0° / 68.0°</p> <p>Efficiency 78 %</p> <p>Peak intensity 2.9 cd/m</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: F13671_ANGLE-RZ-LENS A.A.G. STUCCHI: 8101-G2</p>		

OPTICAL RESULTS (MEASURED):



SAMSUNG

LED LC016D / LC019D / LC026D / LC033D
 FWHM / FWTM 17.0° / 66.0°
 Efficiency 81 %
 Peak intensity 3.4 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2021


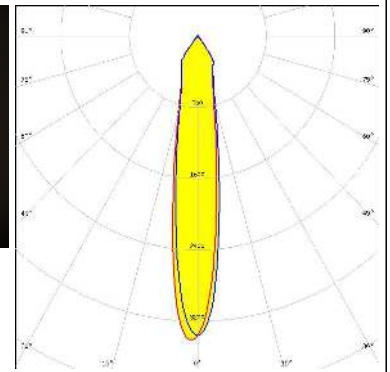


SAMSUNG



LED LC016D / LC019D / LC026D / LC033D
 FWHM / FWTM 18.0° / 68.0°
 Efficiency 78 %
 Peak intensity 2.9 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 F13671_ANGE-RZ-LENS
 BJB: 47.319.2021

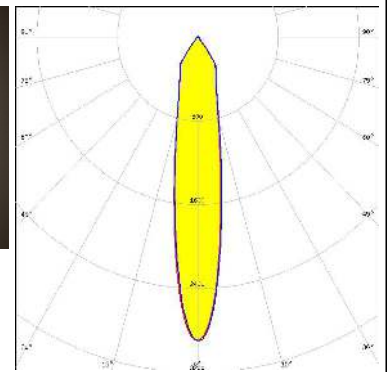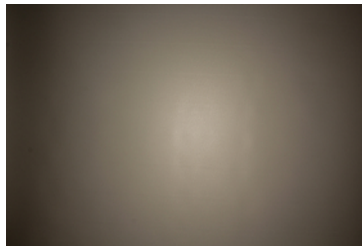


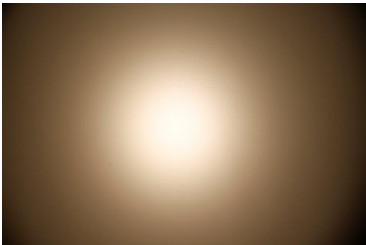
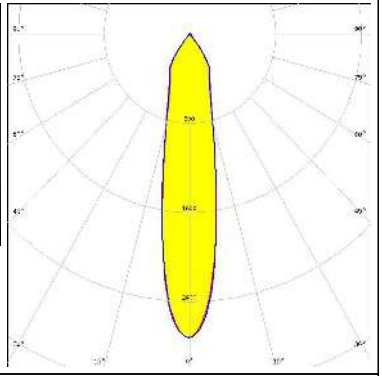

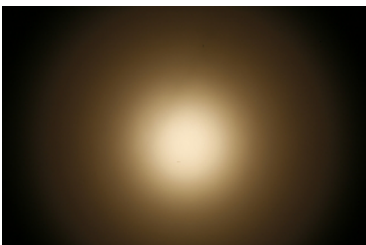
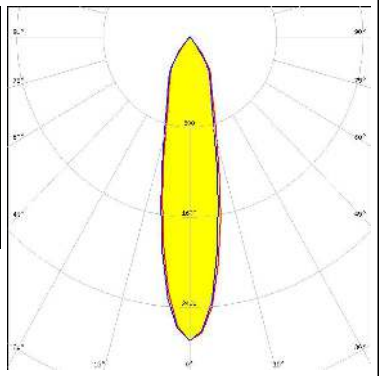
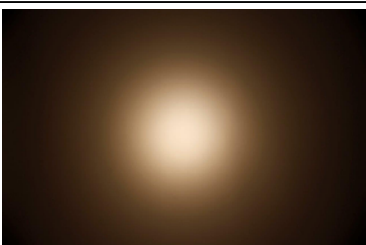
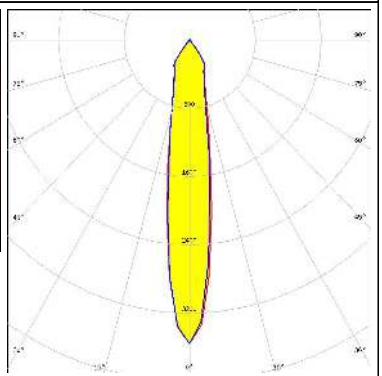
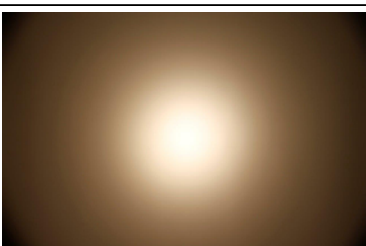
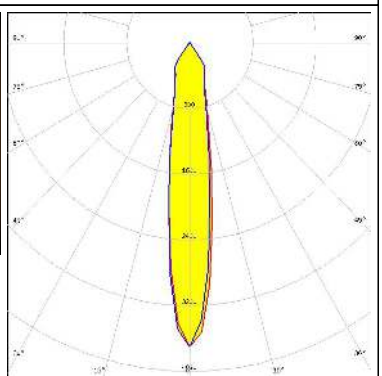
SEOUL SEMICONDUCTOR
 LED ZC12/18
 FWHM / FWTM 16.0° / 57.0°
 Efficiency 82 %
 Peak intensity 3.8 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 A.A.G. STUCCHI: 8101-G2

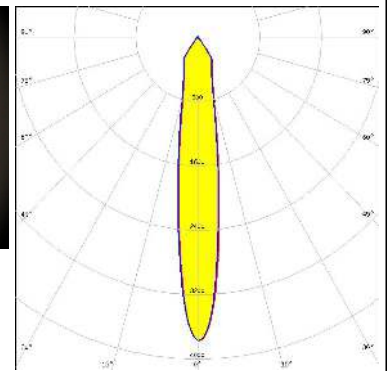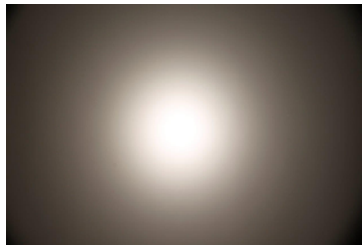

SEOUL SEMICONDUCTOR
 LED ZC25/40/60
 FWHM / FWTM 24.0° / 69.0°
 Efficiency 77 %
 Peak intensity 2.4 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 F13671_ANGE-RZ-LENS
 BJB: 47.319.2030

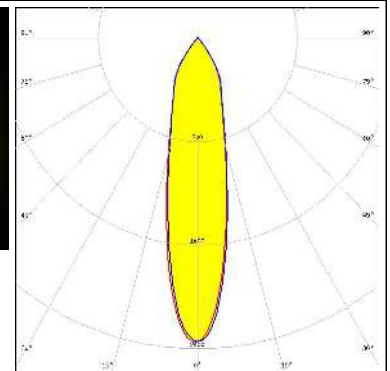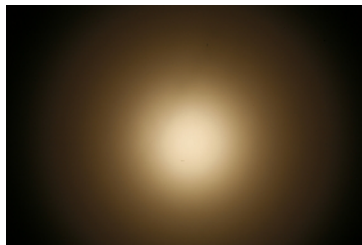



OPTICAL RESULTS (MEASURED):

<p> SEOUL SEMICONDUCTOR</p> <p>LED ZC25/40/60 FWHM / FWTM 21.0° / 68.0° Efficiency 81 % Peak intensity 2.7 cd/lm LEDs/each optic 1 Light colour White Required components: A.A.G. STUCCHI: 8102-G2</p>		
<p> SEOUL SEMICONDUCTOR</p> <p>LED ZC25/40/60 FWHM / FWTM 23.0° / 68.0° Efficiency 81 % Peak intensity 2.7 cd/lm LEDs/each optic 1 Light colour White Required components: BJB: 47.319.2030</p>		
<p>SHARP</p> <p>LED Mega Zenigata (GW6DME) FWHM / FWTM 17.0° / 63.0° Efficiency 83 % Peak intensity 3.6 cd/lm LEDs/each optic 1 Light colour White Required components: A.A.G. STUCCHI: 8301-G2</p>		
<p>SHARP</p> <p>LED Mega Zenigata (GW6DME) FWHM / FWTM 17.0° / 61.0° Efficiency 84 % Peak intensity 3.7 cd/lm LEDs/each optic 1 Light colour White Required components: BJB: 47.319.2011</p>		

OPTICAL RESULTS (MEASURED):



TRIDONIC

LED SLE G7 LES17 H
 FWHM / FWTM 17.0° / 66.0°
 Efficiency 80 %
 Peak intensity 3.3 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

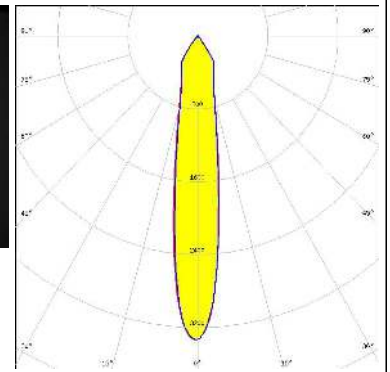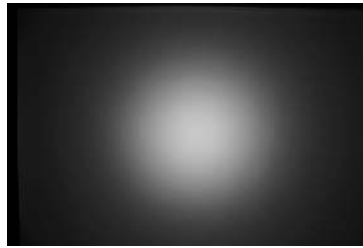



TRIDONIC

LED SLE G7 LES21 H
 FWHM / FWTM 20.0° / 68.0°
 Efficiency 80 %
 Peak intensity 2.8 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:

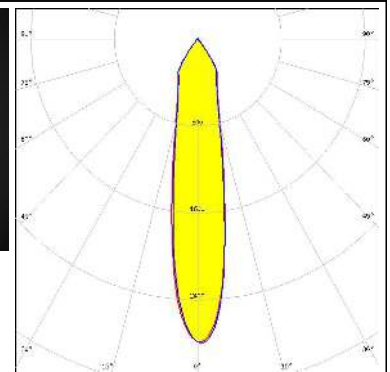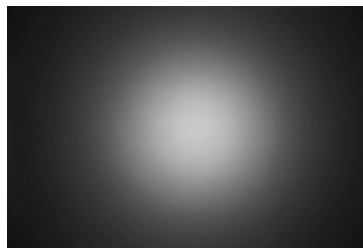



XICATO

LED XOB 14.5 mm
 FWHM / FWTM 17.0° / 66.0°
 Efficiency 82 %
 Peak intensity 3.4 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2021

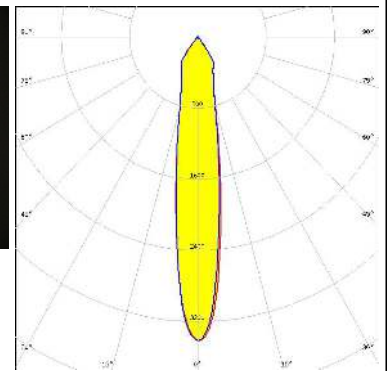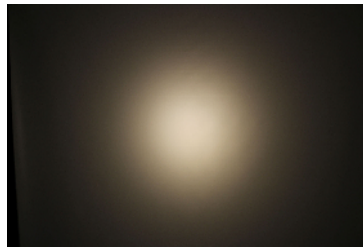

XICATO


LED XTM - 19mm LES
 FWHM / FWTM 19.0° / 68.0°
 Efficiency 81 %
 Peak intensity 3.1 cd/m
 LEDs/each optic 1
 Light colour White
 Required components:
 C15743_XTM-ADAPTER-50-B

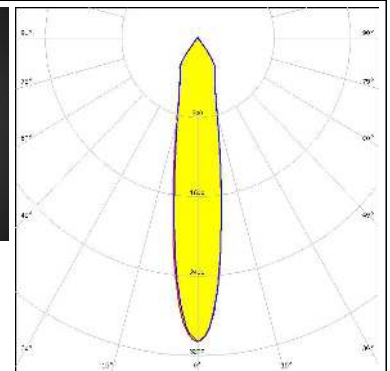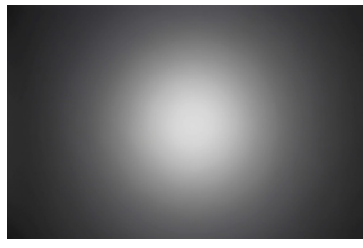

OPTICAL RESULTS (SIMULATED):

CITIZEN


LED CLU730/731/733
 FWHM / FWTM 16.0° / 26.0°
 Efficiency 91 %
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2030

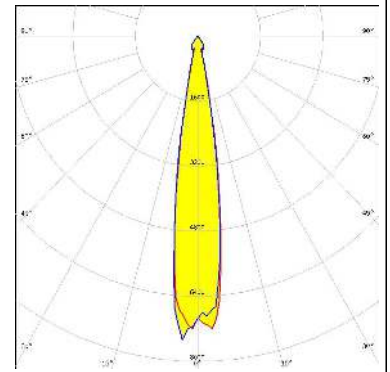

OSRAM


Opto Semiconductors

LED Soleriq S15
 FWHM / FWTM 18.0° / 30.0°
 Efficiency 90 %
 Peak intensity 6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2021

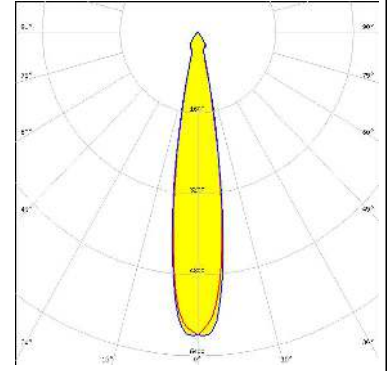

SAMSUNG

LED LC040D / LC060D / LC080D
 FWHM / FWTM 23.0° / 45.0°
 Efficiency 87 %
 Peak intensity 3.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 BJB: 47.319.2030

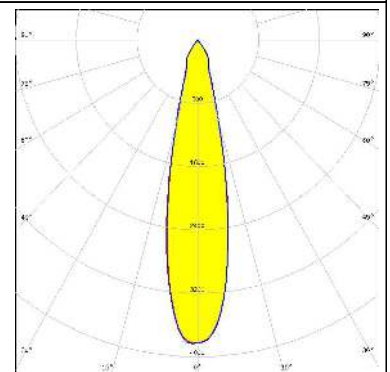

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)