

Approved	Checked	Designed	DEVELOPMENT SPECIFICATION				
		<i>X. Gamao</i>		P/N: LN J 2 0 6 R 5 R U X			

T Y P E	Red Light Emitting Diode					
A P P L I C A T I O N	Indicators					
M A T E R I A L	GaP					
O U T L I N E	Attached					
A B S O L U T E M A X I M U M R A T I N G S	P	※ I <sub>FP</sub>	I <sub>FDc</sub>	V <sub>R</sub>	Topr	Tstg
	60	60	20	4	-25~+85	-30~+100
	mW	mA	mA	V	°C	°C
C O N D I T I O N	T <sub>a</sub> = 25 ± 3 °C					


T e s t   S p e c i f i c a t i o n

I t e m	S y m b o l	C o n d i t i o n	T y p	L i m i t		U n i t
				Min	Max	
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 10 mA	2.03		2.6	V
Reverse Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 4 V			10	μA
Luminous Intensity	I <sub>O</sub>	I <sub>F</sub> = 10 mA · DC	0.4	0.15		mcd
Peak Emission Wavelength	λ <sub>p</sub>	I <sub>F</sub> = 10 mA · DC	700			nm
Spectral Line Half Width	Δλ	I <sub>F</sub> = 10 mA · DC	100			nm

- ※ · The Condition of I<sub>FP</sub> is duty 10 %, Pulse width 1 ms
- Please contact the Panasonic local office if you design at low current (below 1 mA DC) or pulse current operation and have any questions.

NOTE

1. Compositions of the lead ... Cu/Ni/Au plating
2. Soldering conditions.  
Refer to Handling note.
3. Care should be taken that soldering is done within 3-days after opening the dry package and reel.
4. Package: Light red diffusion type.
5. Circuit to operate LED.

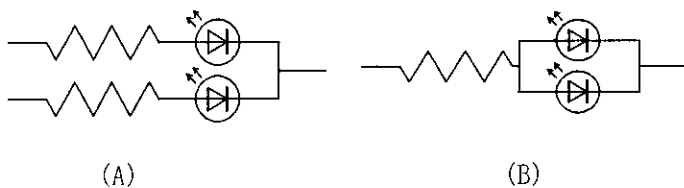

- (A) Recommended circuit.
- (B) The difference of brightness between the LED could be found due to the V<sub>F</sub> characteristics of each LED.





Oct. 27. 2001			

Approved Checked Designed

DEVELOPMENT SPECIFICATION

*X. Ozawa*


P/N:LNJ206R5RUX

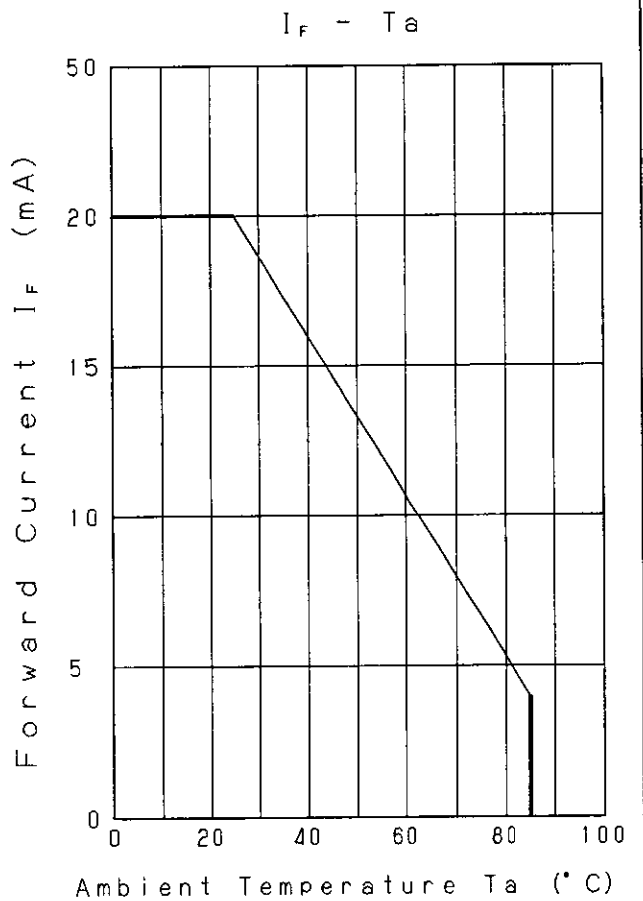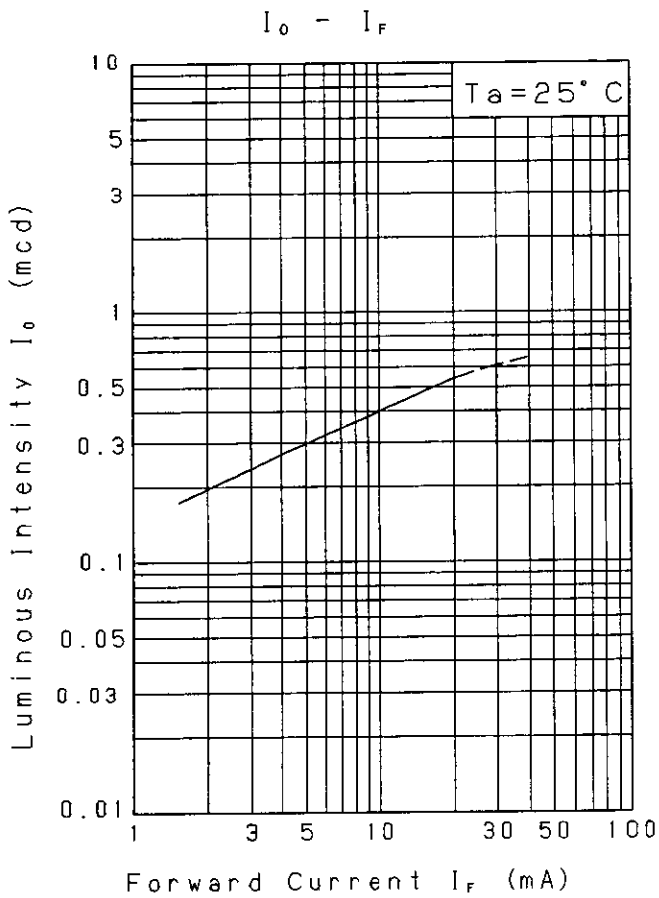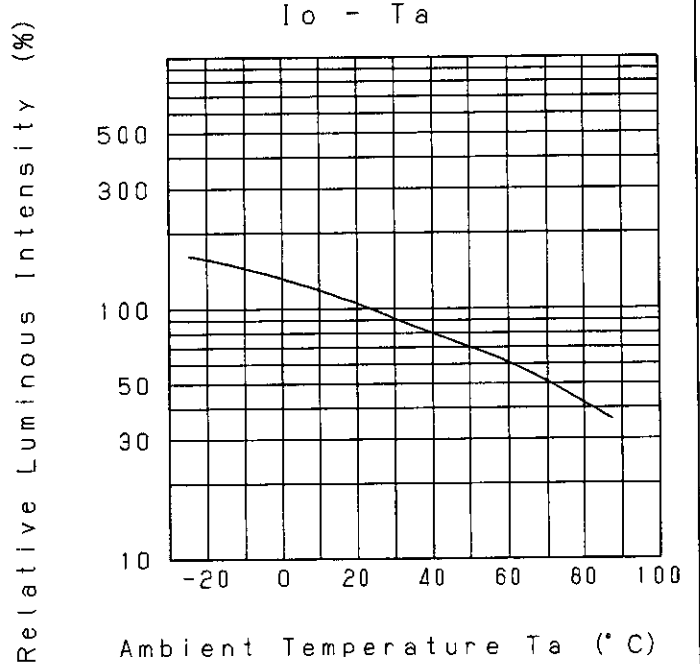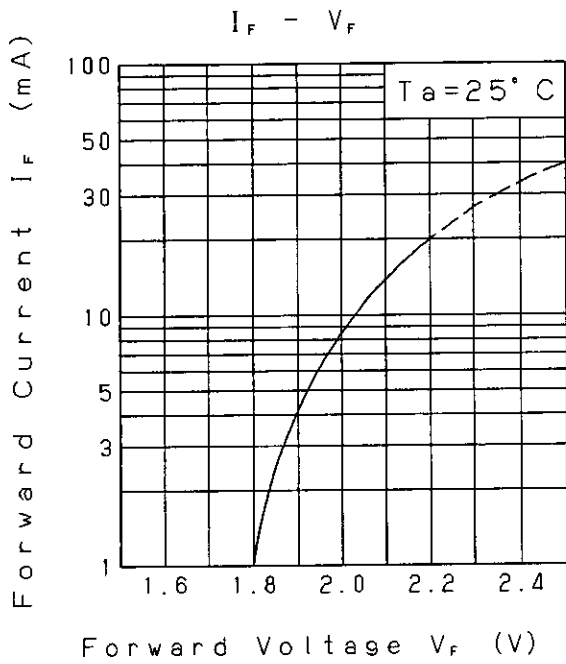


Oct. 27. 2001

Approved	Checked	Designed	DEVELOPMENT SPECIFICATION			
		<i>K. Ohtani</i>	P/N: LNJ206R5RUX			

Relative Luminous Intensity  
Wavelength Characteristics

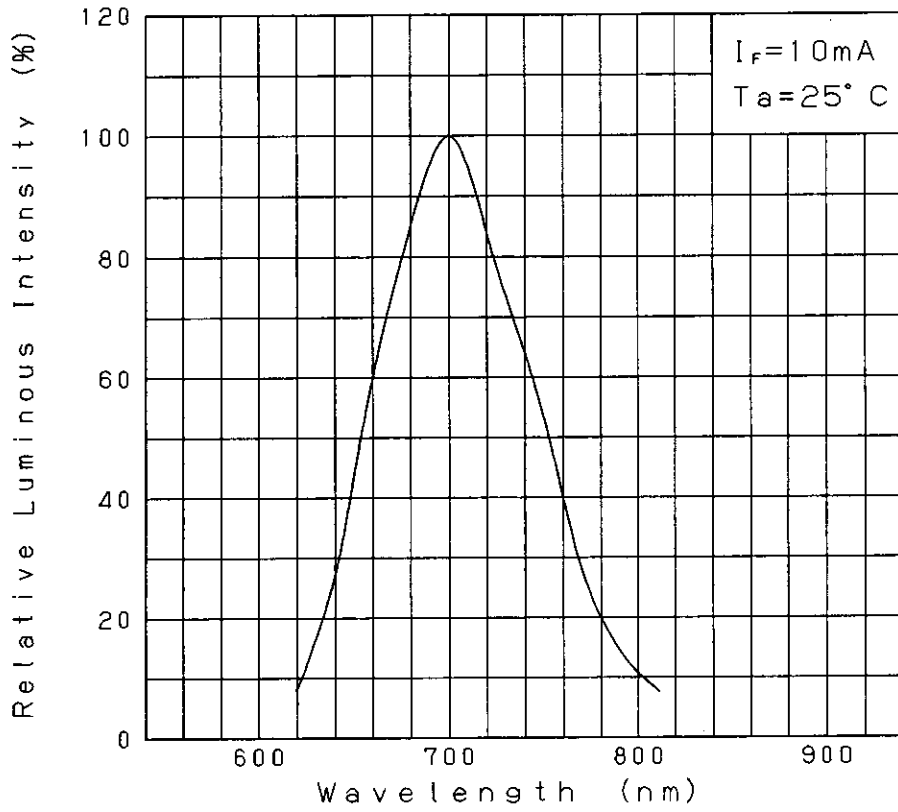



Directive Characteristics

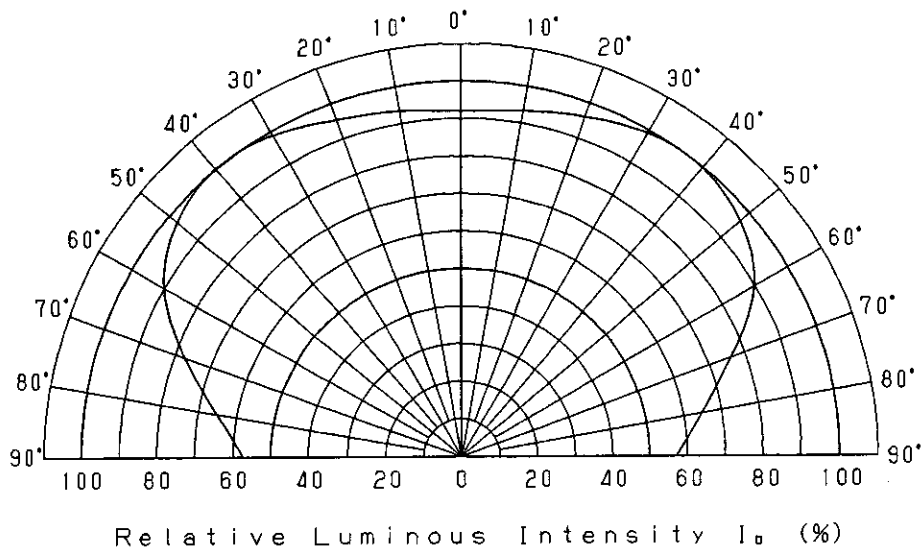

Oct. 27. 2001			

Approved <i>M. Yamashita</i>	Checked <i>T. Shoda</i>	Designed <i>T. Tabata</i>
---------------------------------	----------------------------	------------------------------

DEVELOPMENT SPECIFICATION  
(OUTLINE)  
P/N :

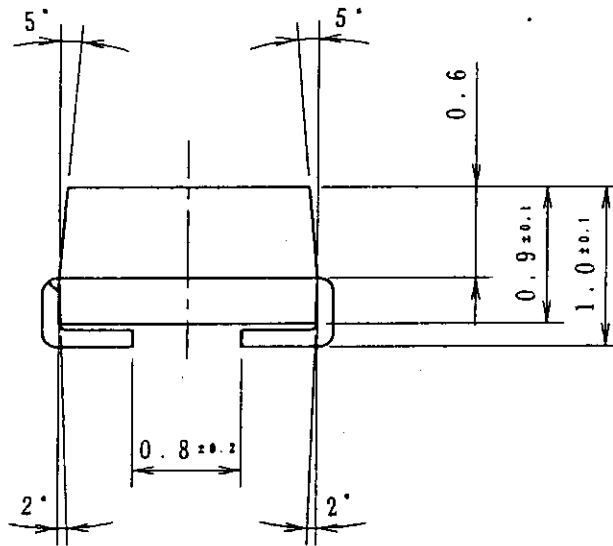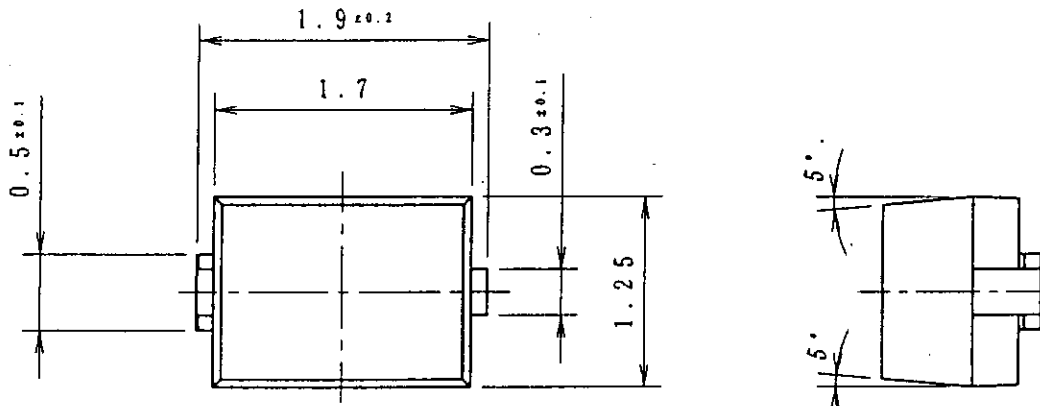

(NOTE)

1. Unit:mm
2. Tolerance unless specified is  $\pm 0.2$ .
3. Measurement of the package doesn't include gate projection.
4. Corner of the package is R 0.2max.
5. Projection's tolerance of the package is 0.2max.

Nov. 27. 1996