

т	۵	н п	m	0



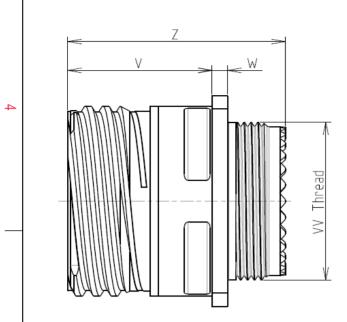

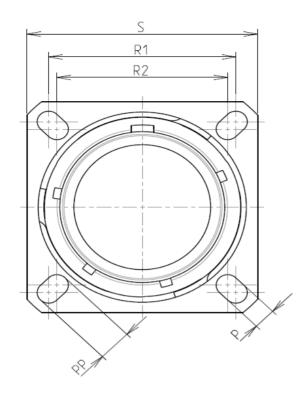

Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

SHELL TYPE : Square Flange Receptacle

PLATING : X = Without Plating

Н

CONTACT TYPE : Standard Crimp Contact

-Mass

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

2	-Shell Material	: Composite
	-Shell Plating	: Without Plating
	-Insulator	: Thermoplastic
	-Contacts	: Copper Alloy
	-Seals & Grommet	: Silicon Elastomer
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum
	-Durability	: 500 Mating cycles
	-Delivered with Souriau	contacts and Accessories
	-Temperature Range	65℃ to +175℃

: 2000 hours

: 10.1 g ± 10%

8D 0

G

11

Х

98


А

F

Ν

Connector dimension		
Dim	Nominal	
Р	3.25±0.2	
РР	4.93±0.2	
R1	20.62	
R2	18.26	
S	26.2±0.3	
V	20.83+0/-1.25	
W	2.1/2.5	
Z	31.5 Max	
VV THREAD	M15x1-6g	

Е

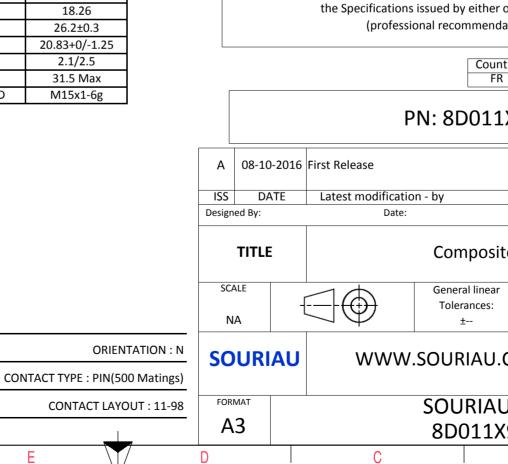

D

0		Φ		A		
						4
LAY	YOUT SHOWN AS EXA	AMPLE				3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) $\frac{Country \qquad Jurisdiction \& Control List \\\hline FR \qquad Not Listed}$ PN: 8D011X98AN						2
rst Release Latest modificatio	n - hy				MOD N°	
Date:				DRAWING		
Composite Receptacle 8D series						
10	General linear Tolerances:		NPRDS / PI 859			
This document is the			nent is the prop SOURIAU ot be reproduce	ed or	1	
SOURIAU DRG N° SHEET						
С	8D011X9	SAN-C			1/2	
		В		А		,

		۵	٣	m	D	0	
		Contact Layout					Panel Cutout
4	-×($ \begin{array}{c} & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & & \\ & & & \\ & & & \\ & & & \\ & & & & \\ & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & \\ & & & & $			Å	SQUARE FLANGE RECEPTACLE (TY REAR MOUNTING	
	Cont posit ID A B C C D E F F Shell Arrangement Numb size no. conta 11 -98 6	tion X.avis Y-avis (mm) (mm) (mm) A +.000 (0.00) +.130 (3.30) 3 +.130 (3.30) +.000 (0.00) 2 +.065 (1.65) 113 (2.87) 0 065 (1.65) 113 (2.87) 2 +.000 (0.00) +.000 (0.00) = 130 (3.30) +.000 (0.00) = +.000 (0.00) +.000 (0.00) = 000 (0.00) +.000 (0.00)]		¥ 		ØT
ى ن	11 -98 6	5 20 I All MS20050-98]				Dim ØA ØAA R1 ØT
						the Specifications is	f the Products whi ssued by either of
N							Country FR N: 8D011X
	_				A 08-10-20 ISS DATE Designed By:	16 First Release Latest modification Date:	- by
-					SCALE NA		General linear Tolerances: ±
				- T	FORMAT A3		SOURIAU.CO SOURIAU 8D011X9
	Н	l G	F	E	D	C	I

