

MOS FET Relays

G3VM-353H/H1

**Analog-switching MOS FET Relay with SPST-NC
(Single-pole, Single-throw, Normally Closed)
Contacts. General-purpose Series Added.**

- New models in 350 load voltage with SPST-NC contacts and a 6-pin SOP package. General-purpose (high On-Resistance) series added.
- Continuous load current of 120 mA.
- Dielectric strength of 1,500 Vrms between I/O.
- RoHS Compliant.



NEW

Note: The actual product is marked differently from the image shown here.

■ Application Examples

- Broadband systems
- Measurement devices and Data loggers
- Amusement machines



■ List of Models

| Contact form | Terminals | Load voltage (peak value) | Model | Number per stick | Number per tape |
|--------------|----------------------------|---------------------------|----------------|------------------|-----------------|
| SPST-NC | Surface-mounting terminals | 350 VAC | G3VM-353H | 75 | --- |
| | | | G3VM-353H1 | | --- |
| | | | G3VM-353H(TR) | --- | 2,500 |
| | | | G3VM-353H1(TR) | | --- |

■ Dimensions

Note: All units are in millimeters unless otherwise indicated.


G3VM-353H/H1

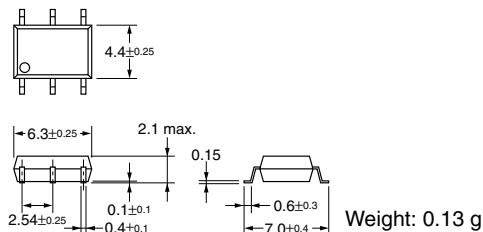

Note: The actual product is marked differently from the image shown here.


■ Terminal Arrangement/Internal Connections (Top View)

G3VM-353H/H1



■ Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-353H/H1




■ Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

| Item | Symbol | Rating | Unit | Measurement conditions |
|--|-------------------------------------|---------------------------|-------------|--|
| Input | LED forward current | I_F | 50 | mA |
| | Repetitive peak LED forward current | I_{FP} | 1 | A 100 μs pulses, 100 pps |
| | LED forward current reduction rate | $\Delta I_F/\text{°C}$ | -0.5 | $\text{mA}/\text{°C}$ $T_a \geq 25^\circ\text{C}$ |
| | LED reverse voltage | V_R | 5 | V |
| | Connection temperature | T_j | 125 | $^\circ\text{C}$ |
| Output | Load voltage (AC peak/DC) | V_{OFF} | 350 | V |
| | Continuous load current | I_O | 120 (90) | mA |
| | | | 120 (90) | |
| | | | 240 (180) | |
| | ON current reduction rate | $\Delta I_{ON}/\text{°C}$ | -1.2 (-0.9) | $\text{mA}/\text{°C}$ $T_a \geq 25^\circ\text{C}$ |
| | | | -1.2 (-0.9) | |
| | | | -2.4 (-1.8) | |
| | Connection temperature | T_j | 125 | $^\circ\text{C}$ |
| Dielectric strength between input and output (See note 1.) | | V_{I-O} | 1,500 | V_{rms} AC for 1 min |
| Operating temperature | | T_a | -40 to +85 | $^\circ\text{C}$ With no icing or condensation |
| Storage temperature | | T_{stg} | -55 to +125 | $^\circ\text{C}$ With no icing or condensation |
| Soldering temperature (10 s) | | --- | 260 | $^\circ\text{C}$ 10 s |

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Connection Diagram

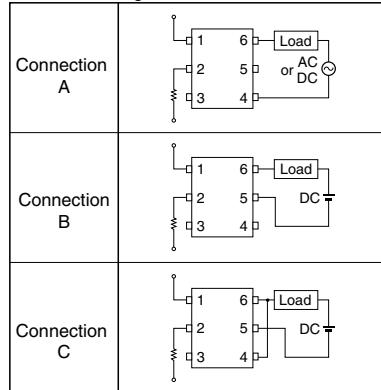

Values inside parentheses () are for G3VM-353H1

■ Electrical Characteristics ($T_a = 25^\circ\text{C}$)

| Item | Symbol | Minimum | Typical | Maximum | Unit | Measurement conditions |
|--------------------------------|---|------------|---------|----------------|-----------|---|
| Input | LED forward voltage | V_F | 1.0 | 1.15 | 1.3 | V $I_F = 10 \text{ mA}$ |
| | Reverse current | I_R | --- | --- | 10 | μA $V_R = 5 \text{ V}$ |
| | Capacity between terminals | C_T | --- | 30 | --- | pF $V = 0, f = 1 \text{ MHz}$ |
| | Trigger LED forward current | I_{FT} | --- | 1.0 | 3.0 | mA $I_{OFF} = 10 \mu\text{A}$ |
| Output | Maximum resistance with output ON | R_{ON} | --- | 15 (27) | 25 (50) | Ω $I_O = 120 \text{ mA}$ |
| | | | --- | 8 (20) | 14 (43) | Ω $I_O = 120 \text{ mA}$ |
| | | | --- | 4 (10) | --- | Ω $I_O = 240 \text{ mA}$ |
| | Current leakage when the relay is open | I_{LEAK} | --- | 0.0105 (0.003) | 1.0 | μA $V_{OFF} = 350 \text{ V}, I_F = 5 \text{ mA}$ |
| | Capacity between terminals A Connection | C_{OFF} | --- | 65 (30) | --- | pF $V = 0, f = 1(100) \text{ MHz}, I_F = 5 \text{ mA}$ |
| Capacity between I/O terminals | | C_{I-O} | --- | 0.8 | --- | pF $f = 1 \text{ MHz}, V_s = 0 \text{ V}$ |
| Insulation resistance | | R_{I-O} | 1,000 | --- | --- | $M\Omega$ $V_{I-O} = 500 \text{ VDC}, R_{OH} \leq 60\%$ |
| Turn-ON time | | t_{ON} | --- | 0.15 (0.25) | 1.0 (0.5) | ms $I_F = 5 \text{ mA}, R_L = 200 \Omega, V_{DD} = 20 \text{ V}$ (See note 2.) |
| Turn-OFF time | | t_{OFF} | --- | 0.7 (0.5) | 3.0 (1) | ms |

Values inside parentheses () are for G3VM-353H1


■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.

| Item | Symbol | Minimum | Typical | Maximum | Unit |
|--------------------------------------|----------|---------|---------|----------|------------------|
| Load voltage (AC peak/DC) | V_{DD} | --- | --- | 280 | V |
| Operating LED forward current | I_F | 5 | --- | 25 | mA |
| Continuous load current (AC peak/DC) | I_O | --- | --- | 120 (90) | mA |
| Operating temperature | T_a | -20 | --- | 65 | $^\circ\text{C}$ |


Values inside parentheses () are for G3VM-353H1

Note: 2. Turn-ON and Turn-OFF Times




■ Engineering Data


G3VM-353H

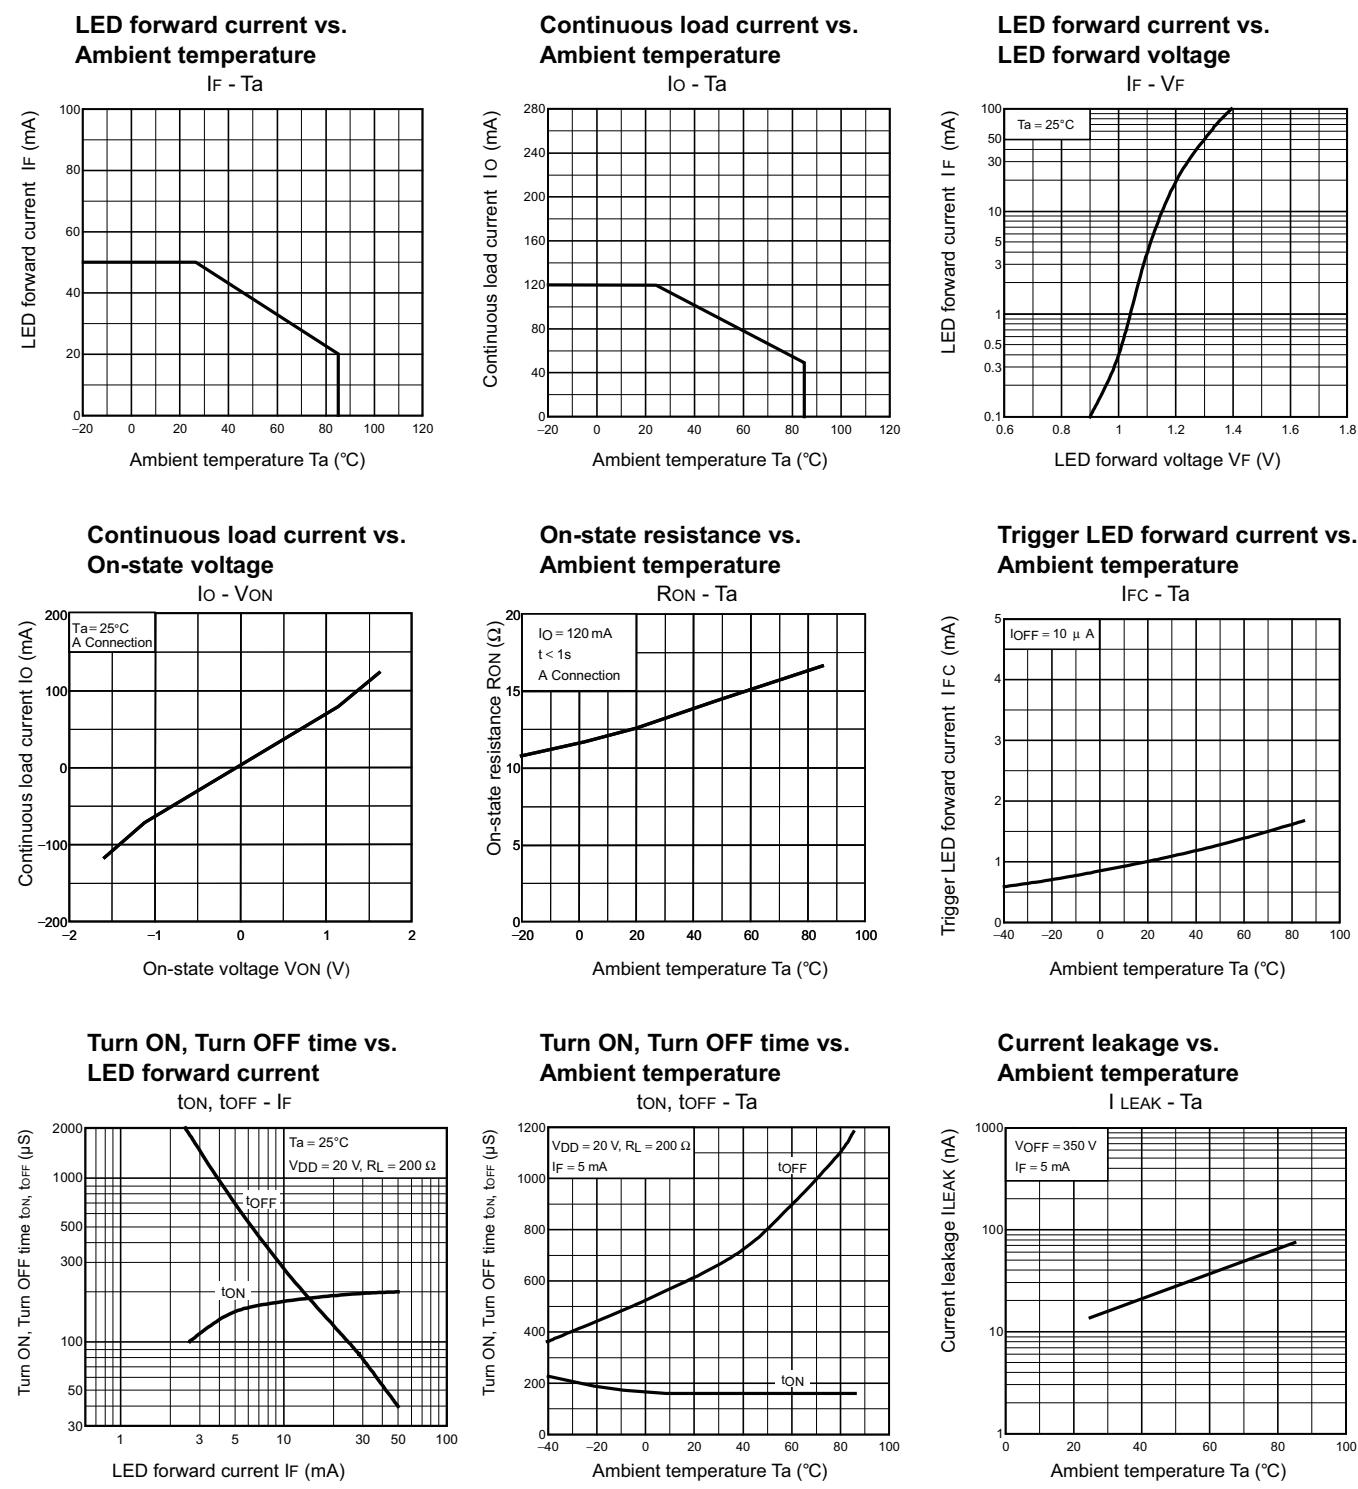

■ Engineering Data

G3VM-353H1

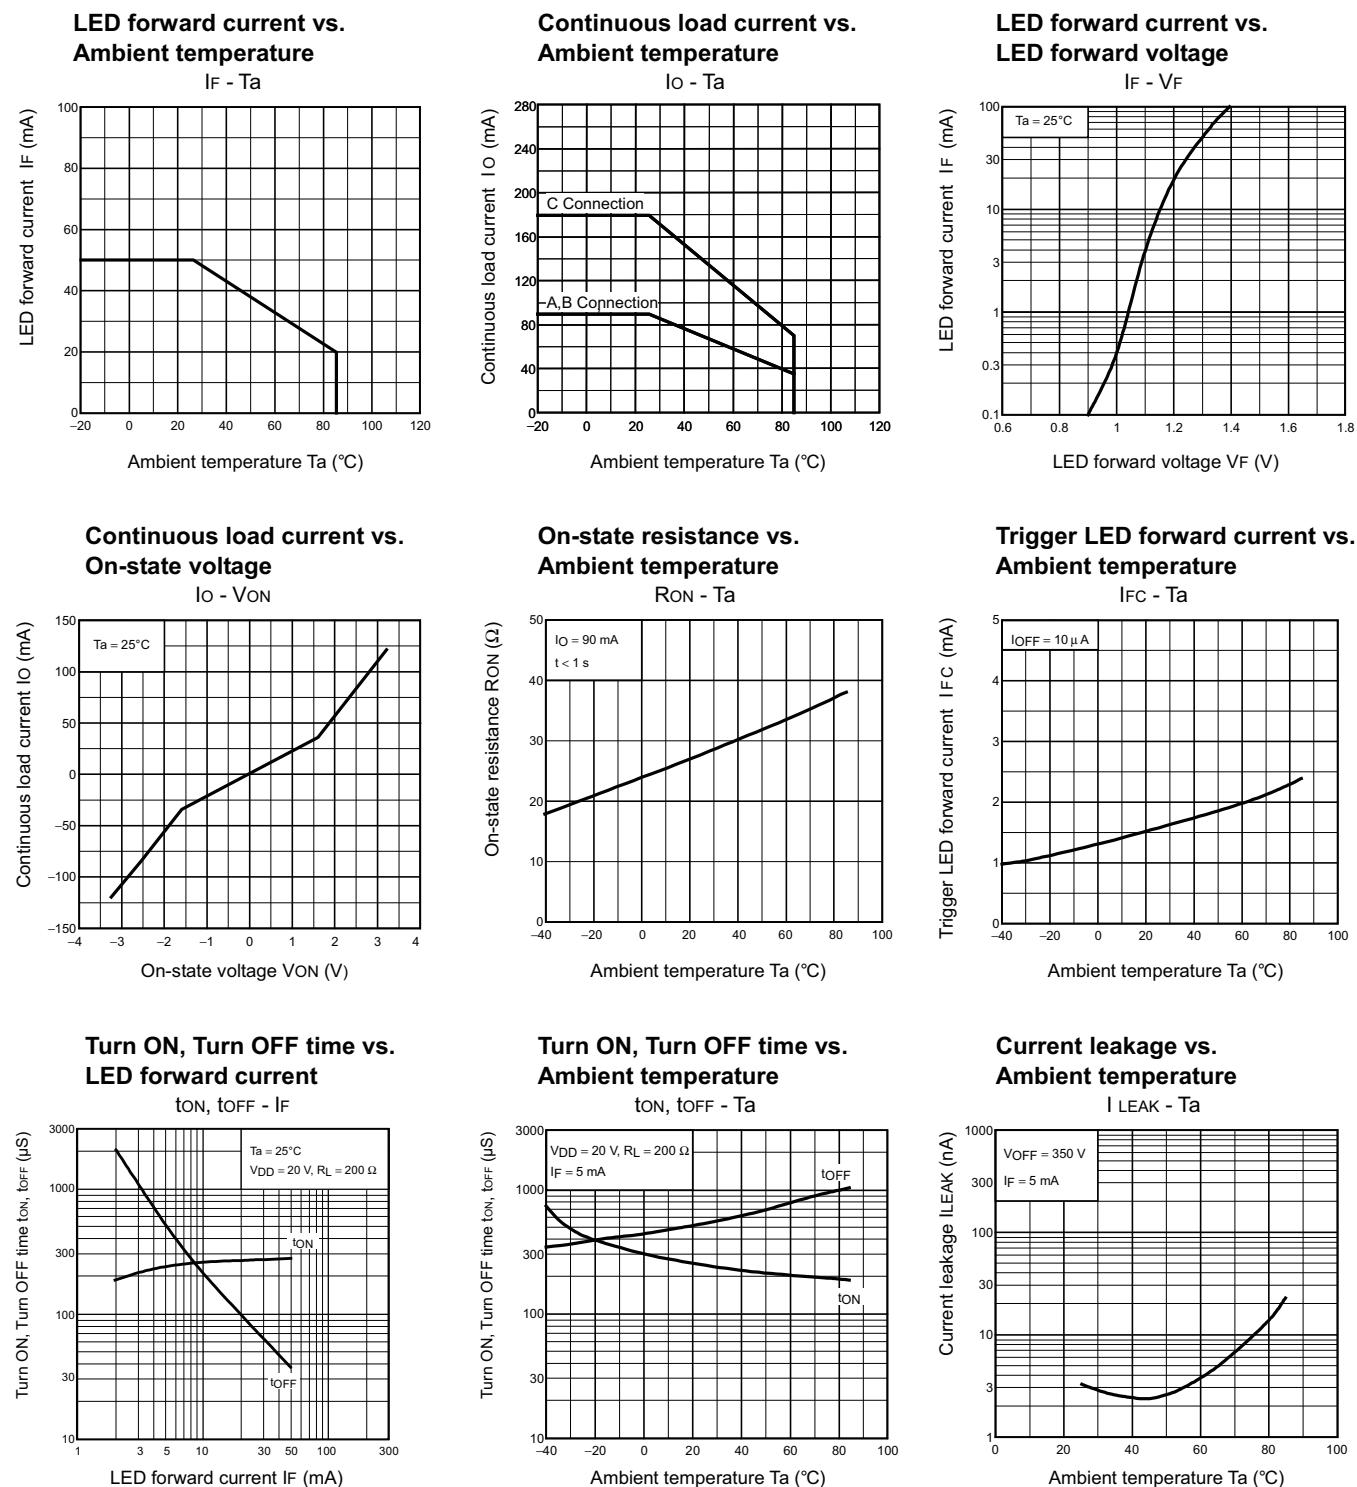

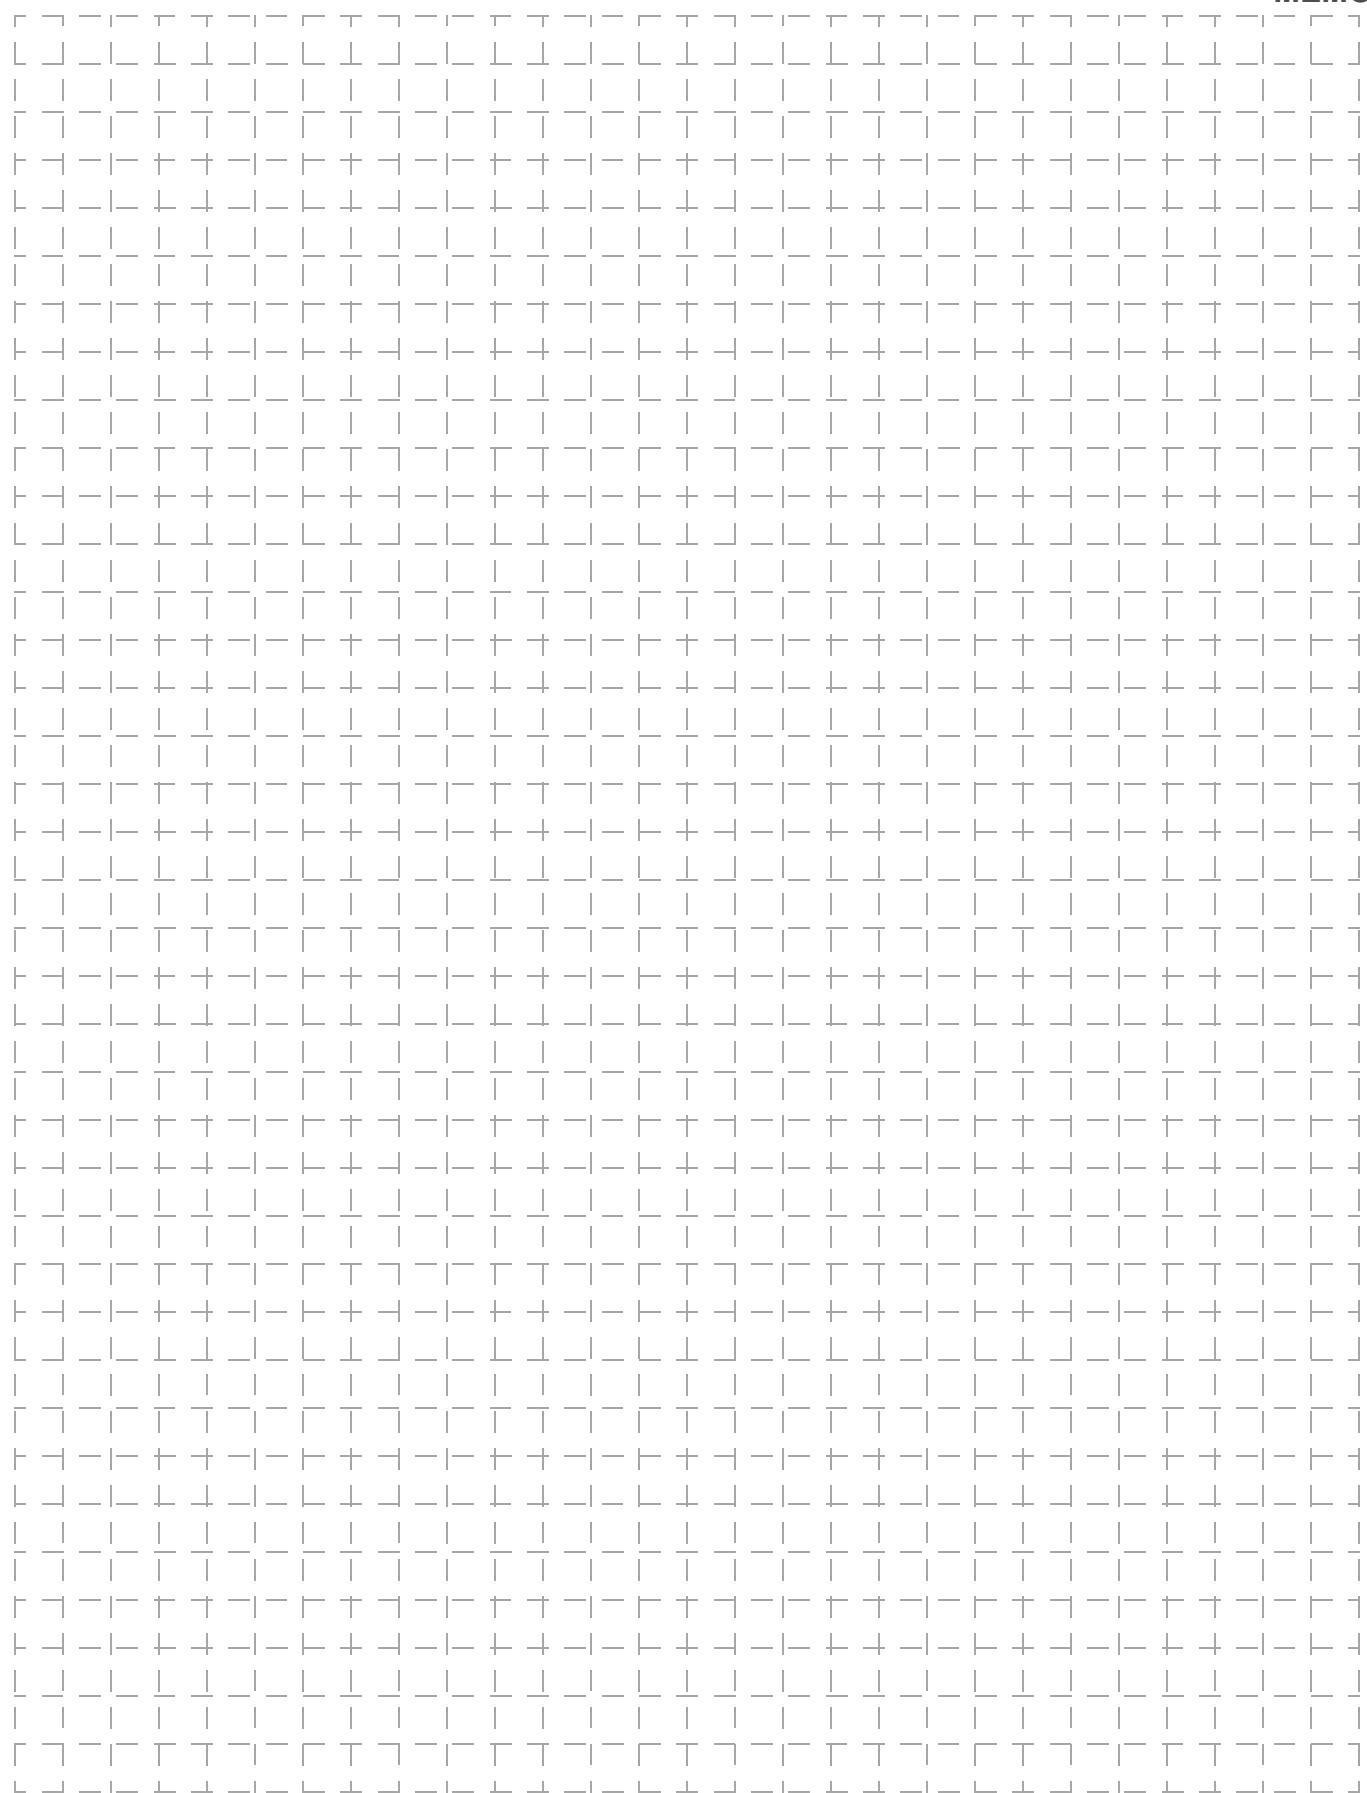

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.



**OMRON ELECTRONIC
COMPONENTS LLC**
55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

Cat. No. X302-E-1

12/10

Specifications subject to change without notice

OMRON ON-LINE

Global - <http://www.omron.com>
USA - <http://www.components.omron.com>

Printed in USA