Alle Rechte vorbehalten/ *All rights reserved*

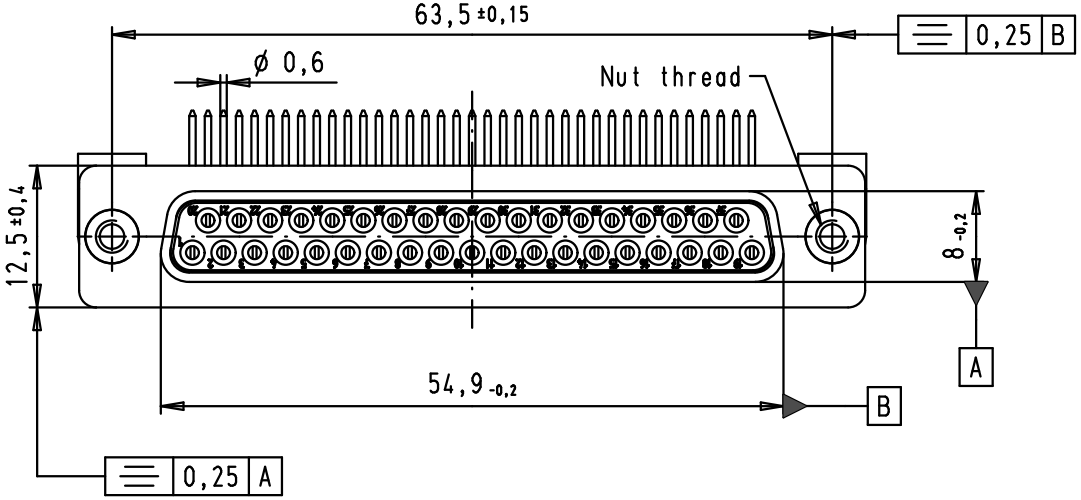

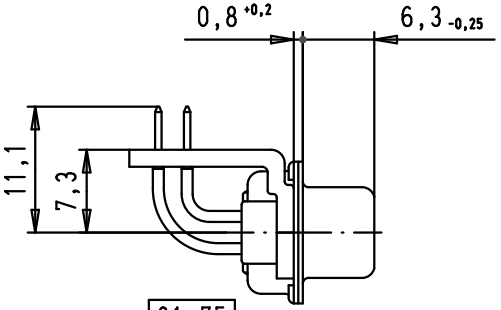

SPECIFICATIONS

Mating cycles	500
Filter type	C
Capacitance	1000 pF±20%
Working voltage	100 V
Current rating	7,5 A
Insulation resistance	>1 GΩ

FREQUENCY (MHz)	ATTENUATION (dB)
5	1
10	3
50	12
100	20
500	34
1000	30

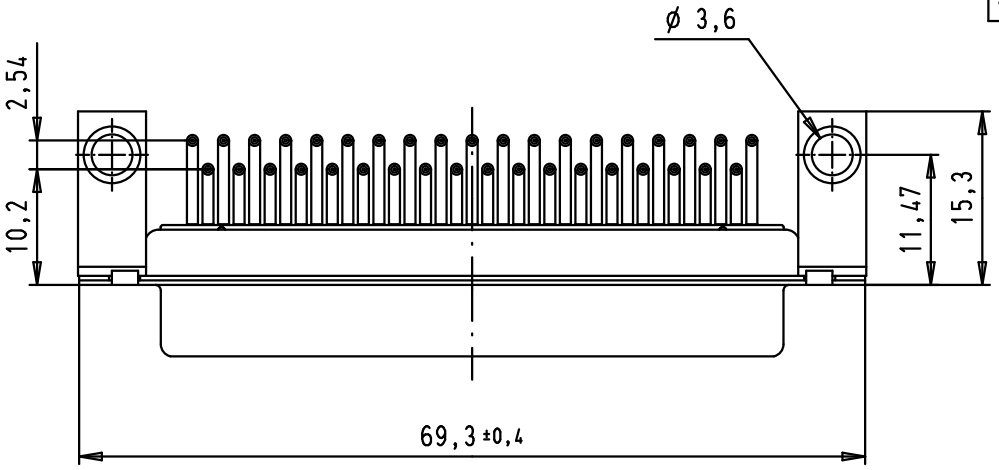

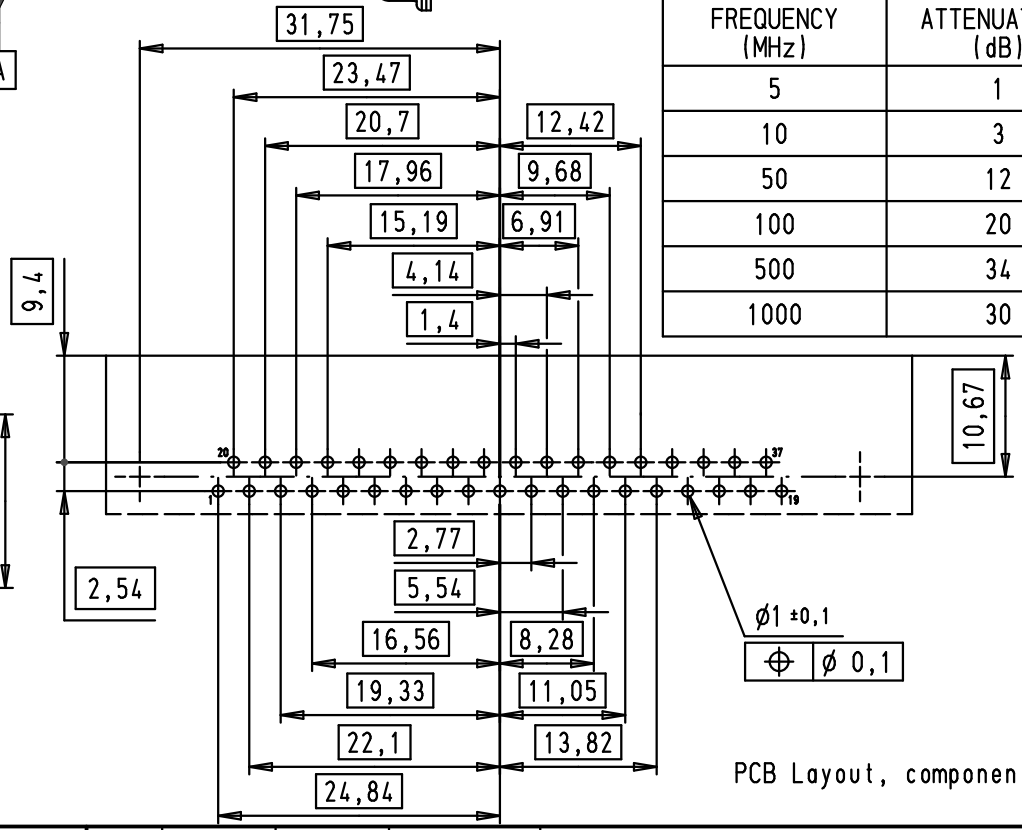

PCB Layout, component side

				Dat.	Name
			Detail.	08/07/02	CV
			Insp.		
35391	13/10/08	PK	Stand.		
31864	23/01/04	AF			
31058	08/07/02	CV			
Mod.	Dat.	Name			

All Dim. in mm
Orig. Size DIN A 4

D-Sub, female, angled, 37 poles, turned solder pins, clinch nuts and brackets with holes

Maßstab/ *Scale* 1,5:1

HARTING EURL
F-95972 Paris

TB 09 64 414 723X

Sub.

Blatt/ *Page* 3/4

Part number	Nut thread
09 64 414 7236	4-40 UNC-2B
09 64 414 7237	M3