



UNIT:mm

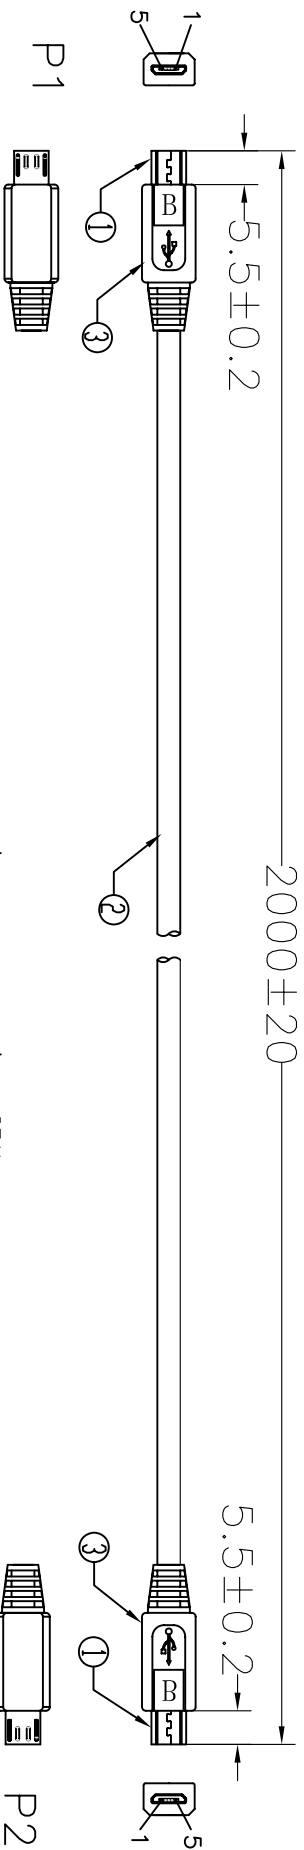

PIN ASSIGNMENT	
P1	P2
1	1
2	2
3	3
5	5
SHELL	SHELL

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 10Mohm(min)
 4. dielectric test: DC 300V

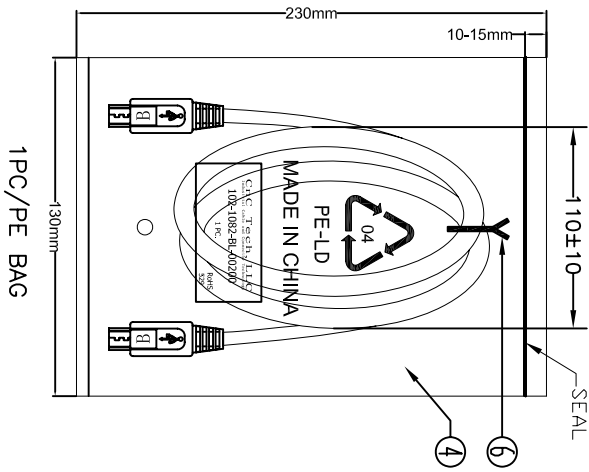

NO.	TIE	Q'TY	NAME
⑥	1	1	BLACK L=80mm
⑤	1/10	1	CLEAR SIZE: 280*330*0.05mm PRINT BLACK*MADE IN CHINA*+10PCS*及印生产周期,有透气孔.
④	1	1	CLEAR SIZE: 130*230*0.05mm PRINT BLACK*MADE IN CHINA*+1PC*及印生产周期,有透气孔.
③	12g	1	BLACK PVC-40P (MOULD NO:MM-116)
②	1	1	USB2.0 UL2725 [28AWG(7/0.12TC+AL)*1P+28AWG(7/0.12TC)*2C]+AEB(48B TC) JACKET:BLACK OD:3.5mm L=2000±10mm
①	2	2	MICRO USB 5P B/M SOLDER TYPE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK

CNC Tech, LLC			
Industrial Cable and Connector Technology			
DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	102-1082-BL-00200
DECIDED		DATE	2012-02-16
VERSIONS/EDITION	A/0	PROJECTION	

4

3

2

1

A

B

C

D

A

B

C

D