



Electrical specifications

Center Frequency: 200MHz
Passband: 196-204MHz
Passband Variation: ≤ 2.0 dB
VSWR Over Passband: ≤ 3 dB
Rejection: ≥ 60 dB@150MHz
Rejection 2: ≥ 60 dB@300MHz
Rejection 3: ≥ 60 dB up to 400MHz
Rejection 4: ≥ 50 dB up to 3000MHz
Impedance: 50 Ω


Mechanical

Mounting Method: Drop-in
Dimensions: 2.00" x 0.70" x 0.70"

Environmental

Operating Temperature: -45°C to +85°C
Storage Temperature: -55°C to +100°C

Outline Drawing:

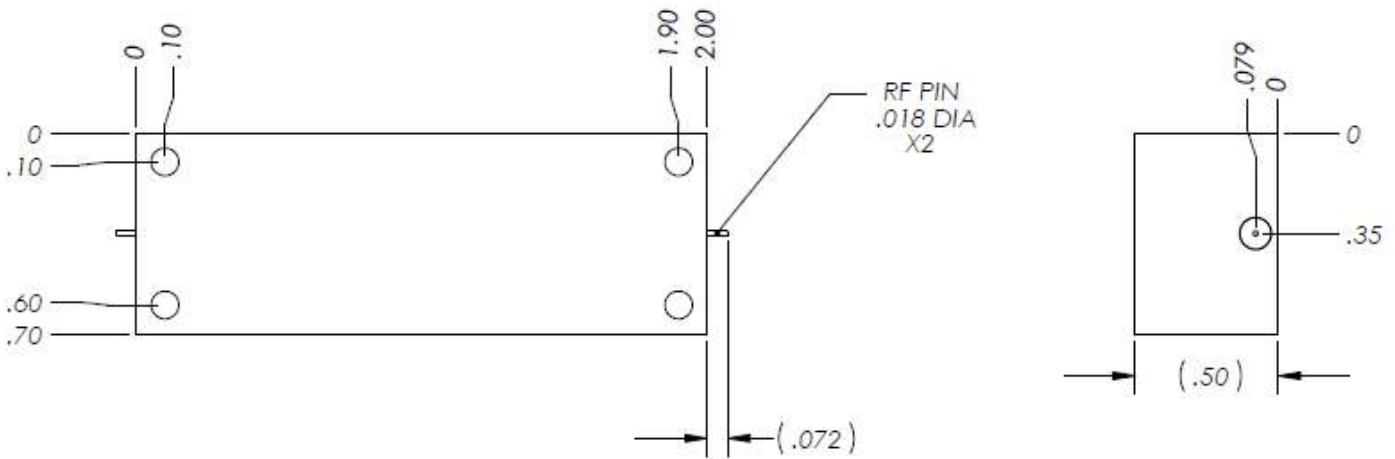



Plot:

