



|                              |   |
|------------------------------|---|
| <b>Order Code</b>            | <b>TCK-150</b>                          |
| <b>Inductance</b>            | 68 $\mu$ H $\pm$ 20% (at 100 kHz / 1 V) |
| <b>Impedance (DCR)</b>       | 636 m $\Omega$ max.                     |
| <b>Rated Current</b>         | 0.59 A max.                             |
| <b>Operating Temperature</b> | -40°C to +125°C                         |
| <b>RoHS Exemptions</b>       | No Exemptions                           |




### Impedance Curve

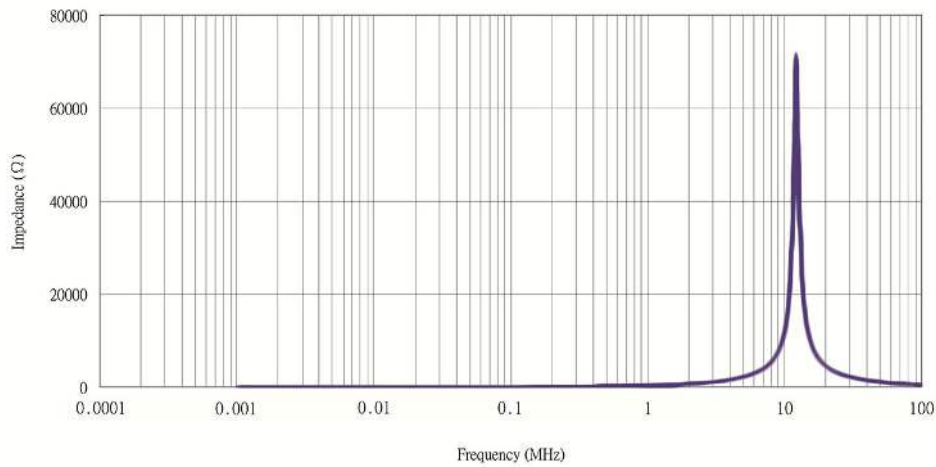

### Outline Dimensions

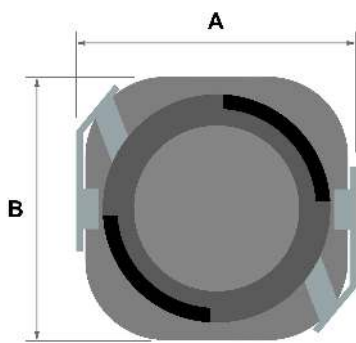

| Dimensions [mm] |               |
|-----------------|---------------|
| <b>A</b>        | 5.3 $\pm$ 0.4 |
| <b>B</b>        | 5.0 $\pm$ 0.4 |
| <b>C</b>        | 2.7 $\pm$ 0.5 |
| <b>D</b>        | 2             |
| <b>E</b>        | 2             |
| <b>F</b>        | 2             |

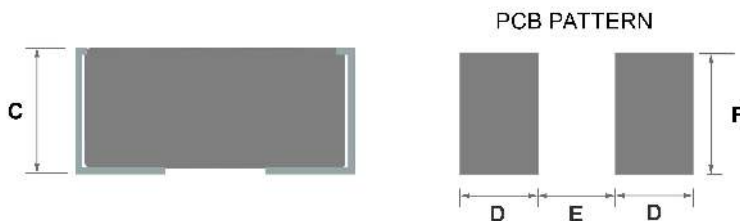

All specifications valid at +25°C, unless otherwise stated.