



## 8 Way SMA Power Divider from 500 MHz to 2 GHz Rated at 30 Watts

### Power Dividers Technical Data Sheet

PE20DV011

#### Features

- 8-Way Power Divider
- Reactive Design
- 500 MHz to 2 GHz Frequency Range
- Max Power 30W (CW)
- Isolation > 20 dB

#### Applications

- Test and Measurement
- Military Communications
- Commercial Communications
- Wireless Communications
- SATCOM

#### Description

Pasternack carries a wide selection of power dividers to fit your needs. These components are essential in many systems, allowing the combination of multiple signals or splitting of a single signal into multiple signals with equal magnitude and phase. Pasternack's resistive and reactive power dividers come with excellent performance featuring minimal loss, high isolation and low VSWR. They are available in both narrow and broad bandwidths with a variety of connector types. The PE20DV011 is an 8 way reactive power divider that operates from 500 MHz to 2 GHz and can handle up to 30 Watts (CW). This SMA power divider offers 20 dB min isolation and 1.4:1 max VSWR. The package interface uses SMA inputs on all of the ports.

#### Electrical Specifications

Design: Reactive  
 Number of Output Ports: 8

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.5		2	GHz
Impedance		50		Ohms
Input VSWR			1.4:1	
Output VSWR			1.3:1	
Insertion Loss			10.5	dB
Isolation	20			dB
Amplitude Balance			±0.4	dB
Phase Balance			±4	Degrees
Input Power (CW)			30	Watts

Electrical Specification Notes:  
 Values at +25°C, sea level.  
 Insertion loss includes 9dB theoretical loss.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [8 Way SMA Power Divider from 500 MHz to 2 GHz Rated at 30 Watts PE20DV011](#)



## 8 Way SMA Power Divider from 500 MHz to 2 GHz Rated at 30 Watts

### Power Dividers Technical Data Sheet

PE20DV011

#### Mechanical Specifications

##### Size

Length	4.25 in [107.95 mm]
Width	4.06 in [103.12 mm]
Height	0.39 in [9.91 mm]

##### Configuration

Input Connector	SMA Female
Output Connectors	SMA Female

#### Environmental Specifications

##### Temperature

Operating Range	-55 to +85 deg C
-----------------	------------------

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

8 Way SMA Power Divider from 500 MHz to 2 GHz Rated at 30 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [8 Way SMA Power Divider from 500 MHz to 2 GHz Rated at 30 Watts PE20DV011](#)

URL: <https://www.pasternack.com/8-way-sma-power-divider-2-ghz-pe20dv011-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE20DV011 CAD Drawing

8 Way SMA Power Divider from 500 MHz to 2 GHz Rated at 30 Watts

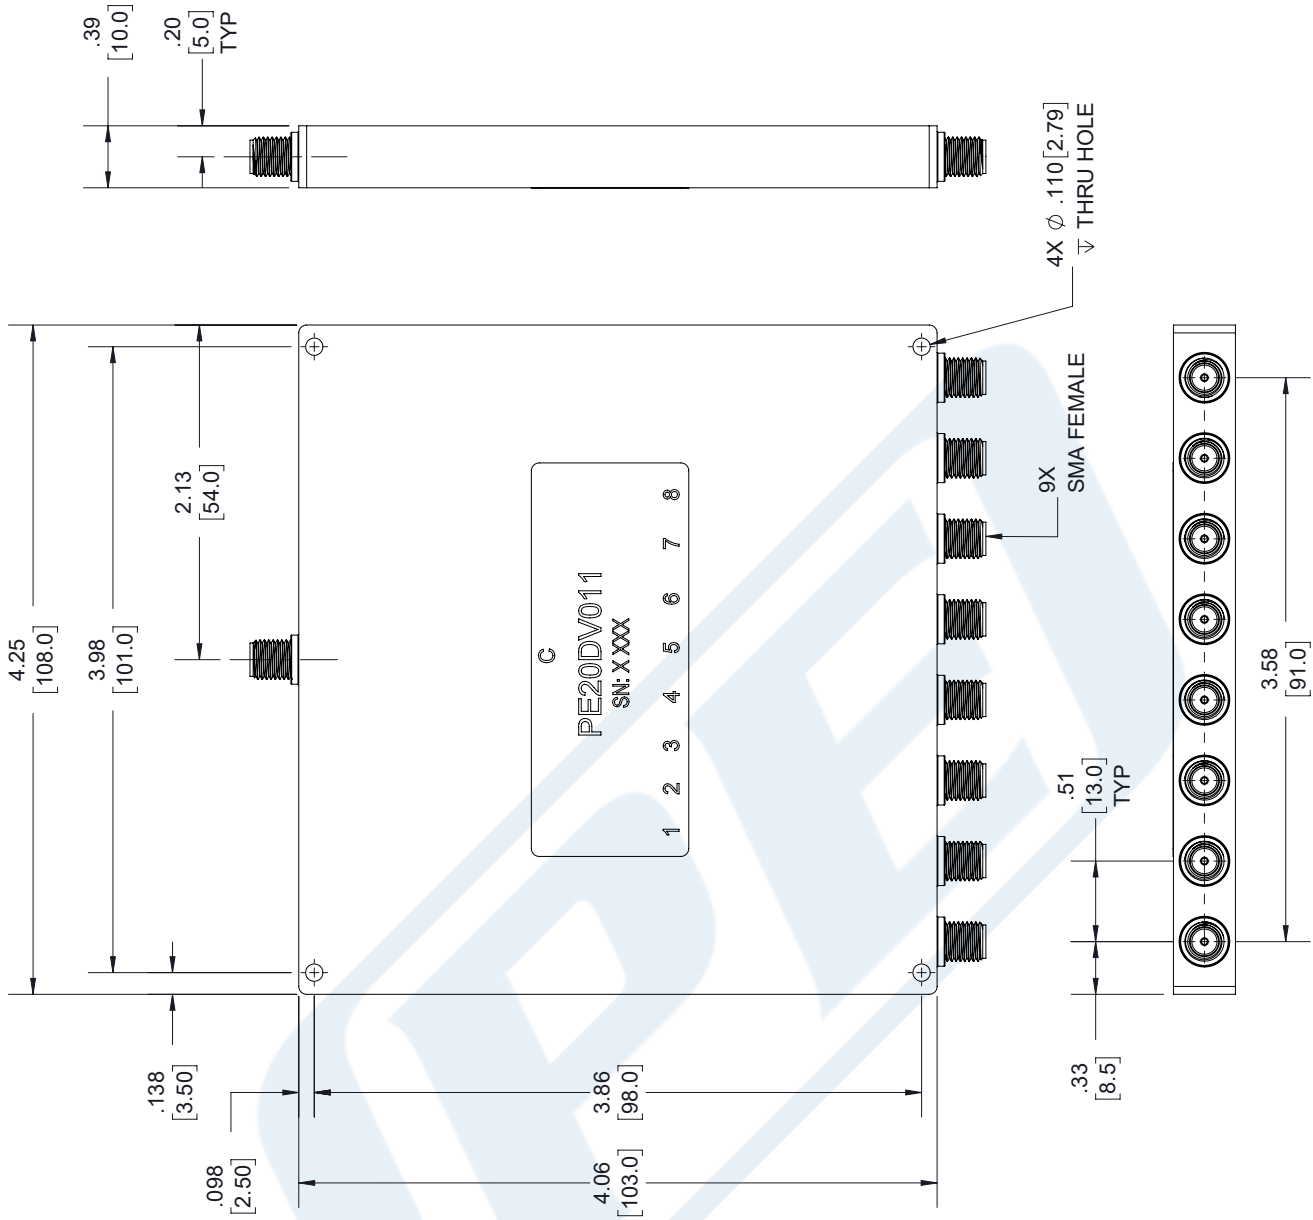

C  
PE20DV011  
SN: XXXX  
1 2 3 4 5 6 7 8

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

DWG TITLE <b>PE20DV011</b>	NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].		
	CAD FILE	SCALE	SIZE
CAGE CODE	07/19/18	N/A	A
53919			7361

DWG TITLE <b>PE20DV011</b>
CAGE CODE <b>53919</b>


**PASTERNAK®**  
 THE ENGINEER'S RF SOURCE  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com