

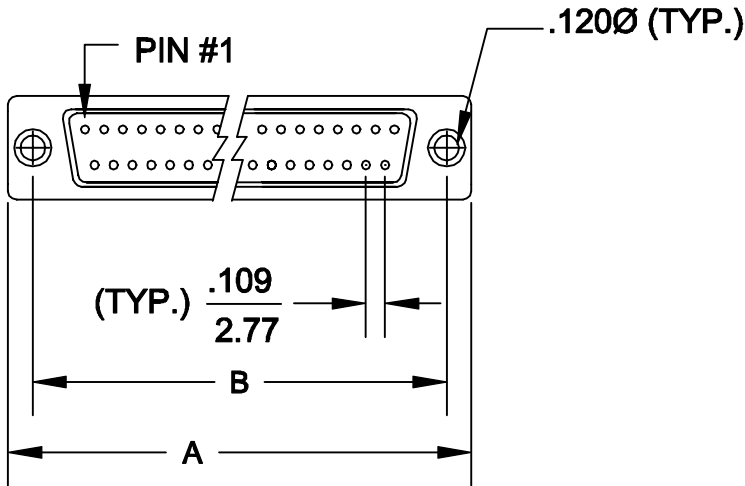


**DESCRIPTION: PLASTIC FLAT RIBBON CONNECTOR**

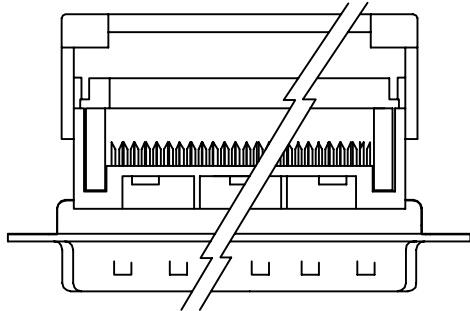

	A	B	C
9	1.213 30.81	.984 25.00	.707 17.96
15	1.541 39.14	1.312 33.33	.707 17.96
25	2.088 53.04	1.852 47.04	.707 17.96
37	2.729 69.32	2.500 63.50	.707 17.96

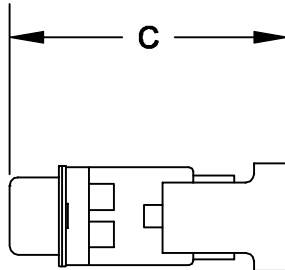

186-XXX-192-XX1

**SERIES** \_\_\_\_\_

**POSITIONS** \_\_\_\_\_

009  
015  
025  
037  
050

**GENDER** \_\_\_\_\_

1 = MALE  
2 = FEMALE

**TERMINATION** \_\_\_\_\_

9 = IDC

**SHELL PLATING** \_\_\_\_\_

2 = TIN

**HARDWARE OPTIONS** \_\_\_\_\_

00 = NO HARDWARE  
55 = 4-40 INSERTS

**PLATING OPTIONS** \_\_\_\_\_

01 = GOLD FLASH


**SPECIFICATIONS:**

**MATERIALS:**

INSULATOR: UL 94V-0 RATED PBT  
+30% FIBER-GLASS OR NYLON-66

**ELECTRICALS:**

CURRENT RATING: 1 AMP  
CONTACT RESISTANCE: 15 mOHMS MAX  
INSULTOR RESISTANCE: 1000 MOHMS MIN  
VOLTAGE: 500V AC FOR 1 MINUTE  
TEMPERATURE: -50°C TO +100°C

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: <b>WAYNE ROBBINS</b>	DATE: <b>9-28-98</b>
			CHECKED:	DATE:
<b>NorComp</b>		SCALE: 1:1	SHEET <b>1</b> OF <b>1</b>	REV <b>1</b>
		DWG NO. <b>186-XXX-192-XX1</b>		