



Electrical Specifications

Center Frequency: 300 MHz
3 dB Bandwidth: 7 MHz
Passband: 296.5-303.5 MHz
Insertion Loss at Center: 5.0 dB Max
VSWR in BW: 1.5:1 Max
In/Out Impedance: 50 Ω
Ripple: 0.5 dB Max
Rejection: 45 dB @ 288 MHz
45 dB @ 312 MHz
Power Handling: 25 W Max


Mechanical

Connector Type: BNC (F)
Dimensions: 2.38 x 1.0 x 1.0 Inches

Environmental

Operating Temperature: -40 to +85° C
Storage Temperature: -50 to +95° C

Outline Drawing:

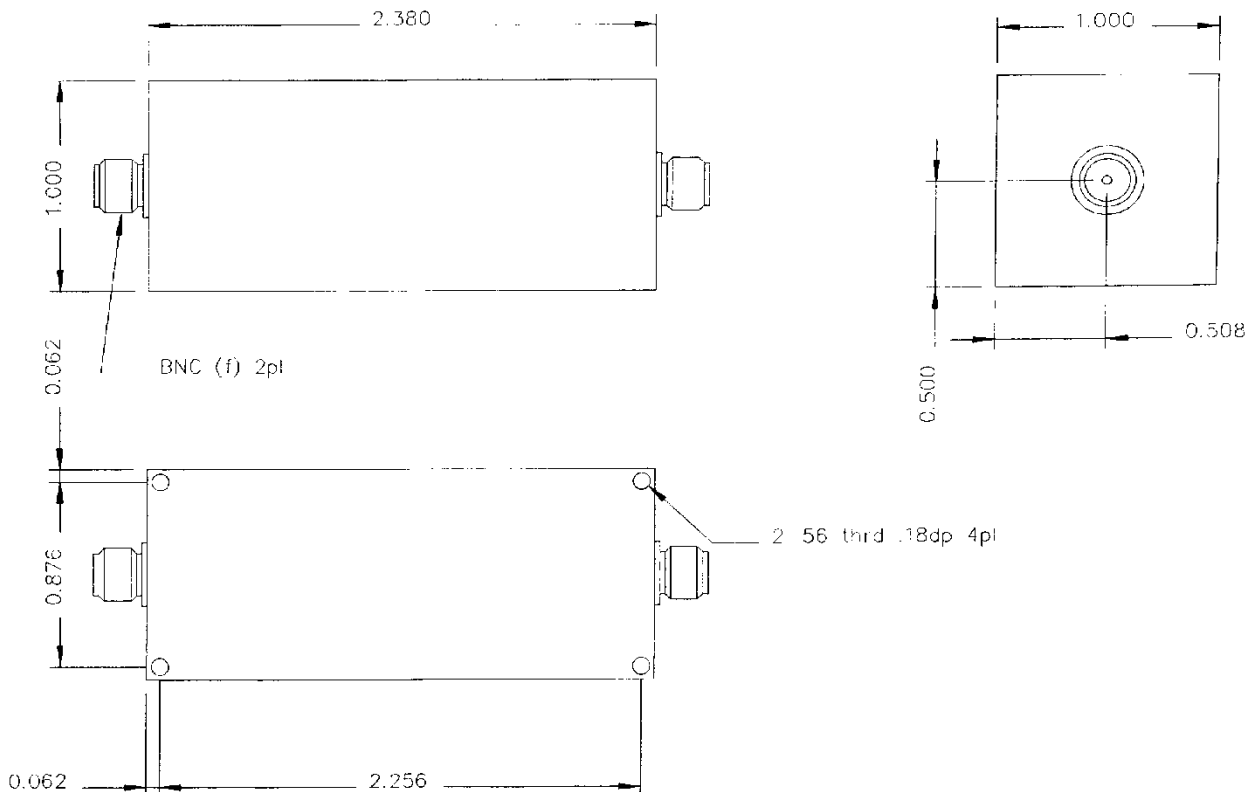



Response Plot:

