
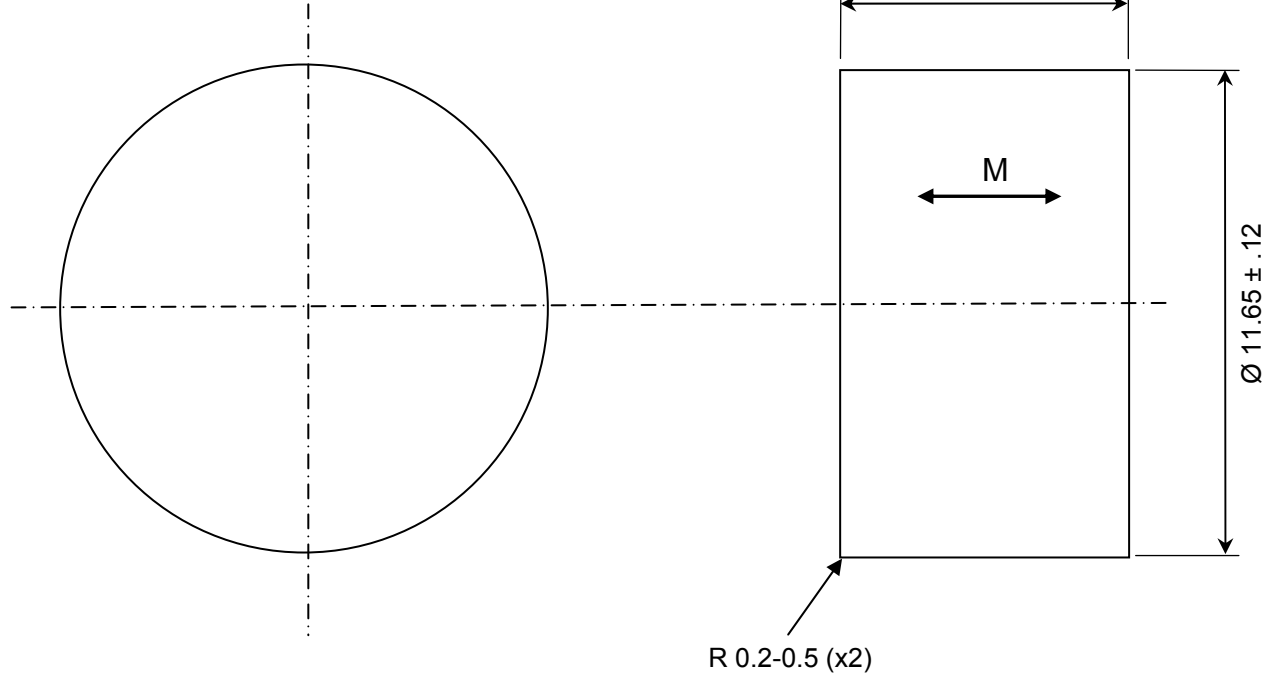


**CONFIDENTIAL & PROPRIETARY INFORMATION**

This document contains Confidential and Proprietary Information of Alliance LLC, and all design, manufacturing, reproduction, use, and sale rights of such information are expressly reserved

ALL DIMENSIONS ARE IN MM



**NOTES:**

- MAGNET PROPERTIES PER N-40UH:  
 Br: 12,500-13,200 G  
 Hc: 11,500-12,200 Oe  
 Hci: ≥25,000 Oe  
 T max: 180 C
- SUPPLIED MAGNETIZED THROUGH THE THICKNESS
- PARTS ARE NICKEL PLATED FOR 15hrs SALT SPRAY MIN.



REV	DESCRIPTION	DATE	BY
B	Changed CAD, incl cert, 3D	2/20/14	BT

TOLERANCES  
(UNLESS OTHERWISE NOTED)

DECIMAL      METRIC  
 X.XX = ± .01    X.X = ± .25  
 X.XXX = ± .005   X.XX = ± .13

ANGLES  
 ± .5°

DO NOT SCALE DRAWING

<b>Alliance LLC</b>		
1450 CLARK DRIVE, VALPARAISO, INDIANA 46385		
DESCRIPTION: 11.65 mm x 8.60 mm DISC MAGNET		
<b>PROXIMITY SENSOR MAGNET</b>		<b>P/N: ALC1186</b>
GRADE: N-40UH	Drwg by: BT	REV LEVEL: B
COATING: Nickel	Appr by: DV	Appr. Dated: 12-11-2013