


RoHS Compliant

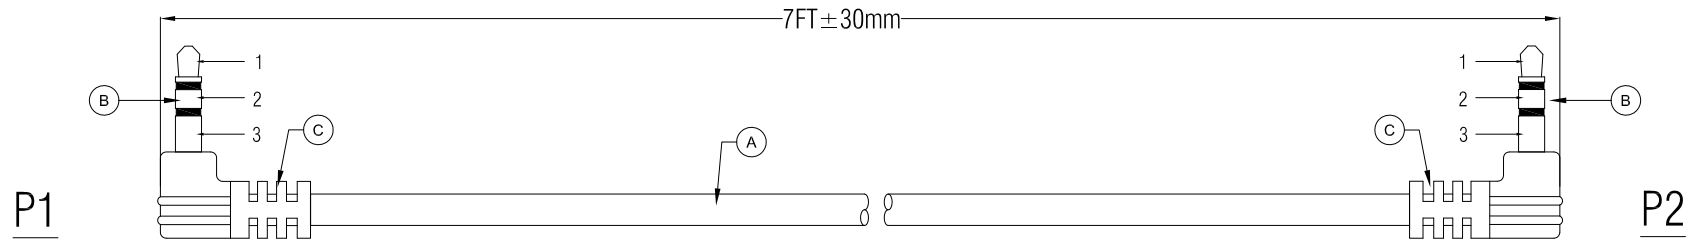

WIRE ADDRESS

<u>P1</u>		<u>P2</u>
1	WHITE	1
2	RED	2
3	SPIRAL SHIELD	3

Electrical Test:

- 1.100% TEST OPEN SHORT MIS-WIRE.
- 2.CONTACT RESISTANCE:3Ω MAX.
- 3.INSULATION RESISTANCE:5MΩ MIN.
- 4.HI-POT:300V DC/10MS.

D		
C		
B		
VER.A	REVISE	DATE

**3.5mm Stereo M/M Right Angle 7FT**

Item			
Draw	Kobe	Date: 2022.03.08	
Approval	608-024RR-007		
Duty	F16	BOM.NO:XXXX	
Sample NO.	FIRST220303	Drawings of 1 (1) Proportion: 1:1 Unit(mm)	

C		45P PVC BLACK		G	
B	1	Z-608-024RR2.3-7	Ø3.5mm STEREO PLUG(3Pole Nickel Plated)	2	PCS
A			NON-UL 28#*2C+S, BLACK PVC JACKET	1	PCS
NUMBER	BOM.NO	PRODUCT SPECIFICATIONS		Quantity	Unit