

NOTES:

MATERIAL
 ⑥ 1. Insulator Material: PA9T+30%GF (UL94V-0), Black
 2. Contact Material : Brass
 3. Contact Plating : Gold flash Over 50µ"Ni

ELECTRICAL

- 1. Current Rating : 1.5AMP
- 2. Withstand Voltage : 500V AC/DC
- 3. Contact Resistance : 20mΩ max
- 4. Insulation Resistance : 1000MΩ min

ENVIRONMENTAL
 1. Operation Temperature: -40°C to +105°C
 2. Packing: Tube

Order Information :

④ xx: 06, 10, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50, 60

RoHS compliant
 Unit: mm

 File No.: E198287 ③

Scale	Free	⑥	Add the soldering profile & Change the material to PA9T	22.03.2016	Winnie
TOLERANCE		⑤	Update the packing	25.02.2014	Amy
X.X	±0.40	④	Add 06 poles version into the drawing	08.02.2014	Amy
X.XX	±0.25	③	Add UL-File No	12.12.2013	Winnie
X.XXX	±0.15	②	Update	29.06.2009	Dean
Angle°	±3°	①	Drawn	25.01.2006	Alex
			Id.		Name



Customer-No.	Date	Name
	25.01.2006	Alex
	22.03.2016	Winnie

ASSMANN WSW-No.	AWHW2 XXA-0202
Drawing-No.	
Replace	ASS 2318 CO rev06
	Sheet 1/2

A	1	2	3	4	5	6	7	A
B	1	2	3	4	5	6	7	B
C	1	2	3	4	5	6	7	C
D	1	2	3	4	5	6	7	D
E	1	2	3	4	5	6	7	E
F	1	2	3	4	5	6	7	F
G	1	2	3	4	5	6	7	G
H	1	2	3	4	5	6	7	H

1

2

3


4

5

6

7

SMT Type Product Past IR Reflow Graph

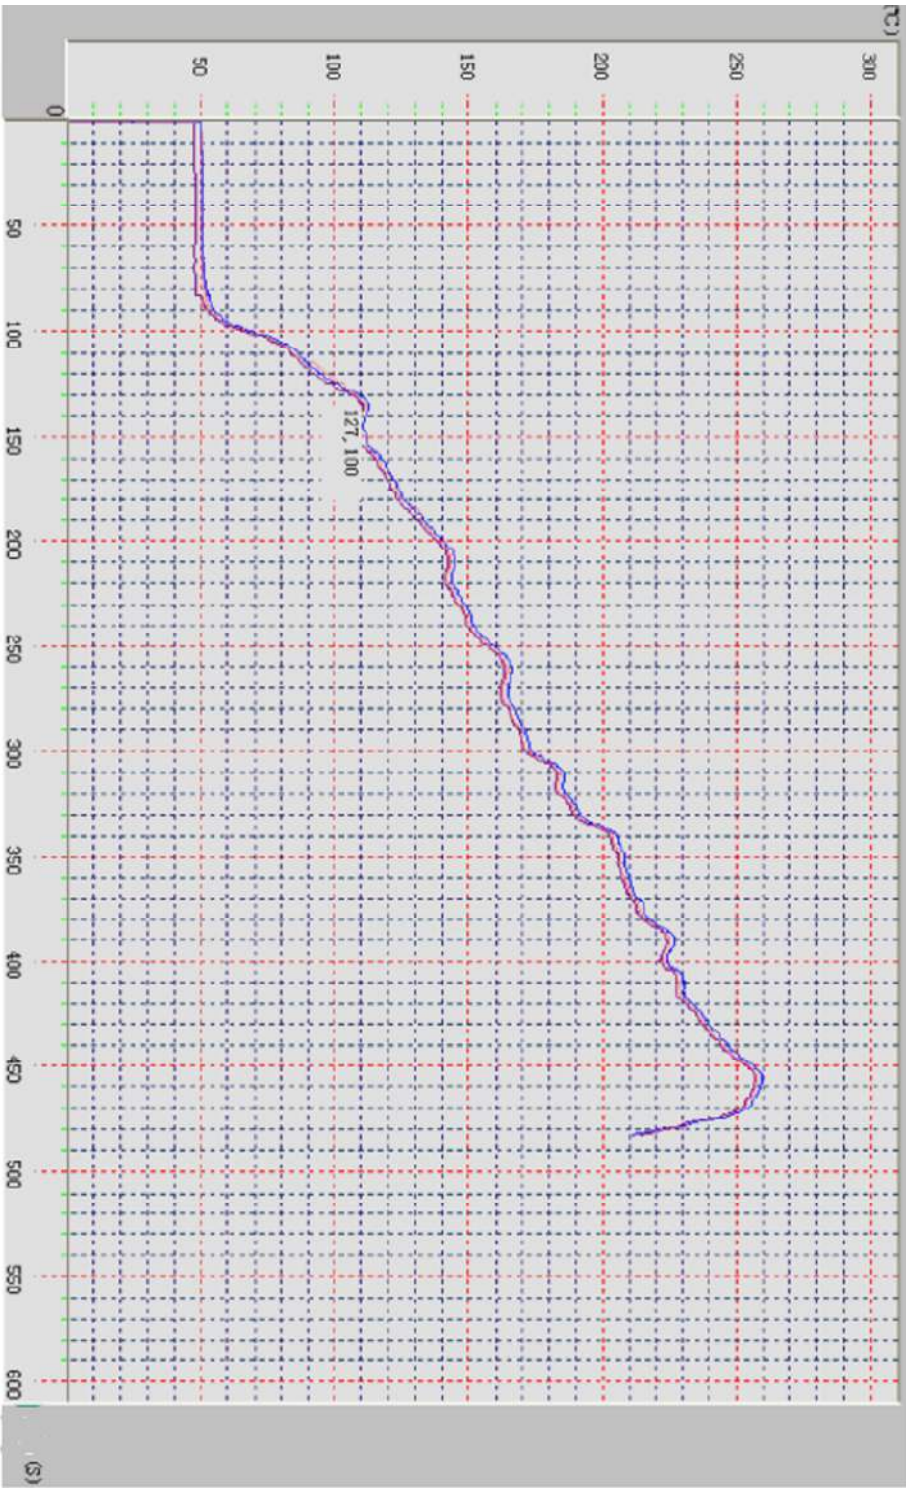

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H

H

RoHS compliant
Unit: mm



Scale	Free						
TOLERANCE							
X.X	±0.40	⑥	Add the soldering profile & Change the material to PA9T	22.03.2016	Winnie		Customer-No.
X.XX	±0.25	⑤	Update the packing	25.02.2014	Amy	Drawn	ASSMANN WSW-No.
X.XXX	±0.15	④	Add 06 poles version into the drawing	08.02.2014	Amy	Approved	AWHW2 XXA-0202
X.XXX	±3°	③	Add UL-File No	12.12.2013	Winnie		Drawing-No.
Angle°		②	Update	29.06.2009	Dean		ASS 2318 CO
		①	Drawn	25.01.2006	Alex		rev06
			Modification	Date	Name		Replace
							Sheet
							2/2



1

2

3

4

5

6

7

SV3505