


# 15 Amp With Surge Protection - Vertical Rack Mount Strips

1585, 1587 & 1588 "S" Series

## Key Features

- 1 5/8" x 1 3/8" aluminum profiles with hardware included for mounting to rack cabinet Amhal Struts or open relay racks.
- Receptacles are 1" square and are equally spaced over the length of the power strip (see tables below for spacing).
- Includes built in surge protection module
- With lighted on/off switch (or pilot light - see tables below) and 15 Amp. circuit breaker.
- Heavy 14 gauge wire cord - 14/3 SJT or SJTW for extreme temperature ranges and integral molded plug.
- Plug type available is a NEMA 5-15P straight blade (see picture below).
- For additional hardware kit, order part number 1585CLIP.
- These strips are also handy for work benches.
- Rated 15 amps, 120 volt.
- CSA certified, Standards C22.2 (No. 21-95, No. 42-99 and No. 8-M1986)
- UL listed, Standards UL1363, UL1449 and UL1283
- NOTE #1: Outlet strips can NOT be used between the front & rear panel rails of rack cabinets as they (and the equipment plugs) will interfere with mounted equipment and mounted accessories.
- NOTE #2: To properly use on rack cabinets, allow sufficient depth BEHIND the rear panel rails for vertically mounting to the amhal struts.

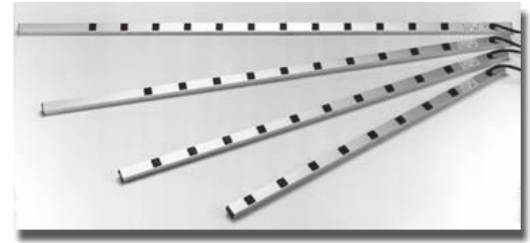

## With On/Off Switch & Surge Module

| Part No.   | Outlets | Center to Center | On-Off Switch | Cord Length | Plug Type | Strip Length |
|------------|---------|------------------|---------------|-------------|-----------|--------------|
| 1585H8A1S  | 8       | 5.00"            | Yes           | 6'          | Straight  | 48"          |
| 1585H8B1S  | 8       | 5.00"            | Yes           | 15'         | Straight  | 48"          |
| 1585H10A1S | 10      | 3.50"            | Yes           | 6'          | Straight  | 48"          |
| 1585H10B1S | 10      | 3.50"            | Yes           | 15'         | Straight  | 48"          |
| 1585H15A1S | 15      | 2.50"            | Yes           | 6'          | Straight  | 48"          |
| 1585H15B1S | 15      | 2.50"            | Yes           | 15'         | Straight  | 48"          |
| 1587H11A1S | 11      | 5.00"            | Yes           | 6'          | Straight  | 70"          |
| 1587H11B1S | 11      | 5.00"            | Yes           | 15'         | Straight  | 70"          |
| 1587H19A1S | 19      | 3.00"            | Yes           | 6'          | Straight  | 70"          |
| 1587H19B1S | 19      | 3.00"            | Yes           | 15'         | Straight  | 70"          |
| 1588H12A1S | 12      | 5.00"            | Yes           | 6'          | Straight  | 77"          |
| 1588H12B1S | 12      | 5.00"            | Yes           | 15'         | Straight  | 77"          |

## With Pilot Light (No Switch) & Surge Module

| Part No.   | Outlets | Center to Center | On-Off Switch | Cord Length | Plug Type | Strip Length |
|------------|---------|------------------|---------------|-------------|-----------|--------------|
| 1585T8A1S  | 8       | 5.00"            | No            | 6'          | Straight  | 48"          |
| 1585T8B1S  | 8       | 5.00"            | No            | 15'         | Straight  | 48"          |
| 1585T10A1S | 10      | 3.50"            | No            | 6'          | Straight  | 48"          |
| 1585T10B1S | 10      | 3.50"            | No            | 15'         | Straight  | 48"          |
| 1585T15A1S | 15      | 2.50"            | No            | 6'          | Straight  | 48"          |
| 1585T15B1S | 15      | 2.50"            | No            | 15'         | Straight  | 48"          |
| 1587T11A1S | 11      | 5.00"            | No            | 6'          | Straight  | 70"          |
| 1587T11B1S | 11      | 5.00"            | No            | 15'         | Straight  | 70"          |
| 1587T19A1S | 19      | 3.00"            | No            | 6'          | Straight  | 70"          |
| 1587T19B1S | 19      | 3.00"            | No            | 15'         | Straight  | 70"          |
| 1588T12A1S | 12      | 5.00"            | No            | 6'          | Straight  | 77"          |
| 1588T12B1S | 12      | 5.00"            | No            | 15'         | Straight  | 77"          |

## Surge Specifications

- 12,000 Amp rated MOV's.
- Maximum 36,000 Amps transient current and 780 Joules.
- 400V UL1449 suppressed voltage rating.
- Protection in all 3 AC modes, L-N, N-G and L-G.
- Voltage suppression at the outlet guards against transients from equipment on the power bar.

Outlet Strips with Surge Protection