


SPECIFICATIONS

PARAMETER	VALUE
FREQUENCY RANGE	48.000 MHz
MODE OF OSCILLATION	FUNDAMENTAL
FREQUENCY TOLERANCE AT 25°C	±7 PPM MAXIMUM
FREQUENCY STABILITY OVER TEMPERATURE	±15 PPM MAXIMUM
OPERATING TEMPERATURE RANGE	-30°C TO +95°C EXTENDED ↩
STORAGE TEMPERATURE RANGE	-40°C TO +85°C
AGING	±3 PPM PER YEAR MAXIMUM
LOAD CAPACITANCE	7 pF
EQUIVALENT SERIES RESISTANCE	22 Ω ↩
SPURIOUS MODE SERIES RESISTANCE	250 Ω MINIMUM
SHUNT CAPACITANCE	7 pF MAXIMUM
DRIVE LEVEL	500 μW MAXIMUM
SHOCK RESISTANCE	±5 PPM MAXIMUM 75 cm DROP TEST IN 3 AXES ONTO A HARD SURFACE
REFLOW CONDITIONS	260°C ±5°C FOR 10s MAXIMUM




Photo is not actual part

MECHANICAL SPECIFICATION

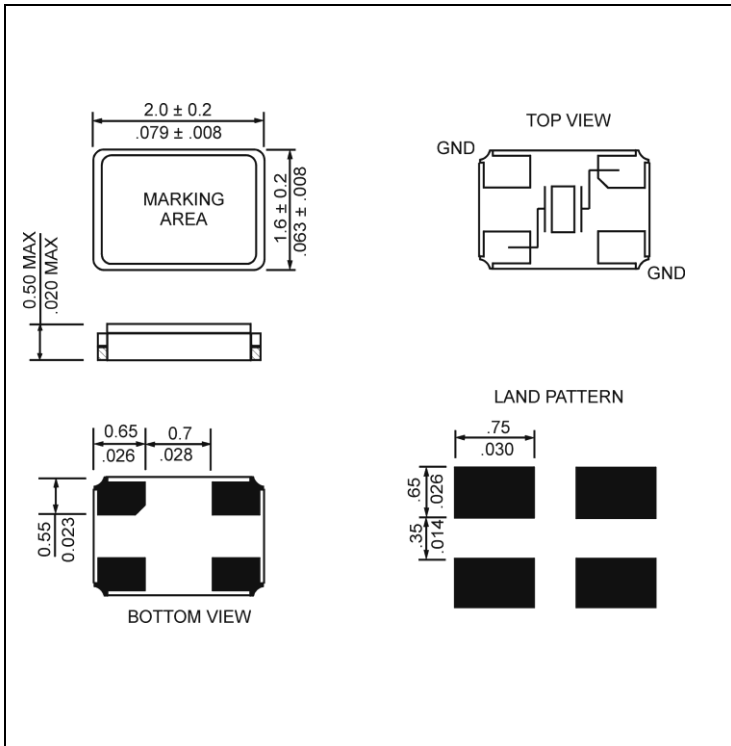

CARRIER TAPE DIMENSIONS

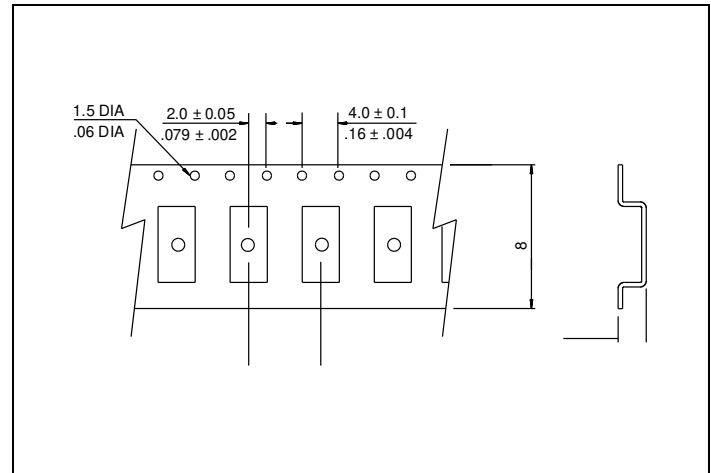

NOTE: REFER TO EIA-481 FOR DIMENSIONS

● PACKAGING

178 mm REEL DIAMETER
8 mm TAPE WIDTH, 4 mm PITCH
QUANTITY: 1000 PIECES PER REEL

IN ACCORDANCE WITH EIA-481

● REFLOW PROFILE



Reflow profile		
Temperature Min Preheat	T_{SMIN}	150°C
Temperature Max Preheat	T_{SMAX}	200°C
Time (T_{SMIN} to T_{SMAX})	t_s	60-180 sec.
Temperature	T_L	217°C
Peak Temperature	T_P	260°C
Ramp-up rate	R_{UP}	3°C/sec max.
Ramp-down rate	R_{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t_p	10 sec.
Time $t_{[25^\circ C]}$ to Peak Temperature	$t_{[25^\circ C]}$ to Peak	480 sec.
Time	t_L	60-150 sec.

● ENVIRONMENTAL

PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
RoHS-2	6/6 COMPLIANT & LEAD FREE
REACH SVHC	COMPLIANT
HALOGEN-FREE	COMPLIANT
ESD CLASSIFICATION LEVEL	N/A
TERMINATION FINISH	Au



Revision: A Initial Release
 Approval By: KJ
 Date: August 11, 2015