

## Interface module - VIP-2/SC/D37SUB/M - 2900676

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module, with screw connection and male D-Subminiature pin strip, for mounting on NS 35 rails, 37-pos.

### Product Features

- These VARIOFACE modules are used in combination with the relevant front adapters



### Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	200.0 GRM
Custom tariff number	85369010
Country of origin	United States

### Technical data

#### Dimensions

Width	101 mm
Height	65.5 mm
Depth	45.1 mm

#### Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

#### General

Max. permissible operating voltage	125 V AC/DC
Max. perm. current (per branch)	2 A
Number of positions	37
Status display	No

## Interface module - VIP-2/SC/D37SUB/M - 2900676

### Technical data

#### General

Mounting position	any
Standards/regulations	DIN EN 50178

#### Connection data for connection 1

Connection name	PCB connection
Connection in acc. with standard	IEC / EN
Connection method	Screw connection
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	8 mm
Screw thread	M 3

#### Connection data for connection 2

Connection name	D-SUB connection
Number of connections	1
Connection method	D-SUB pin strip
Number of positions	37

#### Supported controller

Controller	HONEYWELL C300
- suitable I/O card	TDIL01 (non-redundant)
	TDOB01 (non-redundant)
	TAOX01 (non-redundant)
	TAIX01 (non-redundant)
	TDIL11 (redundant)
	TDOB11 (redundant)
	TAOX11 (redundant)
	TAIX11 (redundant)

### Classifications

#### eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313

# Interface module - VIP-2/SC/D37SUB/M - 2900676

## Classifications

### eCl@ss

eCl@ss 5.1	27250313
eCl@ss 6.0	27242608
eCl@ss 7.0	27141152
eCl@ss 8.0	27141152

### ETIM

ETIM 2.0	EC001434
ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC002780

### UNSPSC

UNSPSC 6.01	30211824
UNSPSC 7.0901	39121421
UNSPSC 11	39121421
UNSPSC 12.01	39121421
UNSPSC 13.2	39121421

## Approvals

### Approvals

---

Approvals

UL Recognized / cUL Recognized / CSA / EAC / cULus Recognized

---

### Ex Approvals

---

Approvals submitted

---

### Approval details

UL Recognized	
mm <sup>2</sup> /AWG/kcmil	30-12

# Interface module - VIP-2/SC/D37SUB/M - 2900676

## Approvals

Nominal current I <sub>N</sub>	2 A
Nominal voltage U <sub>N</sub>	125 V

cUL Recognized

mm <sup>2</sup> /AWG/kcmil	30-12
Nominal current I <sub>N</sub>	2 A
Nominal voltage U <sub>N</sub>	125 V

CSA


mm <sup>2</sup> /AWG/kcmil	26-14
Nominal current I <sub>N</sub>	2 A
Nominal voltage U <sub>N</sub>	105 V

EAC

cULus Recognized

## Drawings

Circuit diagram

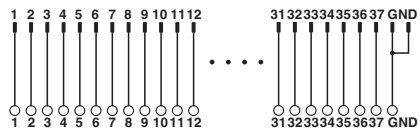

Connection scheme VIP-2/SC/D37SUB/M

