
Molded Parts Specification Control Drawing


Part Number: 202F2XX-X-22

Description: Boot, Straight, With Lip


NOTES

- 1. All dimensions are in $\frac{\text{inches}}{[\text{millimeters}]}$
- 2. Dimensions appearing in table are as follows:
 - a As Supplied
 - b After Unrestricted Recovery
- 3. Coating is optional. As supplied dimensions appearing in table are for uncoated parts. When coating is added, entry diameters will be reduced by .06 max.
- 4. "S" & "T" dimensions apply to a minimum of 240° of the circumference.

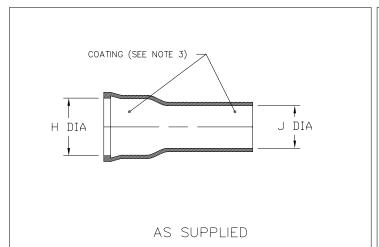

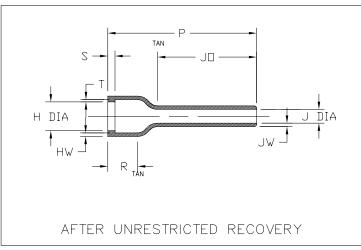

| TABLE OF DIMENSIONS | | | | | | | | | | | |
|---------------------|------------|------------|--------|------------|-------------|------------|-------------|-------|-------------|------------|-------|
| PART NUMBER | Н | | J | | Р | R | JO | HW | JW | S | Т |
| | Min | Max | Min | Max | ±10% | ±10% | ±10% | 06/03 | ±.03 · | +.06/03 | ±.03 |
| | а | b | а | b | b | b | Ь | b | b | b | b |
| 202F211-x-22 | <u>.94</u> | <u>.39</u> | .68 | .26 | 3.00 | .46 | 2.23 | .06 | <u>.06</u> | .06 | .05 |
| | [23,9] | [9,9] | [17,3] | [6,6] | [76,2] | [11,7] | [56,6] | [1,5] | [1,5] | [1,5] | [1,3] |
| 202F221-X-22 | 1.07 | .52 | .82 | .30 | 3.25 | .48 | <u>2.36</u> | .06 | <u>.06</u> | .06 | .05 |
| | [27,2] | [13,2] | [20,8] | [7,6] | [82,5] | [12,2] | [59,9] | [1,5] | [1,5] | [1,5] | [1,3] |
| 202F232-X-22 | 1.22 | .73 | .96 | .35 | 3.50 | .48 | <u>2.48</u> | .07 | .06 | .07 | .05 |
| | [31,0] | [18,5] | [24,4] | [8,9] | [88,9] | [12,2] | [62,9] | [1,8] | [1,5] | [1,8] | [1,3] |
| 202F242-X-22 | 1.40 | .87 | 1.13 | <u>.40</u> | 4.00 | <u>.48</u> | 2.87 | .07 | <u>.06</u> | .07 | .05 |
| | [35,6] | [22,1] | [28,7] | [10,2] | [101,6] | [12,2] | [72,9] | [1,8] | [1,5] | [1,8] | [1,3] |
| 202F253-X-22 | 1.53 | 1.11 | 1.24 | <u>.43</u> | 4.25 | .55 | 2.85 | .07 | <u>.06</u> | .07 | .07 |
| | [38,9] | [28,2] | [31,5] | [10,9] | [107,9] | [14,0] | [72,4] | [1,8] | [1,5] | [1,8] | [1,8] |
| 202F263-X-22 | 1.78 | 1.27 | 1.51 | .50 | 4.50 | <u>.60</u> | <u>2.92</u> | .07 | .06 | .07 | .07 |
| | [45,2] | [32,3] | [38,4] | [12,7] | [114,3] | [15,2] | [74,2] | [1,8] | [1,5] | [1,8] | [1,8] |
| 202F274-X-22 | 2.03 | 1.62 | 1.79 | .59 | <u>4.65</u> | .60 | <u>2.86</u> | .07 | . <u>07</u> | <u>.07</u> | .07 |
| | [51,6] | [41,1] | [45,5] | [15,0] | [118,1] | [15,2] | [72,6] | [1,8] | [1,8] | [1,8] | [1,8] |



TYCO ELECTRONICS 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025 Revision: F

Part Number :

202F2XX-X-22

Date: 11/15/06 MP060147 Description :

Boot, Straight, With Lip

If this document is printed it becomes uncontrolled. Check for the latest revision


Page 1 of 2

Molded Parts Specification Control Drawing

Part Number: 202F2XX-X-22

Description: Boot, Straight, With Lip

| COMPATABILITY CHART | | | | | | | | | | |
|---------------------|----------------------|----------------|-------------------|------------------------|---------------------|--|--|--|--|--|
| MATERIAL DASH NO. | MATERIAL DESCRIPTION | RT SPEC | COATING SLASH NO. | COATING S NO. | COATING DESCRIPTION | | | | | |
| -50 | Flexible Viton | RT-1313 | N/A | | | | | | | |
| -51 | Flexible EPB | RT-1321 | /86,/164,/180 | S-1048; S-1124; S-1030 | Adhesive | | | | | |
| -71 | Flexible Polyolefin | RT-1316 | /42,/86,/180 | S-1017; S-1048; S-1030 | Adhesive | | | | | |
| -770 | NBCCS | RT-770 TYPE II | N/A | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |

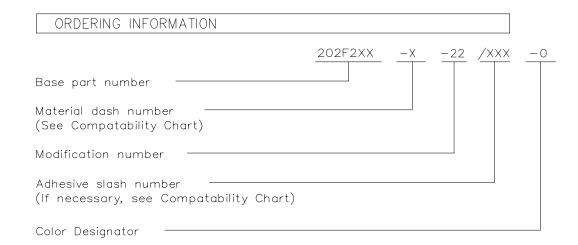

THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE; CONSULT YOUR NEAREST FIELD REPRESENTATIVE FOR CURRENT REVISION

If this document is printed it becomes uncontrolled. Check for the latest revision

TUGO Electronics Reychem

TYCO ELECTRONICS 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025 Revision: F

Part Number :

202F2XX-X-22

Date: 11/15/06

1/15/06

Description :

Boot, Straight, With Lip

MP060147

Page 2 of 2