




| LOC | DIST | REVISIONS | | | |
|-----|------|---------------------------|---------|-----|------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | K | EC 0G3C 0760 04 | 24DEC04 | BSV | JLG |
| | K1 | REVISED PER ECO-09-020689 | 28AUG09 | KK | AEG |

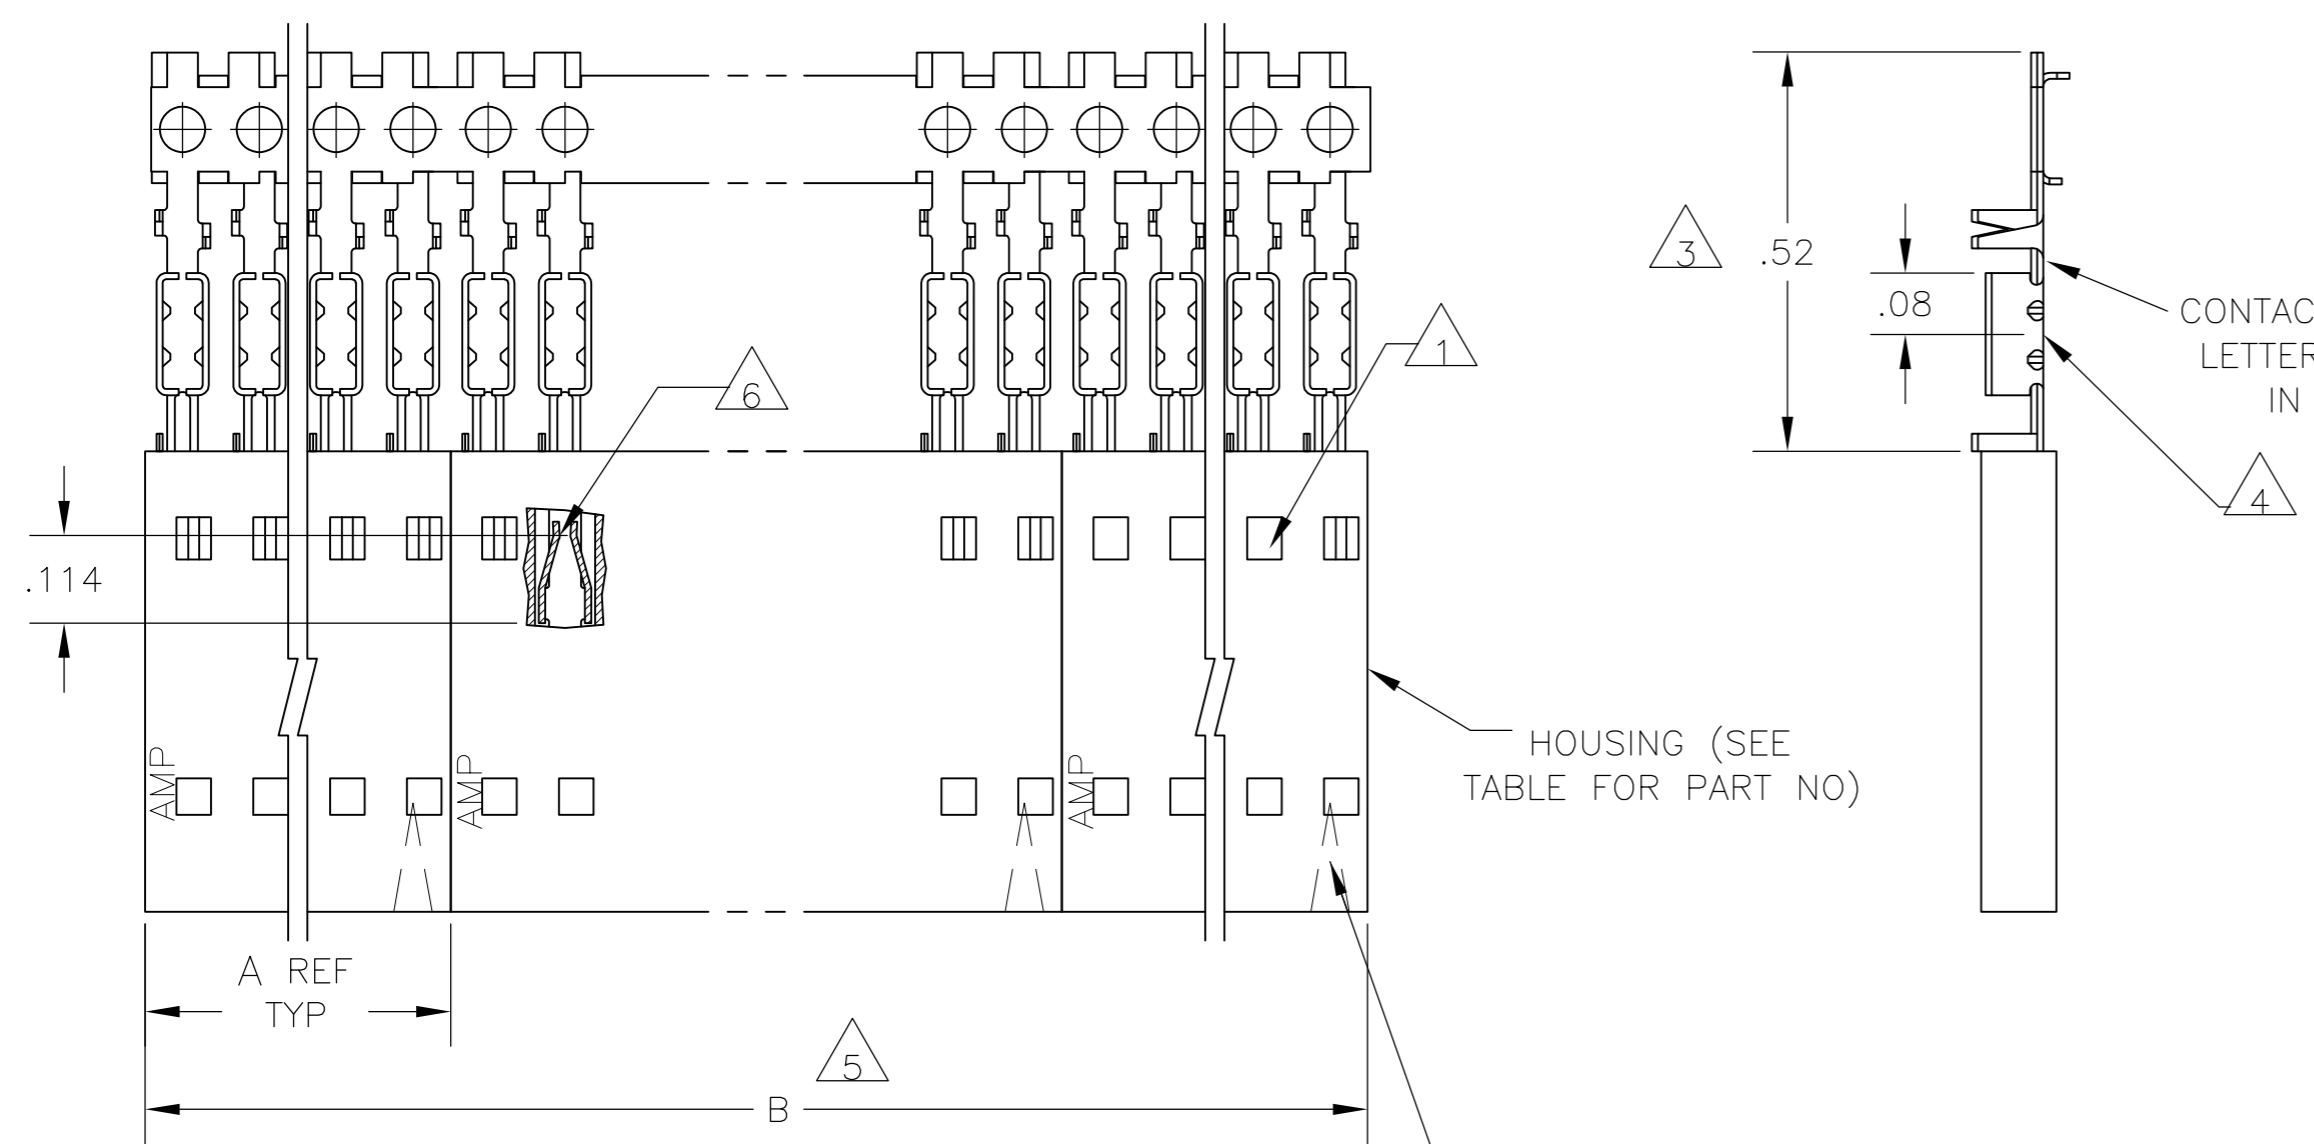

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 7 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 8 CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 9 CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

HOUSING (SEE TABLE FOR PART NO)

POSITION #1 INDICATOR (FARSIDE)

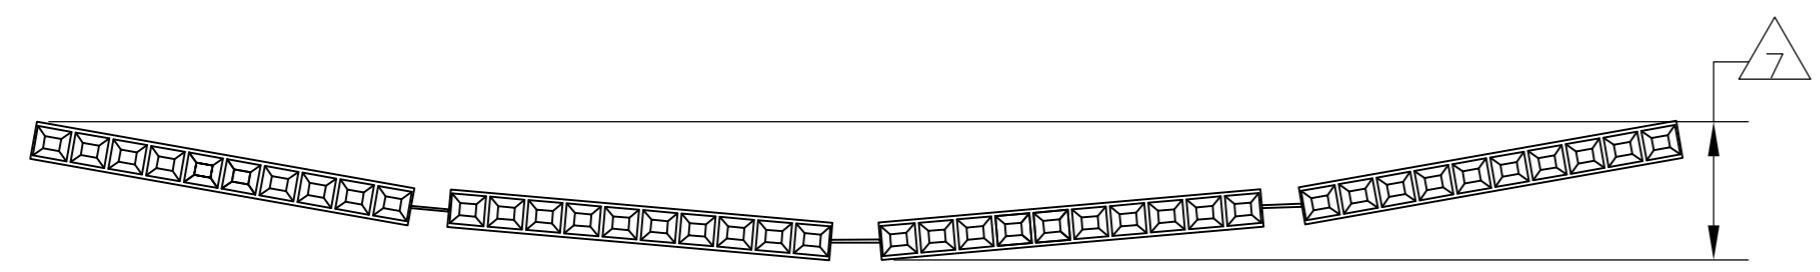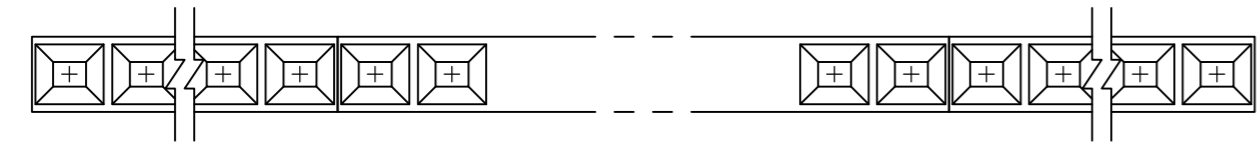

EXAMPLE: STRIP ASSEMBLY
SCALE 2:1

| PLATING | 6 | B | A | HOUSING PART NUMBER | NO OF POSN | ASSEMBLY PART NUMBER ON STRIP | |
|----------|----|------|------|---------------------|------------|-------------------------------|------------|
| OBSOLETE | 9 | 2 | 2.40 | 1.198 | 1-103688-1 | 12 | 6-104438-1 |
| | 9 | 2 | 2.20 | 1.098 | 1-103688-0 | 11 | 6-104438-0 |
| | 9 | 2 | 2.00 | .998 | 103688-9 | 10 | 5-104438-9 |
| | 9 | 2 | 1.80 | .898 | 103688-8 | 9 | 5-104438-8 |
| | 9 | 2 | 1.60 | .798 | 103688-7 | 8 | 5-104438-7 |
| | 9 | 2 | 1.40 | .698 | 103688-6 | 7 | 5-104438-6 |
| | 9 | 4 | 2.39 | .598 | 103688-5 | 6 | 5-104438-5 |
| | 9 | 4 | 1.99 | .498 | 103688-4 | 5 | 5-104438-4 |
| | 9 | 5 | 1.99 | .398 | 103688-3 | 4 | 5-104438-3 |
| | 9 | 5 | 1.49 | .298 | 103688-2 | 3 | 5-104438-2 |
| OBSOLETE | 8 | 10 | 1.98 | .198 | 103688-1 | 2 | 5-104438-1 |
| | 8 | 2 | 2.40 | 1.198 | 1-103688-1 | 12 | 1-104438-1 |
| | 8 | 2 | 2.20 | 1.098 | 1-103688-0 | 11 | 1-104438-0 |
| | 8 | 2 | 2.00 | .998 | 103688-9 | 10 | 104438-9 |
| | 8 | 2 | 1.80 | .898 | 103688-8 | 9 | 104438-8 |
| | 8 | 2 | 1.60 | .798 | 103688-7 | 8 | 104438-7 |
| | 8 | 2 | 1.40 | .698 | 103688-6 | 7 | 104438-6 |
| | 8 | 4 | 2.39 | .598 | 103688-5 | 6 | 104438-5 |
| | 8 | 4 | 1.99 | .498 | 103688-4 | 5 | 104438-4 |
| | 8 | 5 | 1.99 | .398 | 103688-3 | 4 | 104438-3 |
| 8 | 5 | 1.49 | .298 | 103688-2 | 3 | 104438-2 | |
| 8 | 10 | 1.98 | .198 | 103688-1 | 2 | 104438-1 | |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN M PASTAL 7-12-88
 CHK P deJONG 7-12-88

Tyco Electronics Corporation
 Harrisburg, Pa 17105-3608

RCPT ASSY AMPMODU MTE, SINGLE ROW,
 .100 CL, HIGH, PRESSURE
 FOR #26-30 AWG WIRE SIZE, STRIP FORM

108-25034
 114-25026

SIZE A2 CAGE CODE 00779 DRAWING NO C=104438

MAUFACTURING: FLAME RETARDANT THERMOPLASTIC, COLOR:BLACK CONTACTS: PHOS BRONZE
 FINISH SEE TABLE

WEIGHT -

CUSTOMER DRAWING

SCALE 4:1 SHEET 1 OF 1 REV K1