

REV. 0  
DCO 16895


COIL: @ 25°C	75 OHMS ± 10%
RESISTANCE	
NOMINAL VOLTAGE	6.0 VDC
MUST OPERATE	2.75 VDC
MUST RELEASE	1.65 VDC MAX, 0.27 VDC MIN

ENVIRONMENT:

VIBRATION	10	CPS TO	2500	CPS @	20	g's
SHOCK	50	g's	11	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE 6 MS MAX  
RELEASE 5 MS MAX  
CONTACT STABILIZATION 2.5 MS MAX

CUSTOMER DATA SHEET

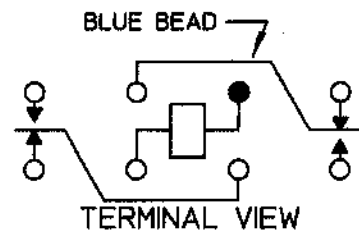

CONTACT RATING: 2 AMPS 28 VDC  
0.1 AMP 115 VAC RESISTIVE 0.5 AMPS  
28 VDC INDUCTIVE 100,000 OPERATIONS

DR. PBB 3/23/01 CK. TLG 03-23-01



CUST. QPL  
CUST. NO. M39016/44-017M REV.

"HMS" RELAY

HMS1201S109M