

Ratings

Voltage: 600 V
 Temperature: -40~105 °C
 Flammability: FT2

Conductor

Conductor count: 2
 Gauge: 16 AWG 1.31 mm²
 Material: tinned copper strands
 Strand size: $\varnothing 0.16 \times 65$
 Resistance at 20 °C: 15 Ω /km max

Insulator

Material: mPPE
 Color: red, black
 Diameter: $\varnothing 2.4 \pm 0.10$ mm
 Average thickness: 0.43 mm
 Resistance at 20 °C: 100 M Ω /km min

Wrap

Material: cotton paper



Outer jacket

Material: mPPE, 85A
 Color: black
 Diameter: $\varnothing 7.5 \pm 0.30$ mm
 Average thickness: 1.3 mm

Wire marking: E339579 UL AWM STYLE 21509 16 AWG 105°C
 600V --- cUL AWM I A 105°C 600V FT2 TENSILITY

Bend radius

Minimum: 6 times diameter (45.0 mm)

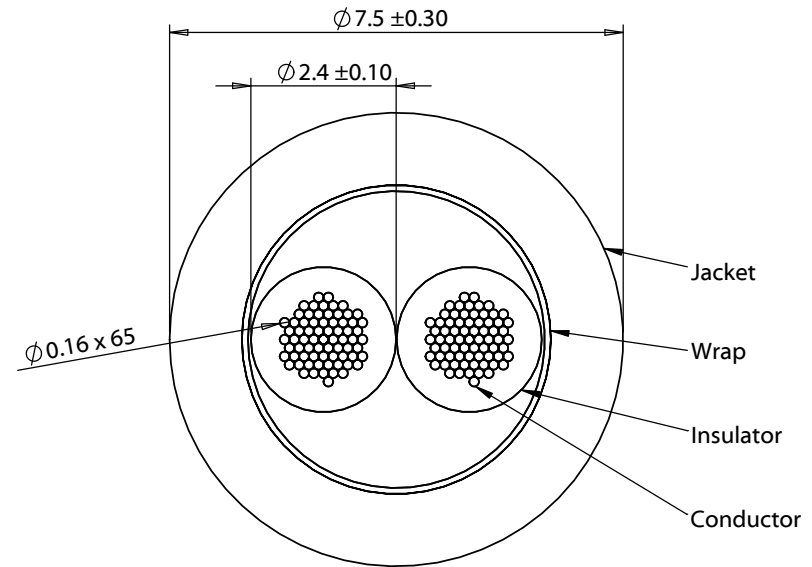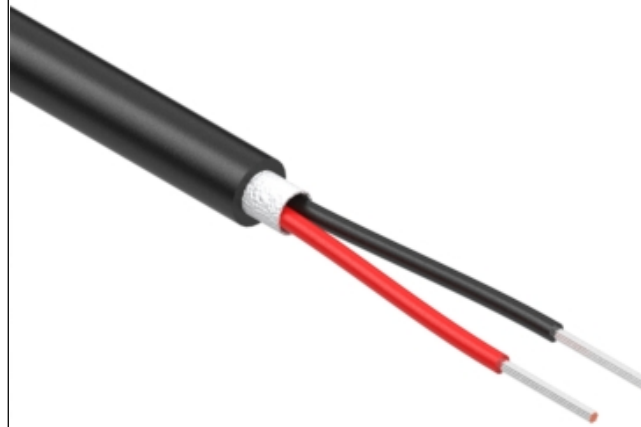

Revision:	Date:	Description:	Prepared: AW <small>Digitally signed by AW Date: 2021.05.06 12:33:01 -07'00'</small>	Notes:	TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	5/5/2021	Initial release	Verified: JC <small>Digitally signed by JC Date: 2021.05.10 16:10:47 -07'00'</small>	RoHS compliant Phthalate and halogen free	
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description:	Size: Part number:
				Wire, 2C TS, 16 AWG, 21509, 600V, 105C, 7.5 mm, FT2, mPPE	A 30-01973
				Scale: 8:1	Sheet 1 of 1

4

4

3

2

1