

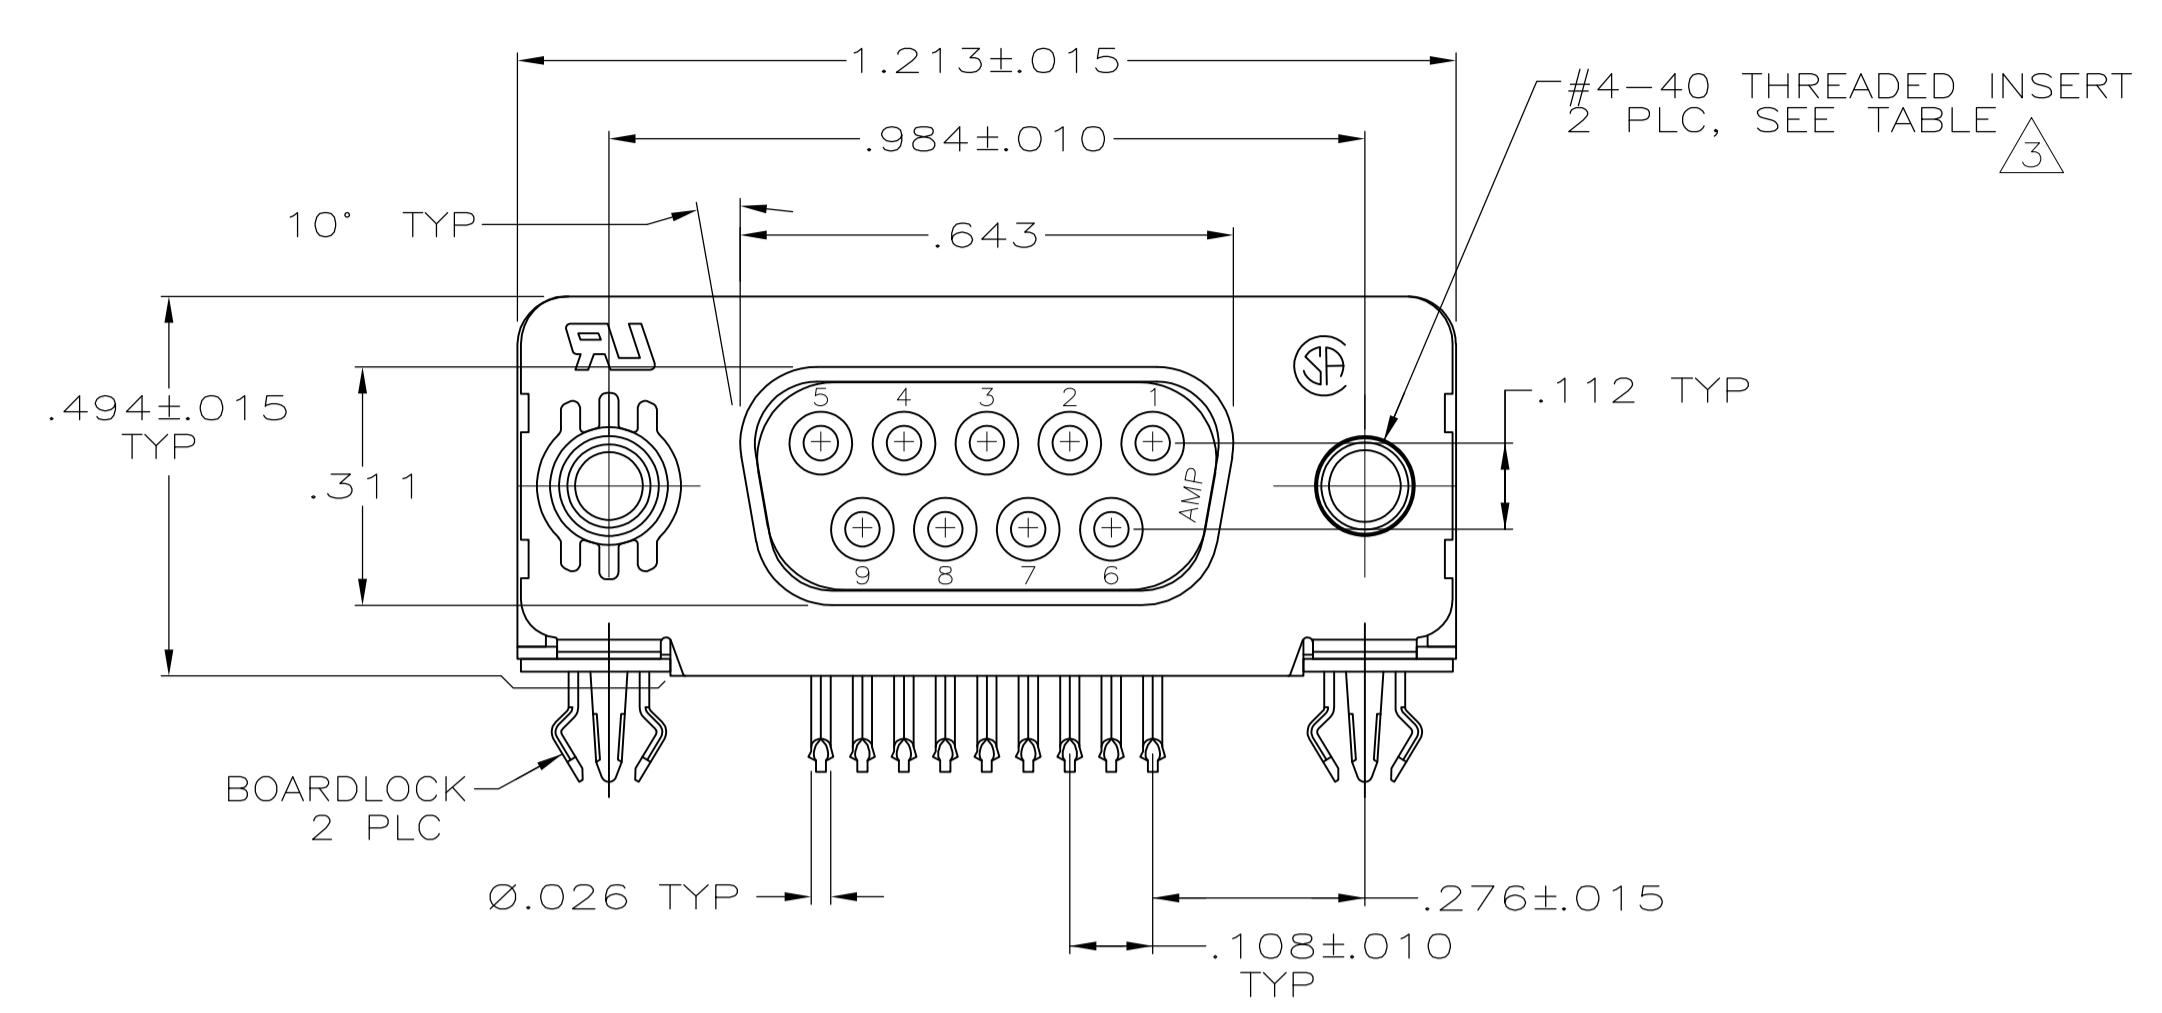
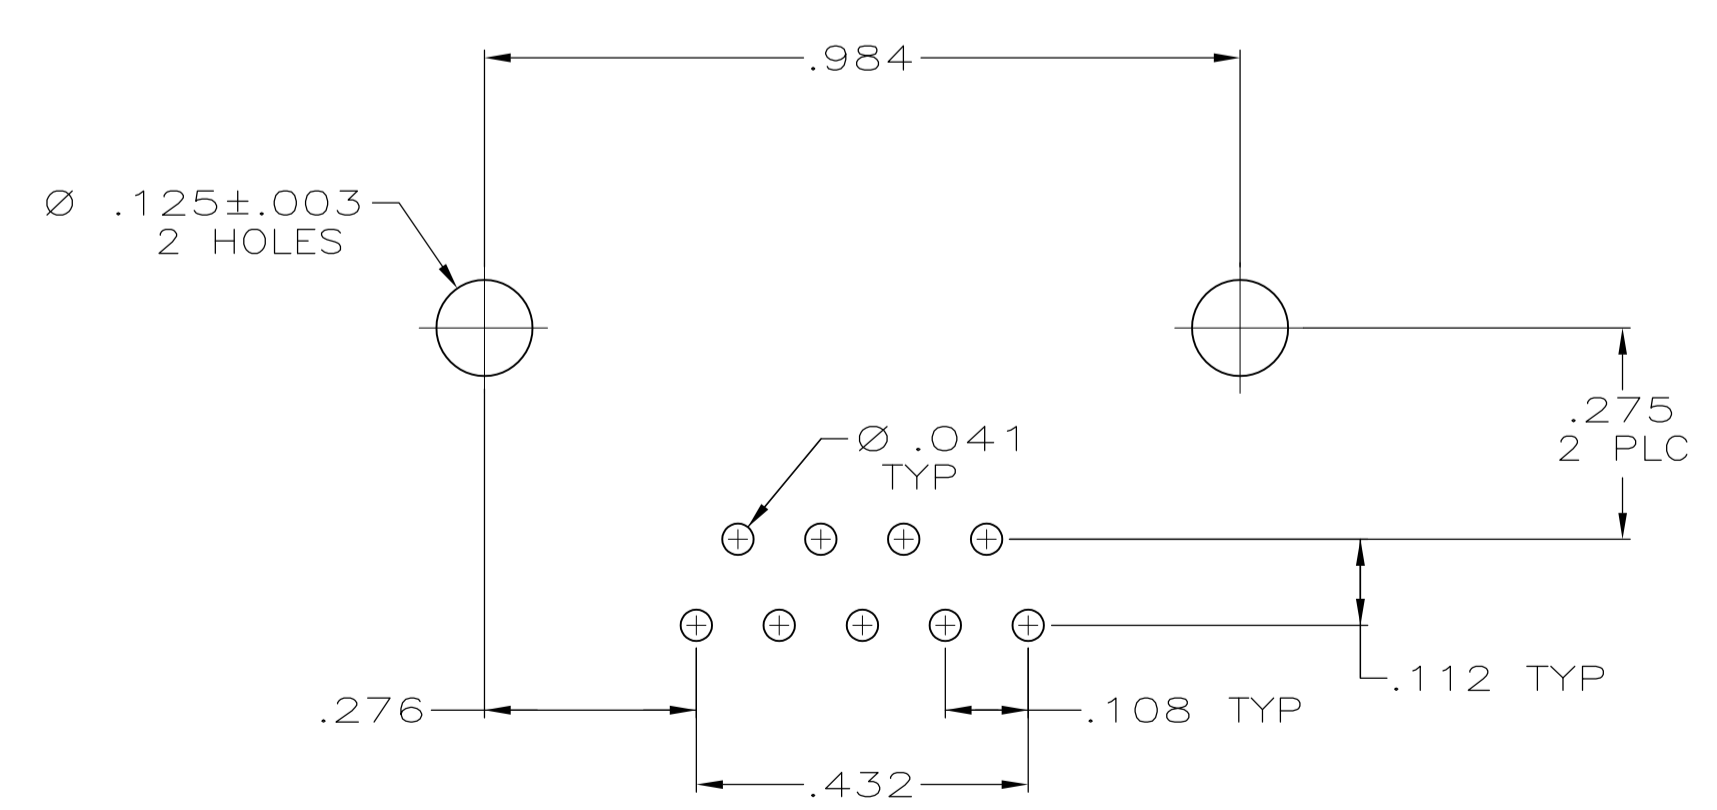


LOC	DIST	REVISED PER			
GP	00	P	LTR	ECO-11-004835	11MAR11
		DATE	DWN	APVD	
		REVISIONS			

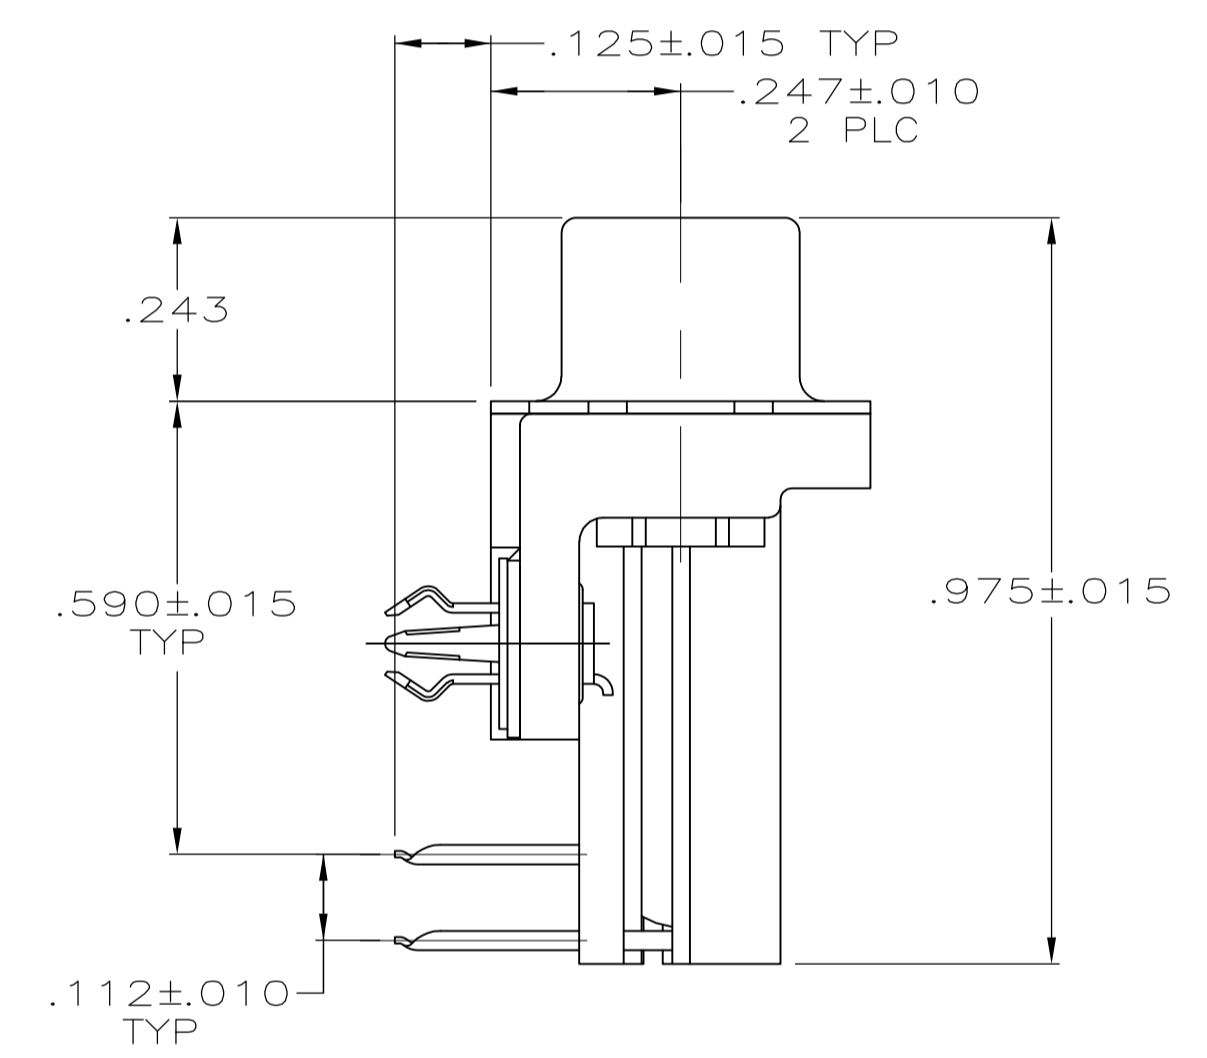

- ⚠ HOUSING: NYLON OR POLYESTER, FLAME RETARDANT, UL 94V-0 RATED, GLASS FILLED, BLACK.
- CONTACTS: PHOS BRONZE.
- SHELL: CARBON STEEL.
- EYELETS: BRASS.
- BOARDLOCKS: COPPER ALLOY.
- SCREWLOCKS: ZINC.
- INSERTS: ZINC.
- ⚠ CONTACTS: .000030 GOLD FOR A DISTANCE OF .100 MIN FROM MATING END, .000100-.000200 TIN ON TERMINATION END, ALL OVER .000050 NICKEL ON ENTIRE CONTACT.
- SHELL: .000100 MIN TIN OVER .000050 MIN NICKEL.
- EYELETS: .000200 MIN TIN OVER COPPER FLASH.
- BOARDLOCKS: .000200 MIN TIN OVER .000050 MIN NICKEL.
- SCREWLOCKS: CLEAR CHROMATE.
- INSERTS: CLEAR CHROMATE.
- ⚠ SCREWLOCKS & INSERTS WILL WITHSTAND 4 IN LBS TORQUE & 20 LBS PULL OUT FORCE FROM MATING FACE SIDE.

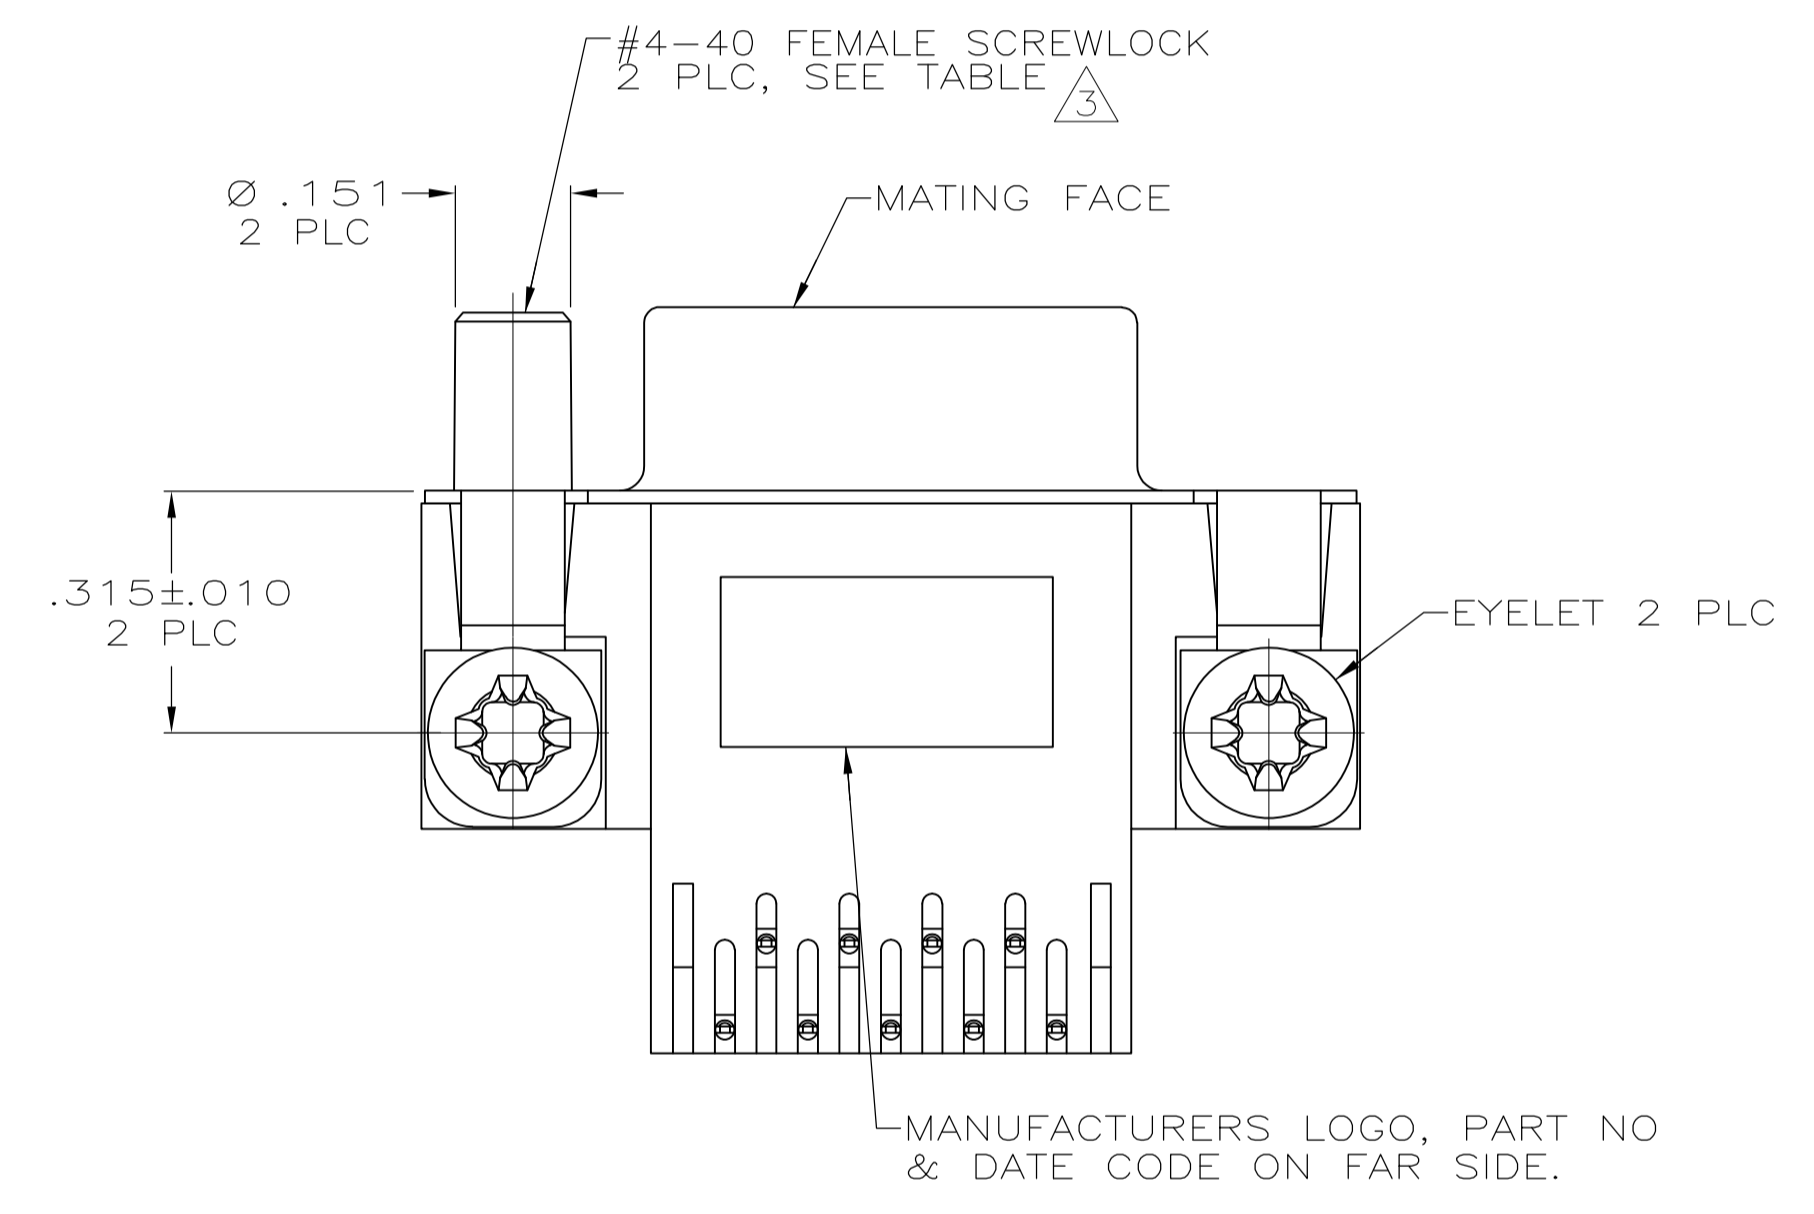

PC BOARD MOUNTING DIMENSIONS

**COPYRIGHT 2005
TE CONNECTIVITY CORP
ALL RIGHTS RESERVED**

FEMALE SCREWLOCKS	5747836-6
THREADED INSERTS	5747836-4
MOUNTING HARDWARE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN 04-11-05 G. ATTADIA - DOCKS		TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 04-11-05 M. WALMSLEY	
0 PLC ± -		1 PLC ± -		NAME RECEPTACLE ASSEMBLY, SIZE 1, RIGHT ANGLE, .590 SERIES, FRONT METAL SHELL, .026 DIA POSTS, BOARDLOCKS, AMPLIMITE HD-20	
1 PLC ± -		2 PLC ± -		PRODUCT SPEC 108-40025	
2 PLC ± -		3 PLC ± .005		APPLICATION SPEC 114-40010	
3 PLC ± -		4 PLC ± -		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
4 PLC ± -		ANGLES ± °		A1 00779 5747836	
MATERIAL		FINISH		WEIGHT	
1		2		CUSTOMER DRAWING	
		SCALE 4:1		SHEET 1 of 1 REV P	