
## PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION										
REV	DESCRIPTION	DATE	APPROVED							
A	INITIAL RELEASE, RFS. 13647, BS	05/15/08	BS							



DASH

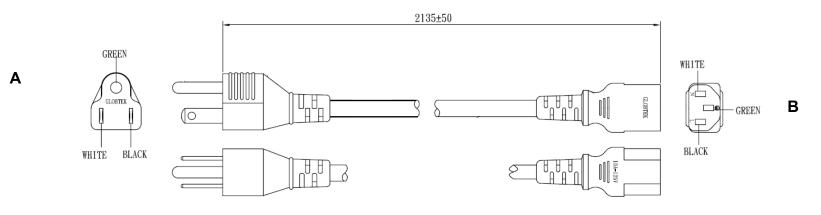

NOTES

## **GENERAL SPECIFICATIONS:**

RATING: 13A / 125V AC CABLE TYPE / SIZE: SJTW. 16 AWG X 3

105° C MIN. **TEMPERATURE RATING:** 

CONDUCTOR COLORS: BLACK / WHITE / GREEN

CABLE JACKET COLOR: BLACK

2135+ 50 mm OVERALL LENGTH (L): CABLE OUTER DIAMETER: 7.8 + 0.15 mm END 'A' TERMINATION: **NEMA 5-15P** END 'B' TERMINATION: IEC 320 / C13 APPROVALS PLUG: UL. CSA or cUL APPROVALS CABLE: UL, CSA or cUL APPROVALS CONNECTOR: UL, CSA or cUL


## **PACKING:**

**HANKING** 

PART NO

05/12/08

MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.



REV

## NOTES:

1. CORD. PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).





	NO.								
	TABULATION BLOCK								
			DECIMALS .xx +/- 0.1 .xxx +/005	ANGULAR +/- 1°	GlobTek, Inc.	186 Veterans Dr. Nort Tel. 201-784-1000 F:			
s	INIT.BY: BS	DATE: 05/12/08	MILLIMETERS .xx +/- 0.3 .xxx +/013	ANGULAR +/- 1°	DWG TITLE: NORTH AMERICAN	TLE: NORTH AMERICAN DETACHABLE CORDSET			
	DRAWN: NF	DATE: 05/12/08	FSCN No.: G, CC	SIZE A	MODEL: N / A		REV.		
	APRVD: HM DATE: SCALE: NONE		PART NO: 3021247F701(R)		SHEET 1/1				

DESCRIPTION

Contents of this document are subject to change without prior notice

Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL,CSA or EN Standards for proper installation instruction.

Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.