

MARKETING SALES DRAWING DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING DIMENSIONS IN METRIC - []

Electrical Testing per Tusonix standard test plans and Mil-Std-202 Test Methods.



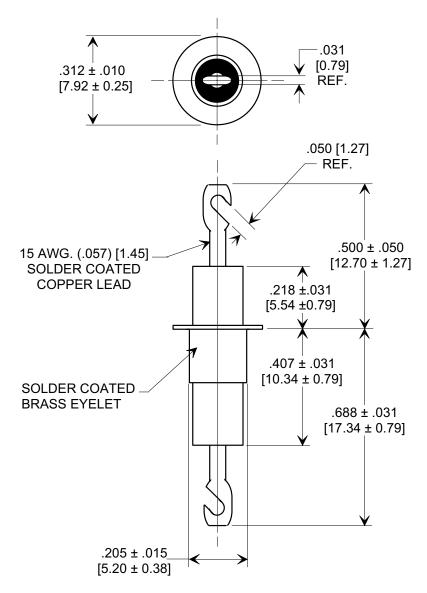

١ſ	MIN.	WORKING VOLTAGE (WVDC)		CURRRENT		DWV	MINIMUM NO-LOAD INSERTION LOSS			
ΙL	CAP (pF)	85°C	125°C	ldc	@ 100 (VDC)		10 MHz	100 MI	Hz 1 GHz	10 GHz
	4500	1000	500	25A	10 G Ω	1500 VDC	8	50	70	70
RECORD	8 [5.20] CL'S ± .031 CL'S ± .031 T					Unle	Specified EMI		EYELET EMI FIL	_
ON RE	201 201 7'D 331 L.E -3-0			[/		ANGLE	S ± ///	Drawn	S.M. 12-01-03	Scale 3 X
<u>Se</u>	1 Releas 00312 5 REV 5 ± .0	2.21 TED 219			77.77.61		SONIX	Approved T.C. 12-01-03		
X-2015 RE\	Original R C.O. 200 DIM'S F WAS [5.0 DELET						ON, ARIZONA	A	410	6-001