



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
04/12/13	A	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	
06/14/13	B	UPDATED TITLE	T.B.	B.S.	
05/12/17	C	DIM. 156.50 WAS 156.46	T.B.	B.S.	

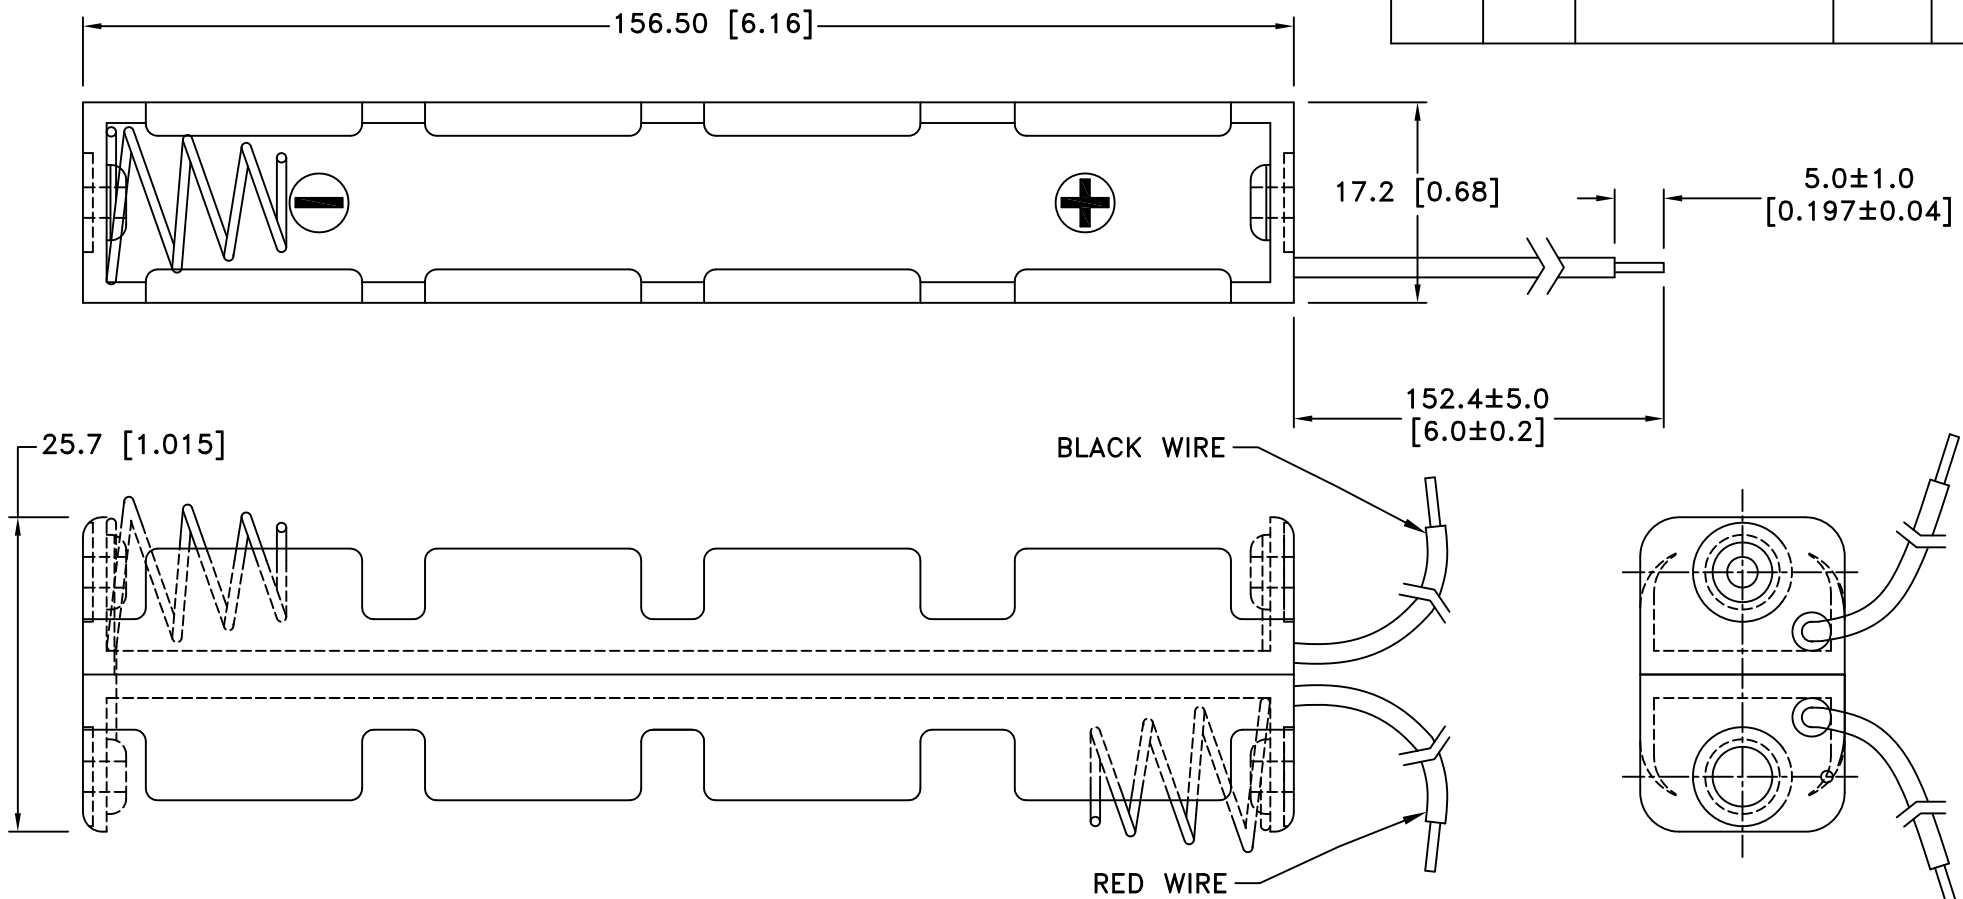

NOTES:

- Plastic material - Polypropylene
- Flammability Rating -UL94-HB, UL File NO. E216959
- Temperature Range: -10°C to +100°C
- Wires: 26 AWG, UL 1007, CSA, TR-64, 300V, 80°C
- Springs - Nickel Plated Spring Steel
- Rivets - Brass, Nickel Plated
- CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000
- ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title SIX "AA" CELL HOLDER WITH WIRE LEADS	Date 05/12/17	
Fractional ± .8 (.030)		Drawing Number BH16AAW	
Angular ± 3°			