

Ŧ	۵	н п	m	0



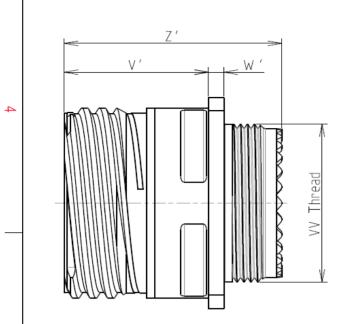

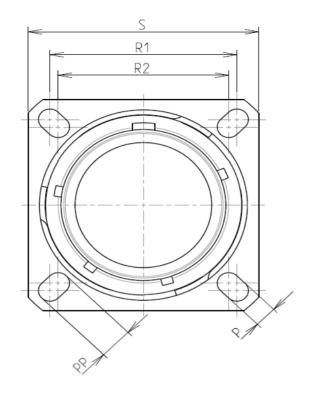

Keying Shown as example

CHARACTERISTICS

-Salt Spray

ယ

 \sim


-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy 0.8µm minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			

: 2000 hours

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
۷'	19.5+1.4/-0		
W'	2.1/3.65		
Ζ'	32 Max		
VV THREAD	M18x1-6g		



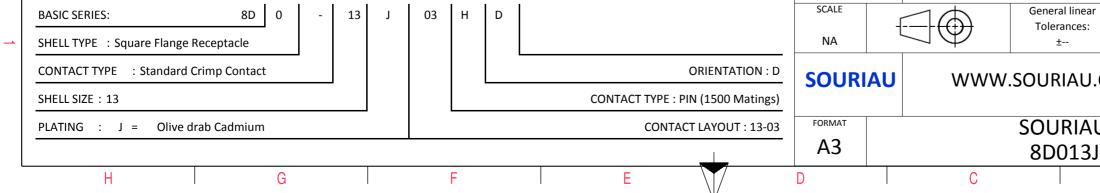

0		σ		Þ		
						4
LAY	YOUT SHOWN AS EXA	MPLE				3
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed						2
PN: 8D013J03HD						
rst Release						
Date:			CUSTO	MER DRAWING		
Composite Receptacle 8D series						
$\exists \bigoplus$	General linear Tolerances: ±			DS / PROJECT 859		1
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
SOURIAU DRG N° SHEET 8D013J03HD-C 1/2						
С	00013103	B		A	, -	J

	Ŧ	G	н г	m	D	0	
		Contact Layout					Panel Cutou
4		03 ())) 3#16				SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47					
ω						ØA ØA R1 ØT	A
	F						
-	•					SOURIAU shall not be due to a use of the the Specifications issued (professional re	Products wh d by either of
N							Countr FR
						PN: 8	8D013J
					A 14-	10-2016 First Release	
					ISS I Designed By:	DATE Latest modification - by Date:	
					тіті	.E Co	omposite
_					SCALE		neral linear olerances: ±
					SOUR	KIAU WWW.SOU	JRIAU.C
					FORMAT A3		URIAU D013J0
l	Н	G	F	E	D	C	

