



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF AMPHENOL CABLES ON DEMAND. ANY REPRODUCTION OR DISCLOSURE TO THIRD PARTIES IN PART OR WHOLE WITHOUT THE EXPRESS WRITTEN PERMISSION OF AMPHENOL CABLES ON DEMAND IS PROHIBITED.

REV.	DESCRIPTION	DATE	APPROVED
A	NEW RELEASE	15/SEP/09	
A1	CHANGE BNC IMPEDANCE FROM 80 OHM TO 75 OHM.	28/OCT/09	
A2	ADD LENGTH LIST	29/DEC/09	

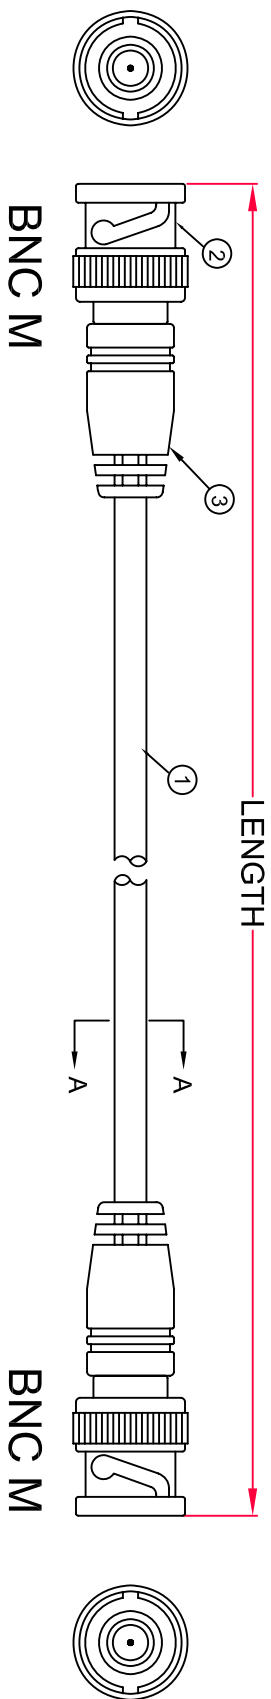

SECTION A-A

LENGTH & P/N Table

LENGTH	P/N
6 INCH(152± 15mm)	CO-059BNCX200-000.6
1FT(305± 20mm)	CO-059BNCX200-001
1.5FT(457± 20mm)	CO-059BNCX200-001.5
2FT(610± 30mm)	CO-059BNCX200-002
3FT(914± 30mm)	CO-059BNCX200-003
4FT(1219± 30mm)	CO-059BNCX200-004
5FT(1524± 30mm)	CO-059BNCX200-005
6FT(1829± 30mm)	CO-059BNCX200-006
7.5FT(2286± 40mm)	CO-059BNCX200-007.5
10FT(3048± 40mm)	CO-059BNCX200-010
12FT(3658± 50mm)	CO-059BNCX200-012
15FT(4572± 50mm)	CO-059BNCX200-015
25FT(7620± 100mm)	CO-059BNCX200-025
50FT(15240± 150mm)	CO-059BNCX200-050
75FT(22860± 150mm)	CO-059BNCX200-075
100FT(30480± 200mm)	CO-059BNCX200-100
150FT(45720± 200mm)	CO-059BNCX200-150
200FT(60960± 300mm)	CO-059BNCX200-200

- NOTES:
- 1.CABLE:122AWG(1/0.643± 0.01mm)]CP*1C+ BRAID[(16*8/0.12± 0.008mm)] TINNEE COPPER INSULATION:PE OD= 3.7± 0.10mm COLOR:TRANSPARENT JACKET:HALF MATTE PVC OD=Ø6.15± 0.15mm COLOR:BLACK
 - 2.CONNECTOR:BNC Male NICKEL-PLATED 75 OHM
 - 3.MOLDING SR:45Pa PVC BLACK
 - 4.OPEN/SHORT MISS WIRE TEST 100 %
 - 5.CONDUCTOR RESISTANCE ≤ 225.6Ω/km
 - 6.INSULATION RESISTANCE ≥ 2MΩ DC300V 0.01Sec
- ALL MATERIALS SHOULD ACCORD WITH ROHS STANDARD.

PIN OUT:
 CENTER _____ CENTER
 SHELL _____ SHELL



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:

DEVIAS	±.X	ANGLES	±.X°
.XX	±.XX		
.XXX	±.XXX		



APPROVALS	DATE	DESCRIPTION
LF	25/DEC/09	RG59A/U BNC M/BNC M
BA	25/DEC/09	

Amphenol Cables on Demand
 20 VALLEY ST. ENDCOTT, NY 13760

SIZE DWG. NO. CO-059BNCX200-XXX

CAD FILE

A

A

SCALE

SHEET

OF

REV. A2

NOTES: UNLESS OTHERWISE SPECIFIED