


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.	NOTES
1	50-00026	Connector, dc plug, 5.5x2.5xL23 mm, molding style, spring contacts	1	
2	30-00418	Wire, 2C TS, 24 AWG, UL2468, 300V, 80°C, 3.0 mm, VW-1, PVC, 87A, red and black	1	
3	24-00003	Overmold, PVC, black	1	

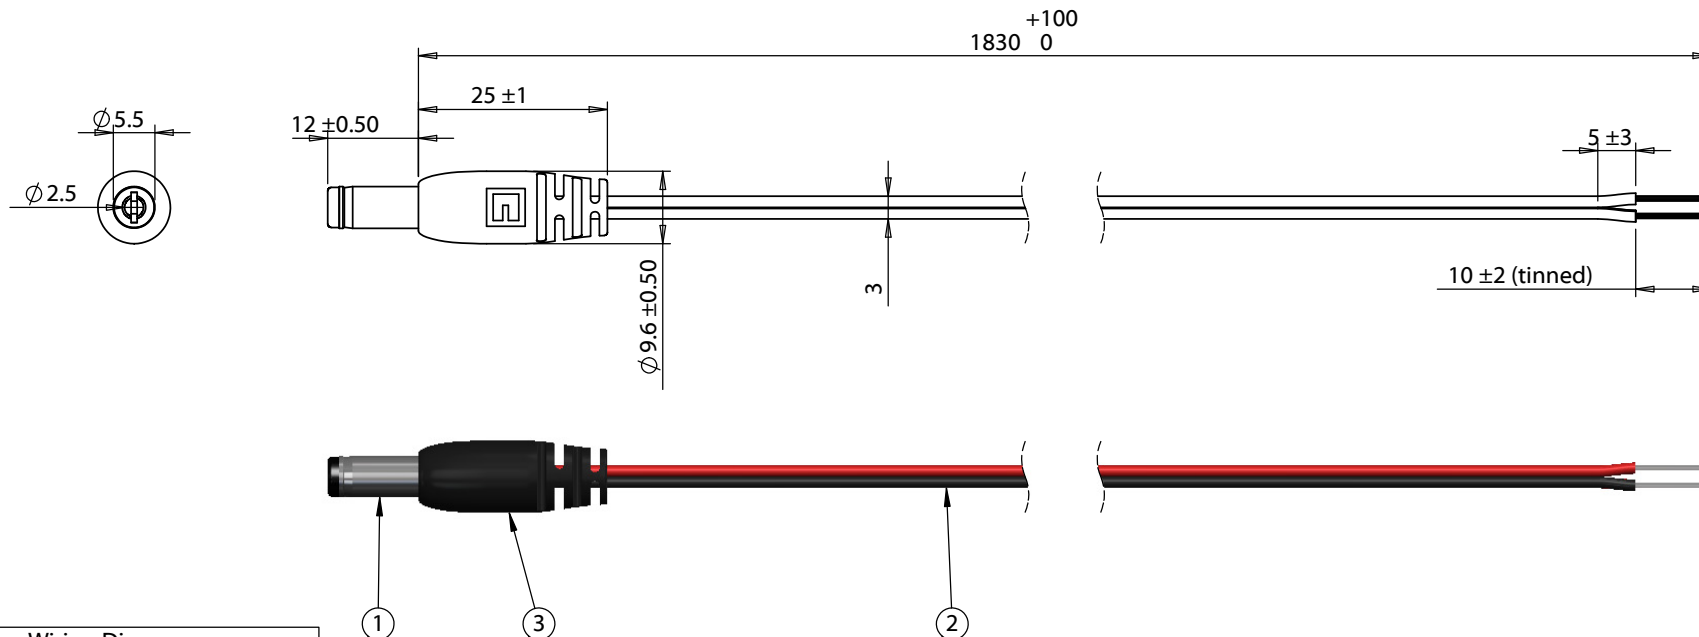

REVISION	DATE	DESCRIPTION	PREPARED:	NOTES	<h1>TENSILITY</h1> <p>20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 800 877.670.7118 www.tensility.com</p>	
A	4/10/2015	Initial release	AG 2015.04.30 10:20:14 -07'00'	Rated for 4 A, 12 Vdc		
A1	4/30/2015	Updated notes section	VERIFIED: JM 2015.05.07 13:18:17 -07'00'	RoHS compliant		
			DIMENSIONS ARE IN MILLIMETERS	Function test: no open, no reversed polarity, no short circuit, no INT		
			TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Functionally equivalent components may be used	DESCRIPTION: Cable, 1830 mm, 5.5x2.5x12 mm 50-00026 dc plug to stripped tinned, 24 AWG, 30-00418 R-B wire	
					SIZE A	PART NUMBER 10-01935
					SCALE: 1:1	SHEET 1 OF 1