


GU256X64F-3100

SIMPLIFIED DATASHEET

Features

Uses the largest VFD in the 256x64 dot size. High-visibility display area, approximately 2x that of GU256X64C.


Physical dimension

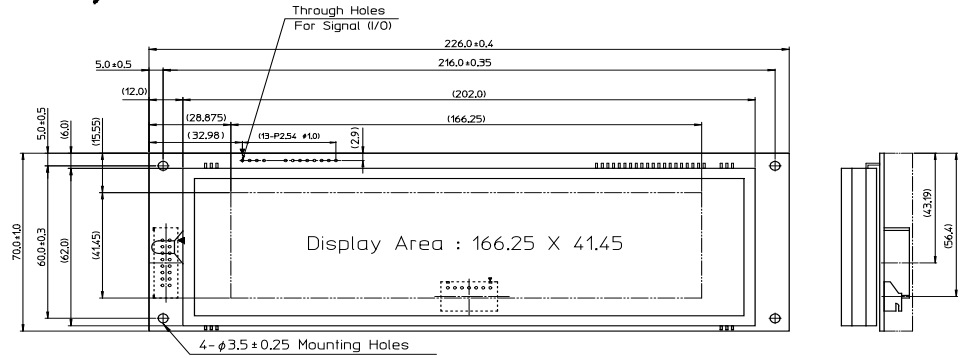

Get full specification



Click here to go to request form.

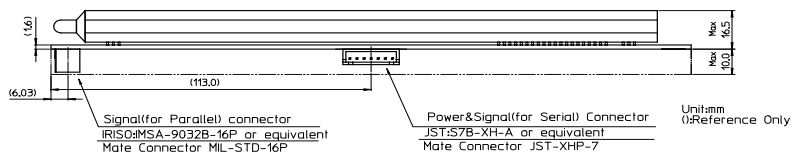

Specifications

Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply voltage	VCC	22.8	24.0	25.2	VDC	-

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Parallel I/F						
Logic input current	I _{pIH}	-	-	1.0	μADC	-
D0-D7,WR	I _{pIL}	-	-	-200	μADC	-
Logic input voltage	V _{pIH}	4.0	-	5.3	VDC	-
D0-D7,WR	V _{pIL}	0	-	1.0	VDC	-
Logic output voltage	V _{pOH}	Open collector output		-	-	-
RDY	V _{pOL}	0	-	0.3	VDC	IOL=4mA
RS-232 I/F						
Logic input voltage	V _{sIH}	3	-	15	VDC	-
RXD, DSR	V _{sIL}	-15	-	-3	VDC	-
Logic output voltage	V _{sOH}	5	-	-	VDC	RL=3KΩ
RXD, DSR	V _{sOL}	-	-	-5	VDC	-
Logic input Impedance	R _{sIN}	3	-	7	KΩ	-
General-purpose I/O port	Abbreviation					
Power Supply Current 1	ICC1	-	280	370	mADC	-
Power Supply Current 2	ICC2	-	230	300	mADC	All dots ON
Power Supply Current 3	ICC3	-	40	60	mADC	All dots OFF
Power Consumption	-	-	6.72	8.88	W	All dots ON

Optical Specifications

Parameter	Value
Luminance	350 cd/m ² Min. (700 cd/m ² Typ.)
Color of illumination	Green (Blue-Green)

Environmental Specifications

Parameter	Value
Operating Temperature	-40 ~ +70 degrees celsius
Storage Temperature	-40 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (non-operating)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	392m/s ² (40G) 9ms X-Y-Z, 3 times each direction

Physical Specifications

Parameter	Value
Number of Dots	16,384 (256 x 64)
Display Area	166.25 mm x 41.45 mm
Dot Size (X x Y)	0.5 mm x 0.5 mm
Dot Pitch (X x Y)	0.65 mm x 0.65 mm
Weight	About 330 g

Interface

Parallel (CMOS), Asynchronous Serial (RS232), I/O port

Pin Assignment

Pin No.	Signal	Pin No.	Signal
1	D7	2	D6
3	D5	4	D4
5	D3	6	D2
7	D1	8	D0
9	GND	10	/WR
11	GND	12	RDY
13	GND	14	GND
15	VCC	16	VCC

(Asynchronous Serial)

Pin No.	Signal	Baud Rate Setting
1	RXD	19200bps
2	DTR	38400bps*
3	DSR	(*:Default setting)
4	TXD	
5	TEST	
6	VCC	
7	GND	

(General-purpose I/O port:Abbreviation)

Selectable Font

Parameter	* ANK(Alphabet, Numeric, Kana)
ANK	All Font Size
International	6 x 8 / 8x16 / 16x32
Japanese	16x16
Japanese	32x32
Character numbers	42 x 8 by ASCII
	16 x 4 by 16 x 16 dot Japanese
	8 x 2 by 32 x 32 dot Japanese

Functions

Parameter	Value
Variable Character display	Variable Action Commands
Scroll function	Line / BOX Draw
Display Power Auto ON/OFF	AND/OR/XOR Mixture display
User Windows function	Program Macro function
I/O Port Control Function	Graphic DMA mode
Bit image	
Variable stored settings	
etc.	



Leaflet contents, and specifications and external appearance of products, may change without notice.

Please confirm product details in the specification.

(C)Copyright NORITAKE ITRON CORP.